


Magnetic Transducer


Abmessungen / Dimensions




Frontansicht / Top View

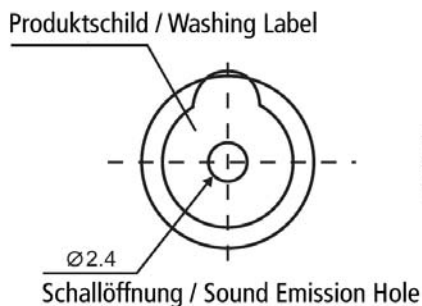

Seitenansicht / Side View

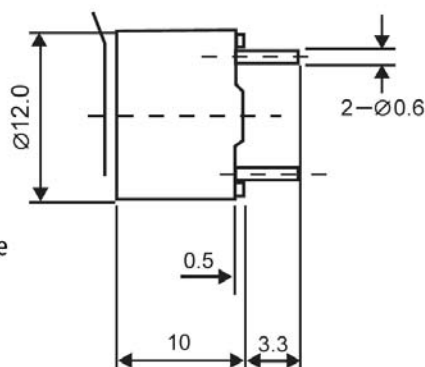

Untenansicht / Bottom View

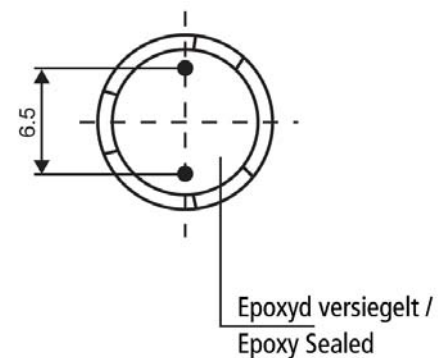

Abmessungen in mm / all dimensions are in mm

Technische Daten

Model Nr.		NMT-1205A
Betriebsspannung	[V]	3 ~ 8
Nennspannung	[V]	5
* Max. Stromstärke	[mA]	50
Spulenwiderstand	[ohm]	40 +/- 5
* Min. Lautstärke	[dBA / 10cm]	85
Resonanzfrequenz	[Hz]	2400
Betriebstemperatur	[°C]	-40 ~ +85
Terminal		Pin
Material		PBT
Farbe		Schwarz
Gewicht	[g]	2


* bei Nennspannung [Resonanzfrequenz, 1/2 duty , Rechteckspannung]
und empfohlener Beschaltung [HFE >200, min. 2.5 mA]

Electrical Specifications

Model No.		NMT-1205A
Operating Voltage	[V]	3 ~ 8
Rated Voltage	[V]	5
* Max. Rated Current	[mA]	50
Coil Resistance	[ohm]	40 +/- 5
* Min.Sound Output	[dBA / 10 cm]	85
Resonant Frequency	[Hz]	2400
Operating Temperature	[°C]	-40 ~ +85
Terminal		Pin
Housing Material		PBT
Colour		Black
Weight	[g]	2

* Value applying rated voltage [resonant frequency, 1/2 duty, square wave]
and recommended circuit [HFE >200, min. 2.5 mA]

Frequenzkurve, Magn dB re 20.000ppa

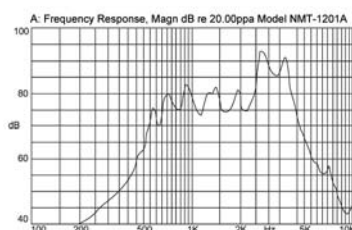

Frequency Response, Magn dB re 20.000ppa

