24V 960W 3 Phase / DRP024V960W3BN





Highlights & Features

- Worldwide AC input voltage range without power de-rating 3 x 320Vac - 600Vac (3-Phase) or 2 x 380Vac - 600Vac
- Power Boost of 150% for 5 seconds
- Full corrosion resistant Aluminium chassis
- Conforms to harmonic current IEC/EN 61000-3-2, Class A
- Conformal coating on PCBA to protect against chemical and dust pollutants
- ATEX and Class I, Div 2 Hazardous Locations Ready

Safety Standards











CB Certified for worldwide use

Model Number: Unit Weight: Dimensions (L x W x D): 121 x 255 x 117.3 mm

DRP024V960W3BN 2.60 kg (5.73 lb) (4.76 x 10.0 x 4.62 inch)

General Description

The CliQ II 3-phase DIN Rail power supply series offers output voltage of 24V. These products are encased in rugged yet lightweight full aluminium body that can withstand shock and vibration according to IEC 60068-2 standard. The DRP024V960W3BN operates over a temperature range of -25°C to +65°C and wide input range for 3-phase from 320Vac to 600Vac or 2-phase from 380Vac to 600Vac, with no power de-rating throughout the entire range. Like the rest of the models in the CliQ series, conformal coating is applied on the PCBA to protect against chemical and dust pollutants. The design conforms to harmonic current emission IEC/EN 61000-3-2 standard.

Model Information

CliQ II DIN Rail Power Supply

Model Number	Input Voltage Range	Rated Output Voltage	Rated Output Current
DRP024V960W3BN	3 x 320-600Vac (3-Phase) or 2 x 380-600Vac (2-Phase)	24Vdc	40.0A

Model Numbering

DR	P	024V	960W	3	В	N
DIN Rail	Power Supply	Output Voltage	Output Power	Three Phase	CliQ II Series	N - Metal Case, without Class I, Div 2



CliQ II DIN Rail Power Supply

24V 960W 3 Phase / DRP024V960W3BN

Specifications

Input Ratings / Characteristics

Nominal Input Voltage	3 x 400-500Vac
Input Voltage Range	3 x 320-600Vac (3-Phase) or 2 x 380-600Vac (2-Phase)
Nominal Input Frequency	50-60Hz
Input Frequency Range	47-63Hz
Nominal DC Input Voltage	500Vdc
DC Input Voltage Range	450-800Vdc
Input Current	< 1.70A @ 3 x 400Vac, < 1.40A @ 3 x 500Vac
Efficiency at 100% Load	> 92.0% @ 3 x 400Vac & 3 x 500Vac
Max Inrush Current	< 40A @ 3 x 400Vac & 3 x 500Vac
Power Factor at 100% Load	> 0.95 @ 3 x 400Vac, > 0.94 @ 3 x 500Vac
Leakage Current	< 3.5mA @ 3 x 600Vac

Output Ratings / Characteristics

Nominal Output Voltage	24Vdc			
Factory Set Point Tolerance	± 2% (initial set point tolerance from factory)			
Output Voltage Adjustment Range	24-28Vdc			
Output Current	40.0A (continuously operating at 24V) 60.0A (Power Boost for 5 seconds at 24V, refer to the details in the Functions section)			
Output Power	960W (continuously operating at 24V) 1440W (Power Boost for 5 seconds at 24V, refer to the details in the Functions section)			
Line Regulation	< 0.5% typ. (@ 3 x 320-600Vac input, 100% load)			
Load Regulation	< 1% typ. (@ 3 x 320-600Vac input, 0-100% load)			
PARD (20MHz)	< 240mVpp			
Rise Time	< 100ms @ nominal input (100% load)			
Start-up Time	< 1,500ms @ nominal input (100% load)			
Hold-up Time	> 20ms @ 3 x 400Vac & 3 x 500Vac (100% load)			
Dynamic Response (Overshoot & Undershoot O/P Voltage)	± 5% @ 10-100% load (@ 3 x 320-600Vac)			
Start-up with Capacitive Loads	10,000μF Max			



24V 960W 3 Phase / DRP024V960W3BN

Mechanical

Case Cover / Chassis		Aluminium	
Dimensions (L x W x D)		121 x 255 x 117.3 mm (4.76 x 10.0 x 4.62 inch)	
Unit Weight		2.60 kg (5.73 lb)	
Indicator		Green LED (DC OK)	
Cooling System		Convection	
Terminal	Input	4 Pins (Rated 600V/35A)	
	Output	6 Pins (Rated 300V/30A)	
Wire	Input	AWG 18-8	
	Output	AWG 12-10	
Mounting Rail		Standard TS35 DIN Rail in accordance with EN 60715	
Noise (1 Meter from power supply)		Sound Pressure Level (SPL) < 40dBA	

Environment

Surrounding Air Temperature	Operating	-25°C to +65°C		
	Storage	-25°C to +85°C		
Power De-rating Vertical Mounting		> 50°C de-rate power by 2.5% / °C		
Operating Humidity		5 to 95% RH (Non-Condensing)		
Operating Altitude		0 to 2,500 Meters (8,200 ft.) for ITE application (@ 50°C) 0 to 2,000 Meters (6,560 ft.) for Industrial application (@ 50°C		
Shock Test Non-Operating		IEC 60068-2-27, 30G (300m/S²) for a duration of 18ms, 2 times per direction, 1 times in total		
Vibration Non-Operating		IEC 60068-2-6, 10Hz to 500Hz @ 30m/S² (3G peak); 60 min per axis for all X, Y, Z direction		
Pollution Degree		2		

Protections

Overvoltage	< 32V, ±10%, SELV Output, Hiccup Mode, Non-Latching (Auto-Recovery)	
Overload / Overcurrent	> 150% of rated load current, Hiccup Mode, Non-Latching (Auto-Recovery)	
Over Temperature	vire < 65°C Surrounding Air Temperature @ 100% Non-Latching (Auto-Recovery)	
Short Circuit Hiccup Mode, Non-Latching (Auto-Recovery when the fault is remov		
Degree of Protection	IP20	
Protection Against Shock	Class I with PE* connection	

^{*}PE: Primary Earth



CliQ II DIN Rail Power Supply

24V 960W 3 Phase / DRP024V960W3BN

Reliability Data

	> 300,000 hrs. as per Telcordia SR-332 I/P: 3 x 400Vac, O/P: 100% load, Ta: 25°C
Expected Cap Life Time	10 years (3 x 400Vac & 3x 500Vac, 50% load @ 40°C)

Safety Standards / Directives

Electrical Equipment in Power Installations		EN 50178 / IEC 62103		
Electrical Safety	SIQ Bauart	EN 60950-1		
	UL/cUL recognized	UL 60950-1 and CSA C22.2 No. 60950-1 (File No. E191395)		
	CB scheme	IEC 60950-1		
Industrial Control Equipment	UL/cUL listed	UL 508 and CSA C22.2 No. 107.1-01 (File No. E315355)		
	CSA	CSA C22.2 No. 107.1-01 (File No. 181564)		
CE		In conformance with EMC Directive 2014/30/EU and Low Voltage Directive 2014/35/EU		
Material and Parts		RoHS Directive 2011/65/EU Compliant		
Galvanic Isolation	Input to Output	4.0KVac		
	Input to Ground	2.0KVac		
	Output to Ground	1.5KVac		



24V 960W 3 Phase / DRP024V960W3BN

EMC


	CISPR 32, EN 55032, CISPR 11, EN 55011, FCC Title 47: Class B		
	EN 61204-3		
	EN 55024, EN 61000-6-2		
IEC 61000-4-2	Level 4 Criteria A ¹⁾ Air Discharge: 15kV Contact Discharge: 8kV		
IEC 61000-4-3	Level 3 Criteria A ¹⁾ 80MHz-1GHz, 10V/M, 80% modulation (1KHz) 1.4GHz-2GHz, 3V/M, 80% modulation (1KHz) 2GHz-2.7GHz, 1V/M, 80% modulation (1KHz)		
IEC 61000-4-4	Level 3 Criteria A ¹⁾ 2kV		
IEC 61000-4-5	Level 3 Criteria A ¹⁾ Common Mode ²⁾ : 2kV Differential Mode ³⁾ : 1kV		
IEC 61000-4-6	Level 3 Criteria A ¹⁾ 150kHz-80MHz, 10Vrms		
IEC 61000-4-8	Criteria A ¹⁾ 30A/Meter		
IEC 61000-4-11	100% dip; 1 cycle (20ms); Self Recoverable		
IEC 61000-4-12	Level 3 Criteria A ¹⁾ Common Mode ²⁾ : 2kV Differential Mode ³⁾ : 1kV		
	IEC/EN 61000-3-2, Class A		
	IEC/EN 61000-3-3		
	IEC 61000-4-3 IEC 61000-4-4 IEC 61000-4-5 IEC 61000-4-6 IEC 61000-4-11		

Criteria A: Normal performance within the specification limits
 Asymmetrical: Common mode (Line to earth)
 Symmetrical: Differential mode (Line to line)




24V 960W 3 Phase / DRP024V960W3BN

Block Diagram

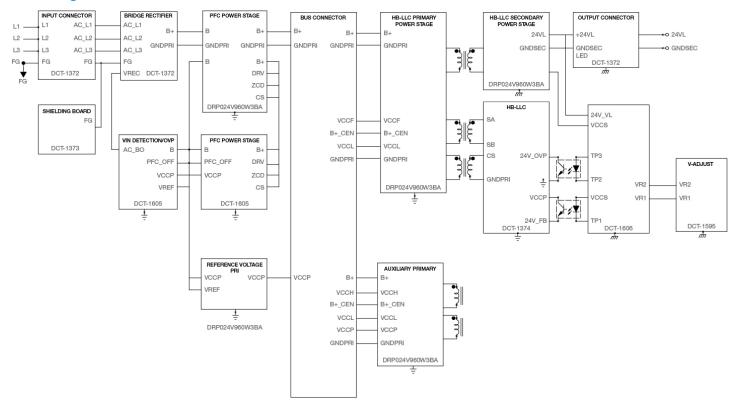

Device Description

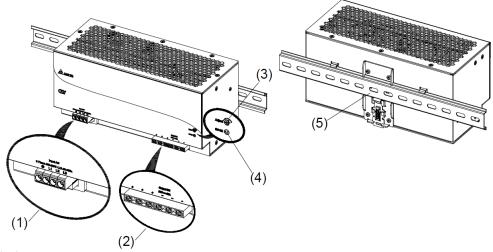

- 1) Input terminal block connector
- 2) Output terminal block connector
- 3) DC Voltage adjustment potentiometer
- 4) DC OK control LED (Green)
- 5) Universal mounting rail system





CliQ II DIN Rail Power Supply


24V 960W 3 Phase / DRP024V960W3BN

Dimensions

L x **W** x **D**: 121 x 255 x 117.3 mm (4.76 x 10.0 x 4.62 inch)







Engineering Data

Output Load De-rating VS Surrounding Air Temperature

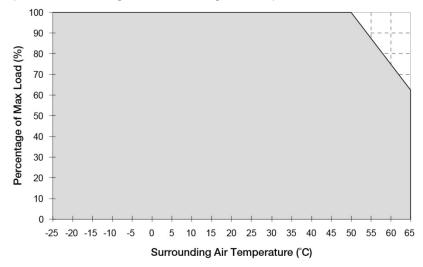


Fig. 1 De-rating for Vertical Mounting Orientation > 50°C de-rate power by 2.5% / °C


Note

- Power supply components may degrade, or be damaged, when the power supply is continuously used outside the shaded region, refer to the graph shown in Fig. 1.
- 2. If the output capacity is not reduced when the surrounding air temperature >50°C (Vertical), the device may run into Over Temperature Protection. When activated, the output voltage will go into bouncing mode and will recover when the surrounding air temperature is lowered or the load is reduced as far as necessary to keep the device in working condition.
- In order for the device to function in the manner intended, it is also necessary to keep a safety distance of 5mm (0.20 inch) for Vertical Mounting with adjacent units while the device is in operation.
- Depending on the surrounding air temperature and output load delivered by the power supply, the device can be very hot!
- 5. If the device has to be mounted in any other orientation, please contact info@deltapsu.com for more details.



24V 960W 3 Phase / DRP024V960W3BN

Output Load De-rating VS Input Voltage

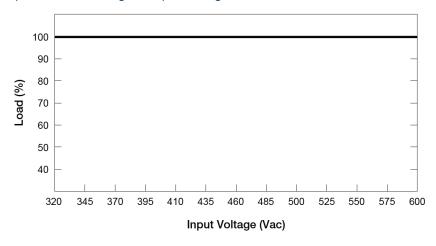


No output power de-rating across the entire input voltage range 3 x 320-600Vac (3-Phase) or 2 x 380-600Vac (2-Phase)

Assembly & Installation

The power supply unit (PSU) can be mounted on 35mm DIN rails in accordance with EN 60715. For Vertical Mounting, the device should be installed with input terminal block at the bottom.

Each device is delivered ready to install.

Mounting







Fig. 2.1 Mounting

Snap on the DIN rail as shown in Fig. 2.1:

- 1. Tilt the unit upwards and insert it onto the DIN rail.
- 2. Push downwards until stopped.
- 3. Press against the bottom front side for locking.
- 4. Shake the unit slightly to ensure that it is secured.

Dismounting






Fig. 2.2 Dismounting

To uninstall, pull or slide down the latch with screw driver as shown in Fig. 2.2. Then slide the power supply unit (PSU) in the opposite direction, release the latch and pull out the power supply unit (PSU) from the rail.

In accordance to EN60950 / UL60950, flexible cables require ferrules. Use appropriate copper cables designed to sustain operating temperature of:

- 1. 60°C, 60°C / 75°C for USA
- 2. At least 75°C for ambient not exceeding 60°C, and 90°C for ambient exceeding 60°C for Canada.




CliQ II DIN Rail Power Supply

24V 960W 3 Phase / DRP024V960W3BN

Safety Instructions

Vertical Mounting

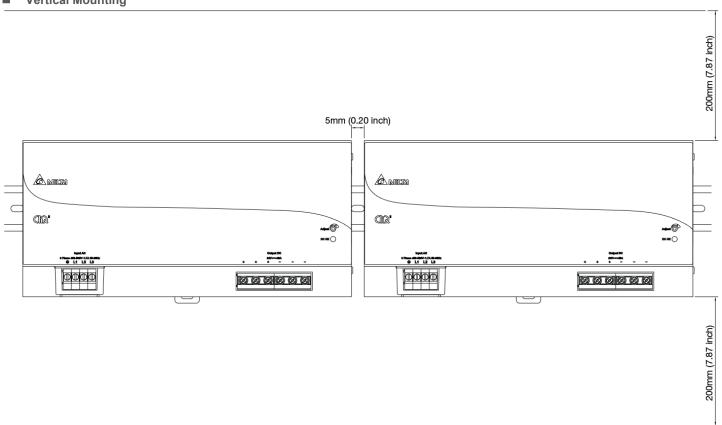

- ALWAYS switch mains of input power OFF before connecting and disconnecting the input voltage to the unit. If mains are not turned OFF, there is risk of explosion / severe damage.
- To guarantee sufficient convection cooling, keep a distance of 200mm (7.87 inch) above and below the device as well as a lateral distance of 5mm (0.20 inch) to other units.
- Note that the enclosure of the device can become very hot depending on the surrounding air temperature and load of the power supply. Risk of burns!
- Only plug in and unplug connectors when power is turned off!
- DO NOT insert any objects into the unit.
- Hazardous voltages may be present for up to 5 minutes after the input mains voltage is disconnected. Do not touch the unit during this time.
- The power supplies unit should be installed in minimum IP54 rated enclosure.
- The power supplies are built in units and must be installed in a cabinet or room (condensation free environment and indoor location) that is relatively free of conductive contaminants.




CliQ II DIN Rail Power Supply

24V 960W 3 Phase / DRP024V960W3BN

Functions

■ Graph illustrating the Start-up Time, Rise Time, and Hold-up Time

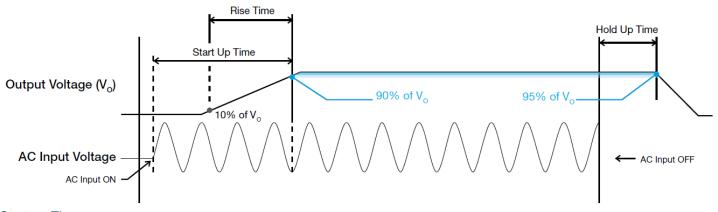

Start-up Time

The time required for the output voltage to reach 90% of its final steady state set value, after the input voltage is applied.

Rise Time


The time required for the output voltage to change from 10% to 90% of its final steady state set value.

Hold-up Time

Time between the collapse of the AC input voltage, and the output falling to 95% of its steady state set value.


Inrush Current

Inrush current is the peak, instantaneous, input current measured and, occurs when the input voltage is first applied. For AC input voltages, the maximum peak value of inrush current will occur during the first half cycle of the applied AC voltage. This peak value decreases exponentially during subsequent cycles of AC voltage.

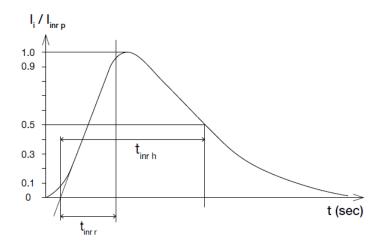

Dynamic Response

The power supply output voltage will remains within $\pm 5\%$ of its steady state value, when subjected to a dynamic load from 10% to 100% of its rated current.



CliQ II DIN Rail Power Supply

24V 960W 3 Phase / DRP024V960W3BN

Power Boost

Power Boost is the reserve power available constantly that allows reliable startup to support sudden and short spike of loads with high inrush current typically during turn on to remove the need of more expensive higher rated power supply unit. After the output has reached its steady state set value, the power supply can support surge loads with a higher short-term power demand up to 150% of maximum rated load (Io Max), for a maximum duration of 5 seconds. The Power Boost is also available to repeatedly basis with according to the condition of an average (R.M.S) output power shall not exceed continuous operating condition or refer to duty cycle calculation below.

$$Duty\ cycle\ (\%) = \frac{T_P}{Total\ Time}$$

$$Average\ Output\ Power\ (P_{Avg}) = \frac{(Power\ Boost\ \times T_P) + (Non-Peak\ Power\ \times T_N)}{Total\ Time}$$

OR

$$Non\text{-}Peak\ Power = \frac{\left(P_{Avg} \times Total\ Time\right) - \left(Power\ Boost\ \times T_P\right)}{T_N}$$

■ An example of Power Boost and Average Output Power

Power Boost	Peak Power (W _P)	Power Boost Duration (T _P)	Duty Cycle	Non-Peak Power (W _N)	Non-Peak Power Duration (T _N)	Total Time (T)
150%	1440	5 sec	10%	907W	45 sec	50 sec
150%	1440	5 sec	35%	702W	9.3 sec	14.3 sec
120%	1152	10 sec	20%	912W	40 sec	50 sec
120%	1152	10 sec	35%	856W	18.5 sec	28.5 sec

It is not recommended to prolong the duration of Power Boost to be longer than the specified duty cycle calculation, this may cause damage to the PSU.

External Input Protection Device


The unit is protected with internal fuse (not replaceable) at L pin and it has been tested and approved on 20A (UL) and 16A (IEC) branch circuits without additional protection device. An external protection device is only required if the supplying branch has an ampacity greater than above. Thus, if an external protective device is necessary, or, utilized, please refer a minimum value in instruction sheet with B or C characteristic breaker.



24V 960W 3 Phase / DRP024V960W3BN

Overload & Overcurrent Protections (Auto-Recovery)

The power supply's Overload (OLP) and Overcurrent (OCP) Protections will be activated when output current exceeds 150% of $I_{\rm O}$ (Max load). In such occurrence, the $V_{\rm O}$ will start to droop and once the power supply has reached its maximum power limit, the protection is activated and the power supply will go into "Hiccup mode" (Auto-Recovery). The power supply will recover once the fault condition of the OLP and OCP is removed and $I_{\rm O}$ is back within the specifications.




It is not recommended to prolong the duration of I_O when it is <150% but >100%, since it may cause damage to the PSU.

Short Circuit Protection (Auto-Recovery)

The power supply's output OLP/OCP function also provides protection against short circuits. When a short circuit is applied, the output current will operate in "Hiccup mode", as shown in the illustration in the OLP/OCP section on this page. The power supply will return to normal operation after the short circuit is removed.

Overvoltage Protection (Auto-Recovery)

The power supply's overvoltage circuit will be activated when its internal feedback circuit fails. The output voltage shall not exceed its specifications defined on Page 3 under "Protections".



Over Temperature Protection (Auto-Recovery)


As described in load de-rating section, the power supply also has Over Temperature Protection (OTP). In the event of a higher operating temperature at 100% load, the power supply will run into OTP when the operating temperature is beyond what is recommended in the de-rating graph. When activated, the output voltage will go into bouncing mode until the temperature drops to its normal operating temperature as recommended in the derating graph.



24V 960W 3 Phase / DRP024V960W3BN

Operating Mode

Redundant Operation

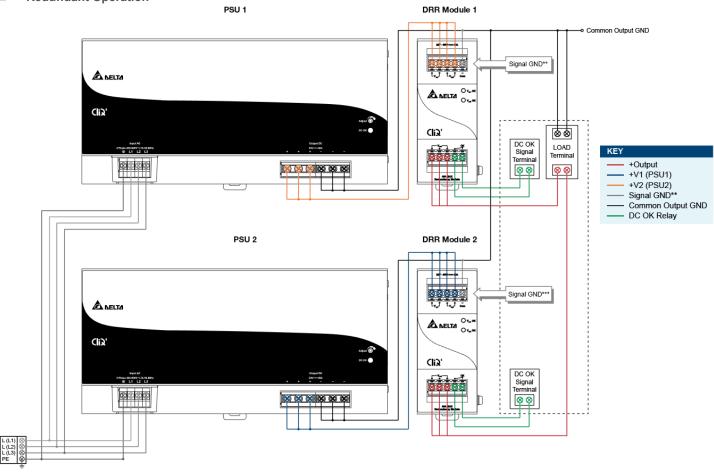

^{**}The Signal GND in the DRR module is for the built-in LED and DC OK signals. The Output GND terminals from the two PSU's do not need to be connected to the Signal GND terminal.

Fig. 3 Redundant Operation Connection Diagram

In order to ensure proper redundancy operation for the power supply unit (PSU), ensure that the output voltage difference between the two units must be kept at 0.45~0.50V for 24V supplies. Follow simple steps given below to set them up for the redundant operation:

Step 1.

Measure output voltage of PSU 1 and PSU 2. If PSU 1 is the master unit, then V_0 of PSU 1 must be higher than PSU 2. In order to set the output voltage, individually connect the power supply to 50% of rated load at any line voltage of 3 x 320-600Vac (3-Phase) or 2 x 380-600Vac (2-Phase), and set the PSU 1 and PSU 2 output voltage.

Step 2.

Connect the right DRR module, 40A as per the system requirement to the power supply units. PSU 1 should be connected to DRR Module 1 at V_{in} 1 & V_{in} 2, and PSU 2 should be connected to DRR Module 2 at V_{in} 1 & V_{in} 2.

Step 3.

Connect the system load from V_{out} . Please note that output voltage V_{out} from DRR module will be = V_0 (output voltage of power supply) – V_{drop}^* (in DRR module).



^{*}V_{drop} will vary from 0.60V to 0.90V (Typical 0.65V) depending on the load current and surrounding air temperature.

24V 960W 3 Phase / DRP024V960W3BN

Parallel Operation

The power supply units (PSUs) can also be used for parallel operation in order to increase the output power. The difference in output voltage between the two units must be kept to within 25mV of each other. This difference must be verified with the same output load connected independently to each unit.

Parameters such as EMI, inrush current, leakage current, PARD, start up time will be different from those on the datasheet, when two units are connected in parallel. The user will need to verify that any differences will still allow the two power supplies connected in parallel will work properly in their product/application.

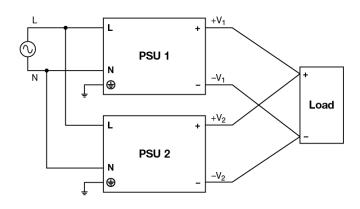


Fig. 4 Parallel Operation Connection Diagram

Others

Delta RoHS Compliant



Restriction of the usage of hazardous substances

The European directive 2011/65/EU limits the maximum impurity level of homogeneous materials such as lead, mercury, cadmium, chrome, polybrominated flame retardants PBB and PBDE for the use in electrical and electronic equipment. RoHS is the abbreviation for "Restriction of the use of certain hazardous substances in electrical and electronic equipment".

This product conforms to this standard.

Conformal Coating



The Protective Coating Technology

Delta Electronics Group has designed the perfect dipping technique which penetrates everywhere including under device, and prevents leakage. The conformal coating dipping can be applied to PCBs or circuit board. The coating preserves the performance of precision electronic primarily by preventing ionizable contaminants such as salt from reaching circuit nodes, where the material slumps around sharp edges. This can be a problem especially in highly conversing atmosphere.

PFC - Norm EN 61000-3-2



Line Current Harmonic content

Typically, the input current waveform is not sinusodial due to the periodical peak charging of the input capacitor. In industrial environment, complying with EN 61000-3-2 is only necessary under special conditions. Complying to this standard can have some technical drawbacks, such as lower efficiency as well as some commercial aspects such as higher purchasing costs. Frequently, the user does not profit from fulfilling this standard, therefore, it is important to know whether it is mandatory to meet this standard for a specific application.

Attention

Delta provides all information in the datasheets on an "AS IS" basis and does not offer any kind of warranty through the information for using the product. In the event of any discrepancy between the information in the catalog and datasheets, the datasheets shall prevail (please refer to **www.DeltaPSU.com** for the latest datasheets information). Delta shall have no liability of indemnification for any claim or action arising from any error for the provided information in the datasheets. Customer shall take its responsibility for evaluation of using the product before placing an order with Delta.

Delta reserves the right to make changes to the information described in the datasheets without notice.

