

LED Power Supply

Constant Voltage Driver Series

- Long lasting and high reliability,
- Extra small compact housing,
- Suitable for use with desk/table lamp, floor lamp
- and other indoor LED applications



Approval marks



Item	Value Unit Remarks
------	------------------------

1. Input

Nominal voltage	220 – 240 VAC
Nominal frequency	50 - 60 Hz
AC voltage range	200 – 264 VAC Permitted voltage range
DC voltage range	NA V
Maximum voltage	264 V
Nominal current	250 mA 230V @ 36W load
Total Harmonic Distortion (THD)	NA
Power factor	0.9 Full load, 230 V, 50 Hz
Efficiency	>87% Full load, 230 V, 50 Hz, typical
No-load power	< 0.5 W 230V, typical
Stand-by power	NA W
Power loss	5.37W at 230V input @ 36W load max.
Input power	41.37W at 230V input @ 36W load max.
Protection class	II
Inrush current	< 5 A twidth = 100 µs typical (measured at 50% Ipeak)

2. Output

Nominal voltage range	24VDC
Maximum voltage	25VDC Open circuit
Nominal current range	1500 mA
Voltage accuracy	+/- 5 %
Nominal power range	0-36 W Partial Load.
Maximum power	36 W Ta ≤ 35°C,
Safety isolation	SELV-equivalent 3.000 kVrms . Touch current < 0.7 mA

3. Environment


Ambient temperature range t_a	-20 ... +35°C
Maximum case temperature t_c	85 °C Measured on t_c point indicated of the product label
Max. Case temp. in fault condition	110 °C
Storage temperature range	-25 ... +75 °C Cool down before operating
Relative humidity	5 ... 80 % Not condensing
Surge transient protection	1 kV L/N acc. IEC 61000-3-2 (ANSI C62.41 Cat.A ...)
Environmental rating	Indoor
IP rating	IP 20
Mains switching cycles	> 50'000
Expected lifetime	30'000 hrs @ $t_a = 45^\circ\text{C}$, $t_c = 85^\circ\text{C}$, 10% failure rate
	50'000 hrs @ $t_a = 35^\circ\text{C}$, $t_c = 75^\circ\text{C}$, 10% failure rate

4. Protection

Overheating protection	yes, automatic reversible
Overload protection	yes, automatic reversible
Short-circuit protection	yes, automatic reversible
Hot plug-in protection	No, Hot plug-in or secondary switching of LEDs is not permitted and may cause a very high current to the LEDs.

5. Dimension Weight

Dimensions	95x55x45mm
Weight	NA
Max. cable length	2m
Cable crosssection, input side	NA
Cable crosssection, output side	0.2...1.5 mm ²

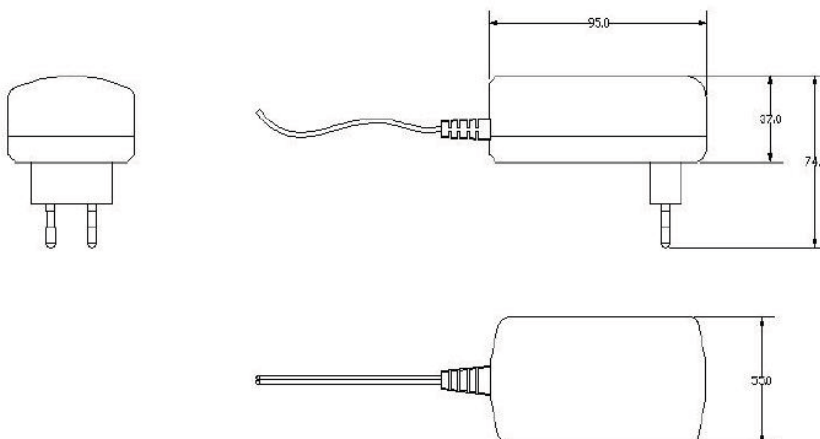

AW06-24VD36

Safety and EMC standard

Safety according to
EN 61347-1 , 61347-2-13, 62493
RI suppression according to EN 55015 /CDN
Line harmonics according to EN 61000-3-2
Immunity according to EN 61547

Disclaimer

The information in this data sheet subject to change without notice.
Always make sure to use the most recent release, or consult with us before your final selection.