

LED Power Supply Constant Voltage Driver Series

- Long lasting and high reliability,
- Extra small compact housing,
- Suitable for use with downlights, Spotlights, and other indoor LED applications



Approval marks



Item	Value Unit Remarks
------	------------------------

1. Input

Nominal voltage	220~240 Vac
Nominal Frequency	50 / 60 Hz
AC Voltage Range	200 – 264 VAC Permitted voltage range
DC Voltage Range	NA
Maximum Voltage	264 V
Nominal Current	450 mA 230V @ 30W load
Total Harmonic Distortion (THD)	< 20 % Full load, 230 V, 50 Hz
Power Factor	0.9 Full load, 230 V, 50 Hz
Efficiency	87% Full load, 230 V, 50 Hz, typical
No-load Power	< 0.5 W 230V, typical
Stand-by power	NA
Power loss	8.5 W at 230V input @ 60W load max.
Input power	68.5 W at 230V input @ 60W load max.
Protection class	II
Inrush current	< 5 A twidth = 100 µs typical (measured at 50% Ipeak)

2. Output

Nominal voltage range	24VDC
Maximum voltage	25VDC Open circuit
Nominal current range	2500mA
Current accuracy	+/- 5 %
Nominal power range	0-60 W Partial Load.
Maximum power	60 W Ta ≤ 45°C,
Safety isolation	SELV-equivalent 3,0 kVrms . Touch current < 0.7 mA

3. Environment



Ambient temperature range t_a	-20 ... +45°C
Maximum case temperature t_c	85 °C Measured on t_c point indicated of the product label
Max. Case temp. in fault condition	110 °C
Storage temperature range	-25 ... +75 °C Cool down before operating
Relative humidity	5 ... 80 % Not condensing
Surge transient protection	1 kV L/N acc. IEC 61000-3-2 (ANSI C62.41 Cat.A ...)
Environmental rating	Indoor
IP rating	IP 20
Mains switching cycles	> 50'000
Expected Lifetime	30'000 @ $t_a = 45^\circ\text{C}$, $t_c = 85^\circ\text{C}$, 10% failure rate
	50'000 @ $t_a = 35^\circ\text{C}$, $t_c = 75^\circ\text{C}$, 10% failure rate

4. Protection

Overheating Protection	yes, automatic reversible
Overload Protection	yes, automatic reversible
Short Circuit protection	yes, automatic reversible
Hot plug-in protection	No, Hot plug-in or secondary switching of LEDs is not permitted and may cause a very high current to the LEDs.

5. Dimension Weight

Dimensions	166 x 50 x 32mm
Weight	180g
Max. cable length	1.2m
Cable crosssection, input side	0.5...1.5 mm ²
Cable crosssection, output side	0.2...1.5 mm ²

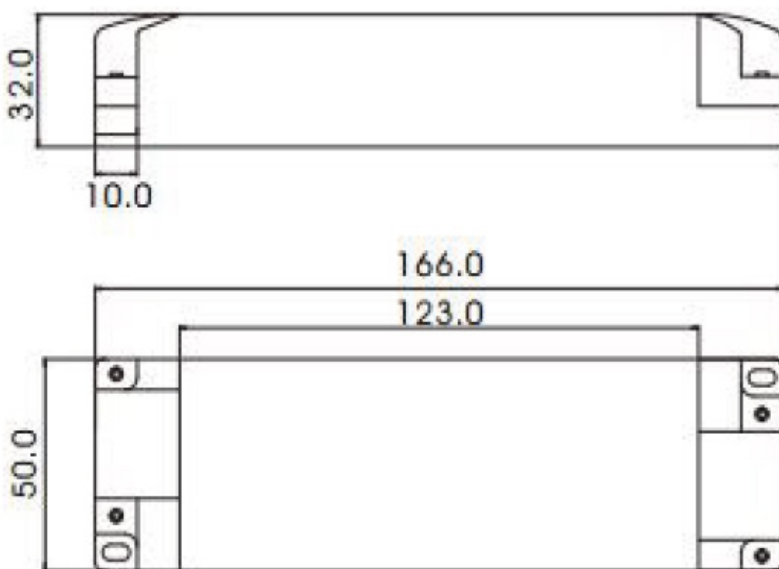

AW06-24VP60

Safety and EMC standard

Safety according to

EN 61347-1 , 61347-2-13, 62493


RI suppression according to EN 55015 /CDN

Line harmonics according to EN 61000-3-2

Immunity according to EN 61547


Variable Input Vs Efficiency

Vin =180Vac-260Vac/50Hz; Loading with DV 24V 2500mA

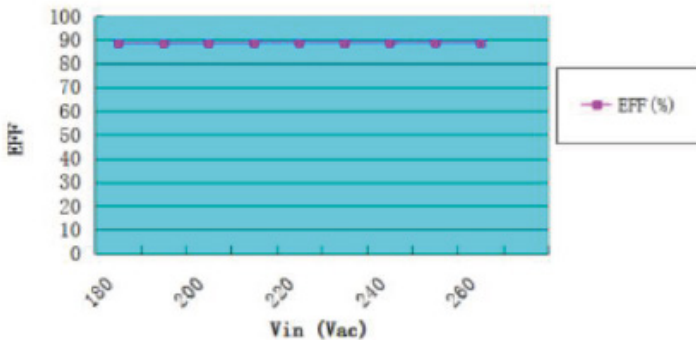


Variable Input Vs Vout Measurement

Vin =180Vac-260Vac/50Hz; Loading with DV 24V 2500mA

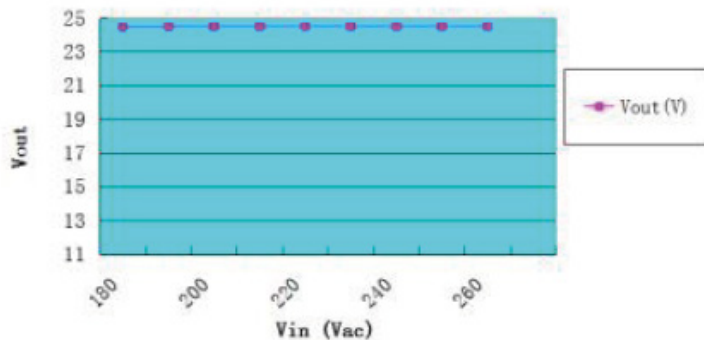

Variable Input Vs PF Measurement

Vin =180Vac-260Vac/50Hz; Loading with DV 24V 2500mA

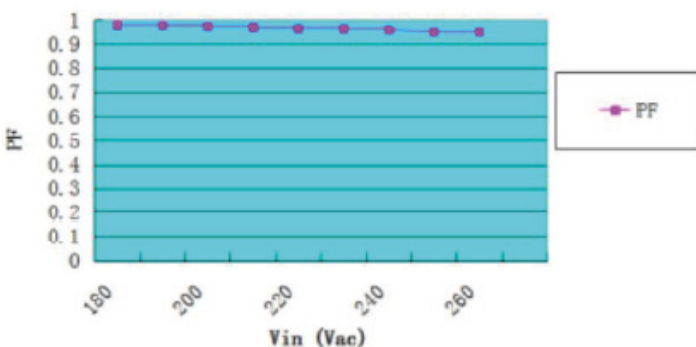

Disclaimer

The information in this data sheet subject to change without notice.

Always make sure to use the most recent release, or consult with us before your final selection.