


LED Power Supply

Constant Current Driver

- Long lasting and high reliability,
- Extra small compact housing,
- Suitable for use with desk/table lamp, floor lamp
- and other indoor LED applications

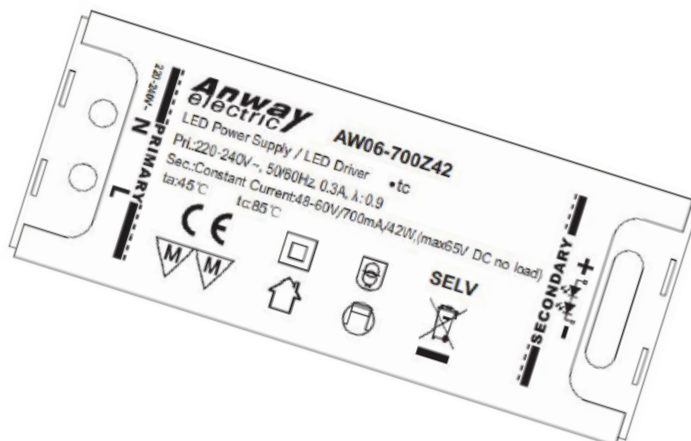

Approval marks



Item	Value Unit Remarks
1. Input	
Nominal voltage	220~240 Vac
Nominal Frequency	50 - 60 Hz
AC Voltage Range	200 – 264 VAC Permitted voltage range
DC Voltage Range	NA V
Maximum Voltage	264V
Nominal Current	210 mA 230V @ 42W load
Total Harmonic Distortion (THD)	≤ 10% 230V @42W load
Power Factor	0.96 Full load, 230 V, 50 Hz
Efficiency	90.5% Full load, 230 V, 50 Hz, typical
No-load Power	< 0.5 W 230V, typical
Stand-by power	NA W
Power loss	4.4W at 230V input @ 42W load max.
Input power	46.4W at 230V input @ 42W load max.
Protection class	II
Inrush current	< 25 A twidth = 100 μs typical (measured at 50% Ipeak)

2. Output

Nominal voltage range	48-60VDC
Maximum voltage	65VDC Open circuit
Nominal current range	700mA
Current accuracy	+/- 5 %
Nominal power range	33.6 - 42 W
Maximum power	42 W Partial Load
Flicker	Flicker free
Safety isolation	SELV-equivalent 3,000 kVrms . Touch current < 0.5 mA

3. Environment


Ambient temperature range t_a	-20 ... +45°C
Maximum case temperature t_c	85 °C Measured on t_c point indicated of the product label
Max. Case temp. in fault condition	110 °C
Storage temperature range	-25 ... +75 °C Cool down before operating
Relative humidity	5 ... 80 % Not condensing
Surge transient protection	1 kV L/N acc. IEC 61000-3-2 (ANSI C62.41 Cat.A ...)
Environmental rating	Indoor
IP rating	IP 20
Mains switching cycles	> 50'000
Expected Lifetime	50'000 hrs @ $t_a = 45^\circ\text{C}$, $t_c = 85^\circ\text{C}$, 10% failure rate
	60'000 hrs @ $t_a = 35^\circ\text{C}$, $t_c = 75^\circ\text{C}$, 10% failure rate

4. Protection

Overheating Protection	yes, automatic reversible
Overload Protection	yes, automatic reversible
Short Circuit protection	yes, automatic reversible
Hot plug-in protection	No, Hot plug-in or secondary switching of LEDs is not permitted and may cause a very high current to the LEDs.

5. Dimension Weight


Dimensions	127.2 x 42.7 x 25 mm
Weight	110g
Max. cable length	1.2m
Cable crosssection, input side	0.5...1.5 mm ²
Cable crosssection, output side	0.2...1.5 mm ²

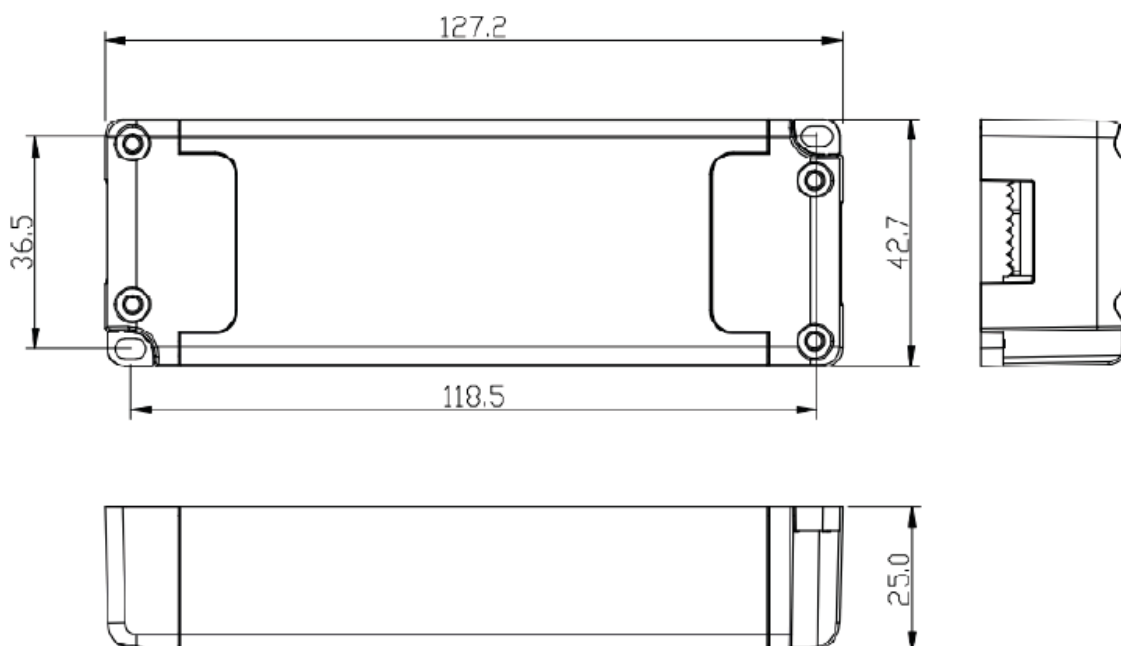


Safety and EMC standard

Safety according to
EN 61347-1 , 61347-2-13, 62493
RI suppression according to EN 55015 /CDN
Line harmonics according to EN 61000-3-2
Immunity according to EN 61547


Variable Input Vs Efficiency

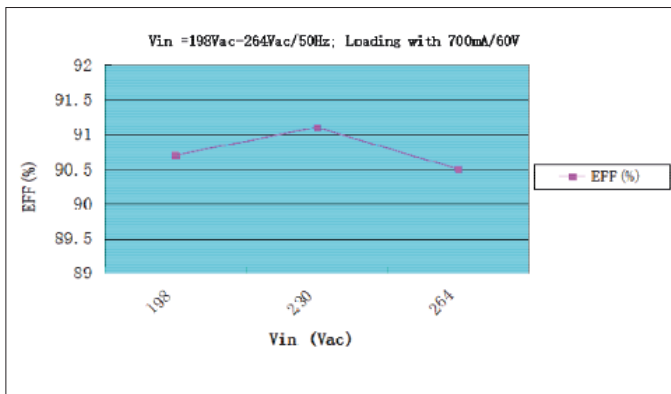


Variable Input Vs Iout Measurement

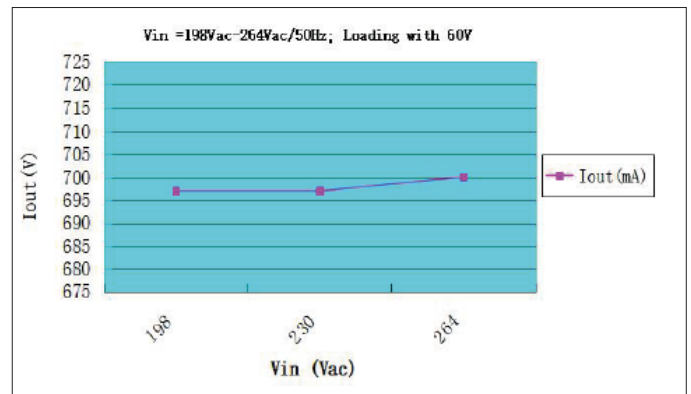

Variable Input Vs PF Measurement

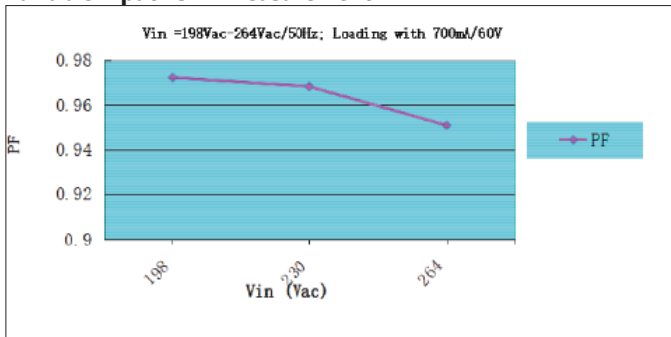

Variable output Vs Iout Measurement

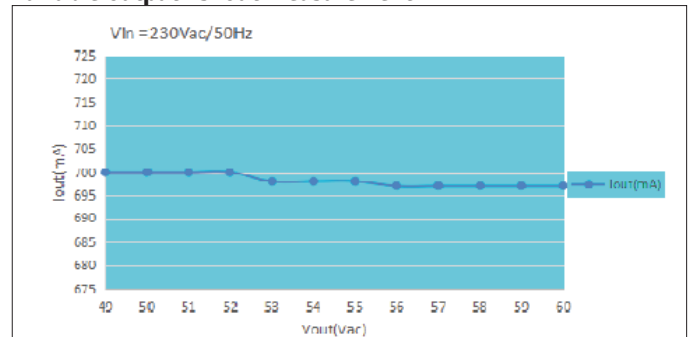

Disclaimer

The information in this data sheet subject to change without notice.
Always make sure to use the most recent release, or consult with us before your final selection.