

LED Power Supply

Constant Voltage Driver 24 V_{DC} | 1050mA

- Long lasting and high reliability
- Extra small compact housing
- Suitable for use with downlights, Spotlights and other indoor LED applications



Safety and EMC standard

- Safety according to EN 61347-1, 61347-2-13, 62493
- RI suppression according to EN 55015 / CDN
- Line harmonics according to EN 61000-3-2
- Immunity according to EN 61547

Approval marks



Item	Value/Unit /Remarks
------	---------------------

1. Input

Nominal voltage	220 – 240 VAC
Nominal frequency	50 - 60 Hz
AC voltage range	200 – 264 VAC Permitted voltage range
DC voltage range	NA V
Maximum voltage	264 V
Nominal current	137 mA 230V @ 25W load
Total Harmonic Distortion (THD)	< 20 % Full load, 230 V, 50 Hz
Power factor	0.9 Full load, 230 V, 50 Hz
Efficiency	≥87% Full load, 230 V, 50 Hz, typical
No-load power	< 0.5 W 230V, typical
Stand-by power	NA W
Power loss	4 W at 230V input @ 25W load max.
Input power	29 W at 230V input @ 25W load max.
Protection class	II
Inrush current	< 5 A twidth = 100 µs typical (measured at 50% Ipeak)

2. Output

Nominal voltage range	24 VDC
Maximum voltage	25 VDC Open circuit
Maximum current range	1050 mA
Voltage accuracy	+/- 5 %
Nominal power range	0-25 W Partial Load.
Maximum power	25 W Ta ≤ 45°C,
Safety isolation	SELV-equivalent 3000Vrms Touch current < 0.7 mA

3. Environment




Ambient temperature range t_a	-20 ... +40°C
Maximum case temperature t_c	85 °C Measured on t_c point indicated of the product label
Max. Case temp. in fault condition	110 °C
Storage temperature range	-25 ... +75 °C Cool down before operating
Relative humidity	5 ... 80 % Not condensing
Surge transient protection	1 1 kV L/N LN/PE acc. IEC 61000-3-2 (ANSI C62.41 Cat.A ...)
Environmental rating	Indoor
IP rating	IP 20
Mains switching cycles	> 50'000
Expected lifetime	30'000 hrs $t_a = 45^\circ\text{C}$, $t_c = 85^\circ\text{C}$, 10% failure rate
	50'000 hrs $t_a = 35^\circ\text{C}$, $t_c = 85^\circ\text{C}$, 10% failure rate

4. Protection


Overheating protection	yes, automatic reversible
Overload protection	yes, automatic reversible
Short-circuit protection	yes, automatic reversible
Hot plug-in protection	No, Hot plug-in or secondary switching of LEDs is not permitted and may cause a very high current to the LEDs.

5. Dimension | Weight


Dimensions	131 x 43 x 24.8 mm
Weight	125g
Max. cable length	1.2m
Cable crosssection, input side	0.5-1.5 mm ²
Cable crosssection, output side	0.75-1.5 mm ²

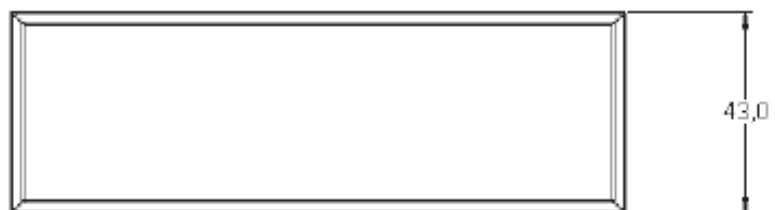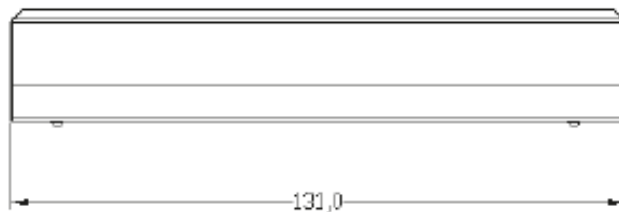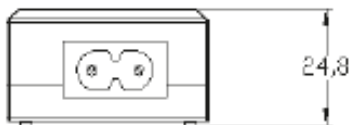


6.1 Variable Input Vs Efficiency

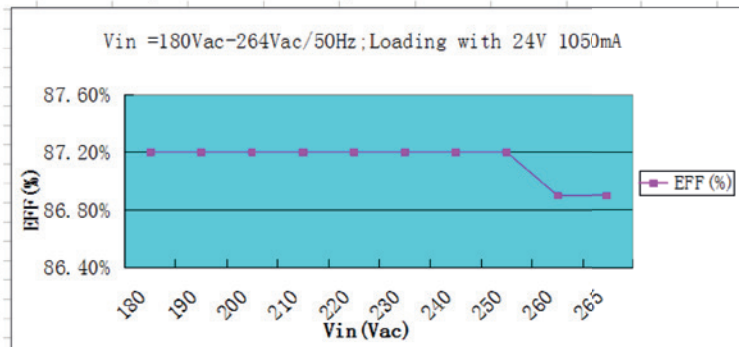

6.2 Variable Input Vs Vout Measurement

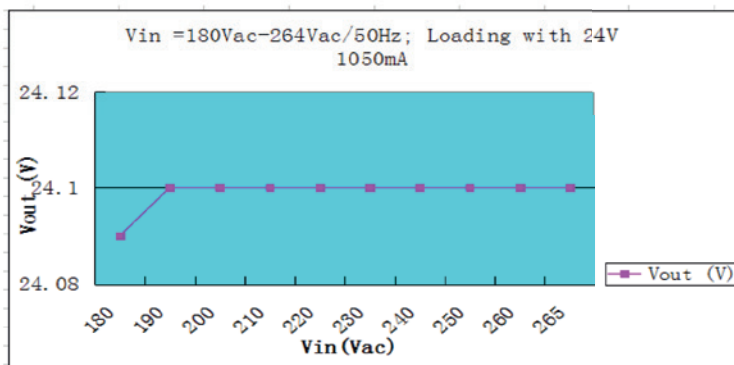

6.3 Variable Input Vs PF Measurement

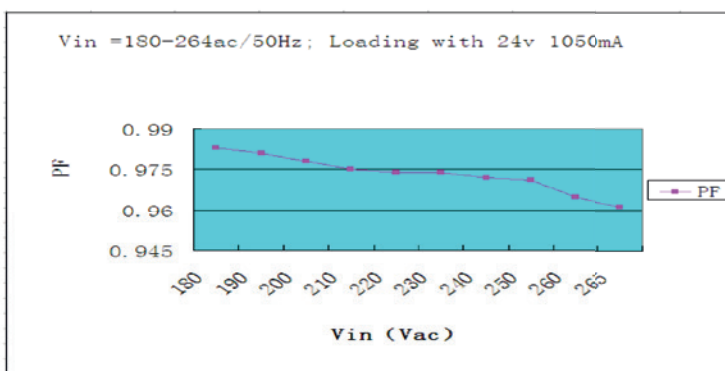

7. Disclaimer

The information in this data sheet subject to change without notice,
Always make sure to use the most recent release, or consult with us before your final selection.