


F/SWB-03-01

Technische Daten Techn. Terms	Bedingungen Conditions	Wert Value
Betriebsspannungsbereich <i>Operating Voltage</i>	DC	2...5 V
Nennspannung <i>rated Voltage</i>	DC	3 V
Max. Stromaufnahme <i>Current Consumption</i>	bei Nennspannung <i>at rated voltage</i>	≤ 35mA
Lautstärke <i>SPL</i> bei Nennspannung <i>at rated voltage</i>	Abstand <i>Distance</i> 20 cm	≥75 dB
Frequenzbereich <i>Frequency Range</i>		400 ± 100 Hz
Reaktionszeit <i>Response time</i>		≤ 330 msec
Betriebstemperatur <i>Operating Temperature</i>		- 20... + 60 °C
Lagertemperatur <i>Storage temperature</i>		- 30... + 70°C
Gewicht <i>weight</i>		10 g

Zeichnungen *Drawings*

Diese Zeichnung ist unser Eigentum. Vervielfältigung unbefugte Verwertung, Mitteilung an andere ist strafbar und Schadensersatzpflichtig

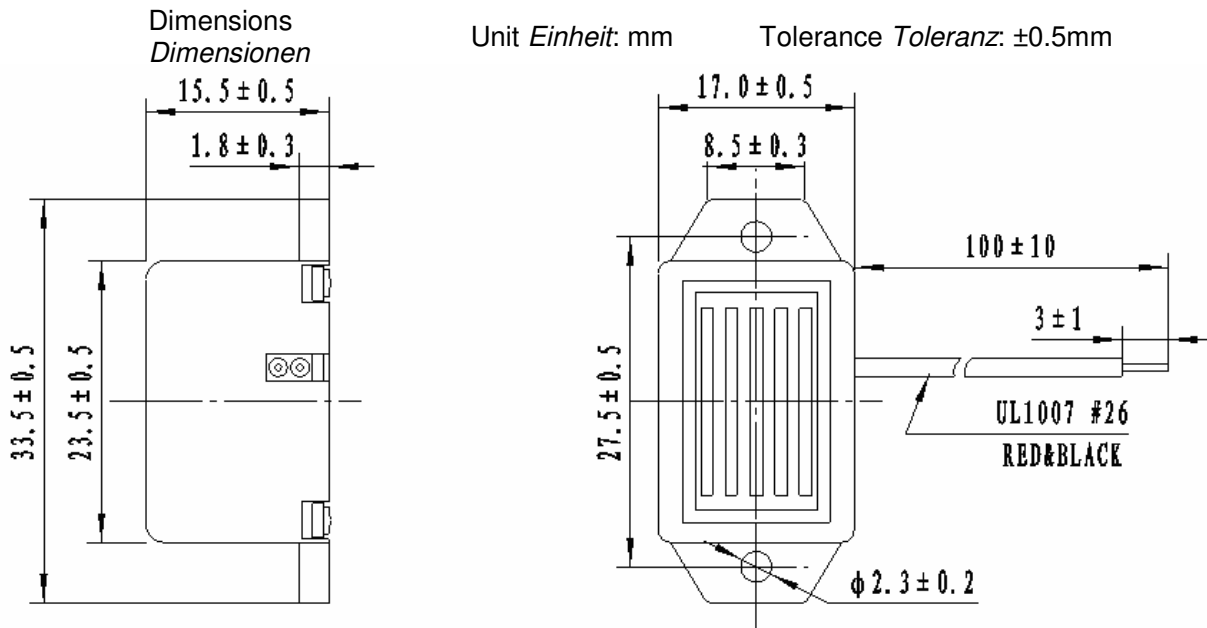

DIGISOUND	Halbzeug, Werkstoff				Untolerierte Maße	Zeichn.-Nr. 951101.3B
					Maßstab	Ersatz f. Zeichn.
Vervielfält.-Pause Nr.	Tag	Name	And. zust.	And.-Mittlg. Nr.	Tag	Name
	gezeichnet		1	Version -01	19.11.2007	GS
	bearbeitet	28.01.97	Bär			
	geprüft	29.01.97	Kub			
	normgepr.					
Arbeitspause Nr.	F/SWB-03-01					

Diese Zeichnung ist unser Eigentum. Vervielfältigung unbefugte Verwertung, Mitteilung an andere ist strafbar und Schadensersatzpflichtig

Reliability test

ITEM	METHOD OF TEST	STANDARD
Storage in high temp.	Storage in + 80 °C test box for 96 hours, then expose to the room temperature for 2 hours without applying power.	All specifications must be satisfied in this condition. <small>Page/Blatt 1 von 2</small>
Storage in low temp.	Storage in – 30 °C test box for 96 hours, then expose to the room temperature for 2 hours without applying power.	All specifications must be satisfied in this condition.
Life test in the room temp.	Operate continuously for 96 hours with applying rated voltage.	All specifications must be satisfied in this condition.
Life test in high temp.	Operate continuously in + 80 °C for 96 hours applying 4 V.	All specifications must be satisfied in this condition.
Life test in low temp.	Operate continuously in – 30 °C for 96 hours applying 2 V.	All specifications must be satisfied in this condition.
Temperature cycle test	<p>Make this test for 5 cycles without applying power, the expose to the room temperature for 2 hours.</p>	All specifications must be satisfied in this condition.
Humidity cycle test	<p>Make this test for 5 cycles without applying power, the expose to the room temperature for 2 hours.</p>	All specifications must be satisfied in this condition.
Vibration test	<p>Make this test for the directions of X,Y and Z for 2 hours each (total 6 hours). To-and for sweep 1 minute.</p>	All specifications must be satisfied in this condition.
Drop test	Drop a buzzer naturally from the height of 700mm to the surface of 10mm thick wooden board. Three directions (x, y & z).	All specifications must be satisfied in this condition.
Solderability test	Soldering Temperature: 230 °C Heat applying time: 3 sec.	

DIGISOUND	Halbzeug, Werkstoff				Untolerierte Maße	Zeichn.-Nr. 951101.3B		
					Maßstab	Ersatz f. Zeichn.		
Vervielfält.-Pause Nr.	Tag	Name	And. zust.	And.-Mittlg. Nr.	Tag	Name		
Arbeitspause Nr.	gezeichnet	bearbeitet	geprüft	normgepr.	1	Version -01	19.11.2007	GS
					F/SWB-03-01			