



Magnetic Transducer

Abmessungen / Dimensions


Draufsicht / Top View



Seitenansicht / Side View

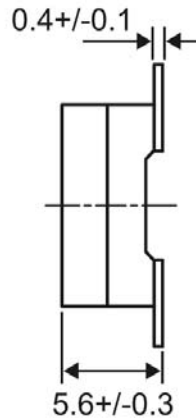

Untenansicht / Bottomview

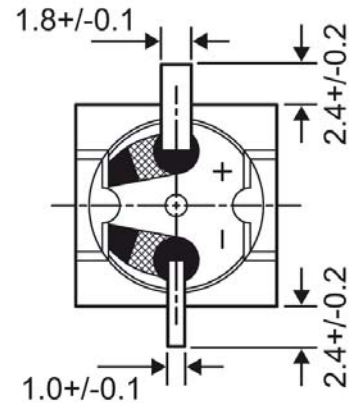

Abmessungen in mm / all dimensions are in mm

Technische Daten

Model Nr.		NMT-1201C
Betriebsspannung	[VDC]	1 ~ 2
Nennspannung	[VDC]	1.5
*Max. Stromstärke	[mA]	30
Spulenwiderstand	[ohm]	15 +/-7.5
# Coil Impedance	[ohm]	40
*Min. Lautstärke	[dBA / 10cm]	70
* Frequenz	[Hz]	2048
Betriebstemperatur	[°C]	-40 ~ +70
Terminal		SMD
Material		PPS
Farbe		Schwarz
Gewicht	[g]	2

*bei Nennspannung [Resonanzfrequenz, 1/2 duty , Rechteckspannung]
und empfohlener Beschaltung [HFE >200, min. 2.5 mA]

Electrical Specifications

Model No.		NMT-1201C
Operating Voltage	[VDC]	1 ~ 2
Rated Voltage	[VDC]	1.5
*Max. Rated Current	[mA]	30
Coil Resistance	[ohm]	15 +/-7.5
# Coil Impedance	[ohm]	40
*Min. Sound Output	[dBA/10cm]	70
* Frequency	[Hz]	2048
Operating Temperature	[°C]	-40~ +70
Terminal		SMD
Housing Material		PPS
Color		Black
Weight	[g]	2

*Value applying at rated voltage [resonant frequency, 1/2 duty, square wave] and recommended circuit [HFE >200, min.2.5mA]

#Value applying [resonant frequency, sine wave, measuring current 60uA]