



Wireless Temperature Sensor

Long-range sensor for on-metal applications



RFM3240

APPLICATIONS

Switchgear monitoring
Electric busbar monitoring
Factory power mains
Data center power

KEY FEATURES

Normal temperature range
-40 °C to +85 °C

High-temperature alarm
up to +125 °C

Powered by Magnus® S3

Sensor size
50 x 52.5 x 3.55 mm

Battery-free design

Long read range: 19 m

Battery-free equipment monitoring

The RFM3240 is a wireless battery-free temperature sensor. This rugged sensor monitors electric distribution and switching equipment temperatures. Applications include utility-grade electric power distribution, factory and industrial electric service switchgear and other applications where metal surfaces are common.

Wireless temperature sensing

The RFM3240 has a normal operating temperature range of -40 °C to +85 °C. This covers the typical operating temperatures of most equipment over a range of environmental operating conditions. The RFM3240 reports temperatures beyond its normal operating range to as high as +125 °C, although prolonged operation at such an elevated temperature is not recommended.

Rugged design for use on metal and equipment

The RFM3240 incorporates a rugged antenna design for harsh environments subject to temperature extremes. The integrated RF antenna harvests energy for the temperature sensing function, as well as communicates with a RAIN/UHF compliant reader. The integrated antenna is suitable for use on metal surfaces.

Compliance




The RFM3240 is available in FCC and ETSI/EU frequency ranges. The RFM3240 requires a RAIN/UHF compliant reader. These sensors can be purchased separately or as part of a system.



RFM3240 Performance Data

Long-range temperature sensor for on-metal and industrial applications

PARAMETER	VALUE
Normal temperature range	-40 °C to +85 °C
High-temperature alarm	Up to +125 °C
Compatible standards	EPC class 1 gen 2 v2.0.1 ISO 18000-6C
Integrated circuit	Powered by Magnus® S3
TID memory	64-bits
EPC memory	160-bits supporting up to 128-bit EPC
EPC programming code	Pre-programmed with a 4-character ASCII code
User memory	128-bits
Sensor Size	50 x 52.5 x 3.55 mm (FCC) 50 x 55.5 x 3.55 mm (ETSI/EU)
Mounting	Self-stick adhesive with easy-release backing
Shipment method	Singulated in plastic bag
Minimum order quantity	10 pc MOQ
Ordering information	RFM3240-AFS (FCC 902 to 928 MHz) RFM3240-AES (ETSI/EU 865.6 MHz to 867.6MHz)

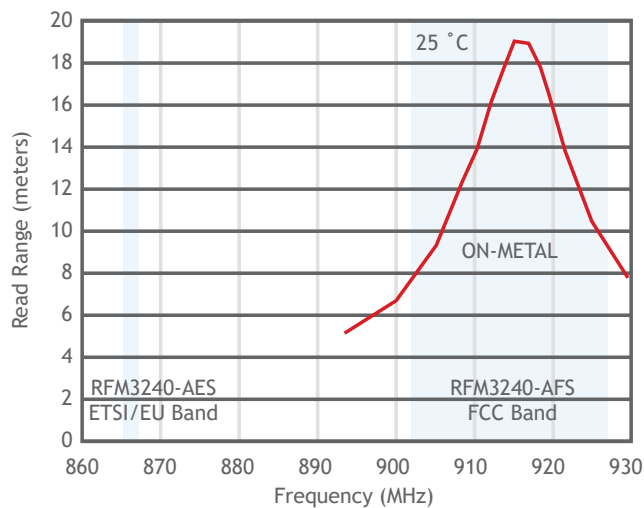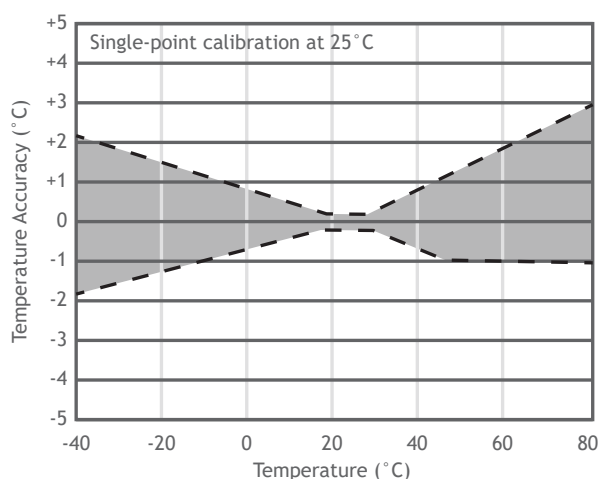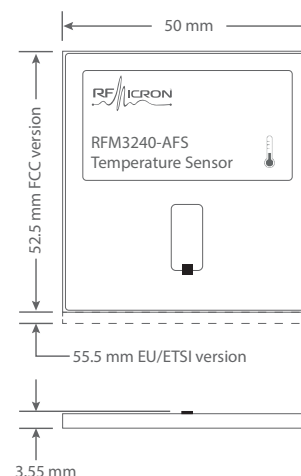

©2017 RFMicron, Inc. All rights reserved. Reproduction in part or in whole is prohibited without prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. RFMicron, and RFMicron, Inc. as well as the product and service names mentioned herein are the registered trademarks of RFMicron, Inc. All other trademarks are the property of their respective owners. RFMicron, Austin Texas, USA.