



# SPECIFICATION


Product : SZ8-Y19-WX-CX-00A000

Seoul Semiconductor			Customer
Drawn by	Checked by	Approved by	Approved by
Jaden	Baron	Lee, SangPil	
25.09.15	25.09.15	25.09.15	

New Generation of WICOP

**SZ8-Y19-WX-CX-00A000**

**High-Power LED - WICOP Y19**



## Product Brief

### Description

- The WICOP series is designed for high flux output applications with high current operation capability.
- Compact footprint(1.81x1.81mm) enables system level cost saving
- It incorporates state of the art SMD design and low thermal resistant material.
- The WICOP is ideal light sources for directional lighting applications such as Spot Lights, various outdoor applications, automotive lightings and high performance torches .

### Features and Benefits

- Designed for high current operation
- Low Thermal Resistance
- A wide CCT range of 2,600~7,000K
- Elip compliant Binning
- RoHS compliant
- Phosphor film directly attached to chip surface

### Key Applications

- Residential - Replacement lamps
- Commercial/Industrial – Retail Display
- Outdoor area - Flood/Street light, High Bay

**Table 1-1. Product selection table SZ8-Y19-WX-Cx-00A000**

Product Name	SSC internal code	Order code	CRI	Flux bin	CCT	Step	VF bin
SZ8-Y19-W0-C7	00A000	0W5653S000	70	0W5	65:6500K	3S: 3step	000
		0W5573S000		0W5	57:5700K		000
		0W5503S000		0W5	50:5000K		000
SZ8-Y19-WN-C7		0W5403S000	0W5	40:4000K	000		
SZ8-Y19-WW-C7		0W4353S000	0W4	35:3500K	000		
		0W4303S000	0W4	30:3000K	000		
		0W3273S000	0W3	27:2700K	000		
SZ8-Y19-W0-C8		0W2653S000	0W2	65:6500K	000		
		0W3573S000	0W3	57:5700K	000		
		0W3503S000	0W3	50:5000K	000		
SZ8-Y19-WN-C8		0W3403S000	80	0W3	40:4000K	3S: 3step	000
SZ8-Y19-WW-C8		0W2353S000	0W2	35:3500K	000		
		0W2303S000	0W2	30:3000K	000		
		0W1273S000	0W1	27:2700K	000		
SZ8-Y19-W0-C9		0W1653S000	0W1	65:6500K	000		
		0W1573S000	0W1	57:5700K	000		
		0W1503S000	0W1	50:5000K	000		
SZ8-Y19-WN-C9		0V3403S000	90	0V3	40:4000K	3S: 3step	000
SZ8-Y19-WW-C9		0V2353S000	0V2	35:3500K	000		
		0V1303S000	0V1	30:3000K	000		
		0V1273S000	0V1	27:2700K	000		

**Table 1-2. Product selection table SZ8-Y19-WX-Cx-00A000**

Product Name	SSC internal code	Order code	CRI	Flux bin	CCT	Step	VF bin
SZ8-Y19-W0-C7	00A000	0W5655S000	70	0W5	65:6500K	5S: 5step	000
		0W5575S000		0W5	57:5700K		000
		0W5505S000		0W5	50:5000K		000
SZ8-Y19-WN-C7		0W5405S000	0W5	40:4000K	000		
SZ8-Y19-WW-C7		0W4355S000	0W4	35:3500K	000		
		0W4305S000	0W4	30:3000K	000		
		0W3275S000	0W3	27:2700K	000		
SZ8-Y19-W0-C8		0W2655S000	0W2	65:6500K	5S: 5step	000	
		0W3575S000	0W3	57:5700K		000	
		0W3505S000	0W3	50:5000K		000	
SZ8-Y19-WN-C8		0W3405S000	80	0W3	40:4000K	000	
SZ8-Y19-WW-C8		0W2355S000	0W2	35:3500K	000		
		0W2305S000	0W2	30:3000K	000		
		0W1275S000	0W1	27:2700K	000		
SZ8-Y19-W0-C9		0W1655S000	90	0W1	65:6500K	5S: 5step	000
		0W1575S000		0W1	57:5700K		000
		0W1505S000		0W1	50:5000K		000
SZ8-Y19-WN-C9		0V3405S000	0V3	40:4000K	000		
SZ8-Y19-WW-C9		0V2355S000	0V2	35:3500K	000		
		0V1305S000	0V1	30:3000K	000		
		0V1275S000	0V1	27:2700K	000		

**Table 1-3. Product selection table SZ8-Y19-WX-Cx-00A000**

Product Name	SSC internal code	Order code	CRI	Flux bin	CCT	Step	VF bin
SZ8-Y19-W0-C7	00A000	0W5654M000	70	0W5	65:6500K	4M: 4step Mixing	000
		0W5574M000		0W5	57:5700K		000
		0W5504M000		0W5	50:5000K		000
SZ8-Y19-WN-C7		0W5404M000	0W5	40:4000K	000		
SZ8-Y19-WW-C7		0W4354M000	0W4	35:3500K	000		
		0W4304M000	0W4	30:3000K	000		
		0W3274M000	0W3	27:2700K	000		
SZ8-Y19-W0-C8		0W2654M000	0W2	65:6500K	000		
		0W3574M000	0W3	57:5700K	000		
		0W3504M000	0W3	50:5000K	000		
SZ8-Y19-WN-C8		0W3404M000	80	0W3	40:4000K	4M: 4step Mixing	000
SZ8-Y19-WW-C8		0W2354M000	0W2	35:3500K	000		
		0W2304M000	0W2	30:3000K	000		
		0W1274M000	0W1	27:2700K	000		
SZ8-Y19-W0-C9		0W1654M000	90	0W1	65:6500K	4M: 4step Mixing	000
		0W1574M000		0W1	57:5700K		000
		0W1504M000		0W1	50:5000K		000
SZ8-Y19-WN-C9		0V3404M000	0V3	40:4000K	000		
SZ8-Y19-WW-C9		0V2354M000	0V2	35:3500K	000		
		0V1304M000	0V1	30:3000K	000		
		0V1274M000	0V1	27:2700K	000		

**Table 1-4. Product selection table SZ8-Y19-WX-Cx-00A000**

Product Name	SSC internal code	Order code	CRI	Flux bin	CCT	Step	VF bin
SZ8-Y19-W0-C7	00A000	0W5655M000	70	0W5	65:6500K	5M: 5step Mixing	000
		0W5575M000		0W5	57:5700K		000
		0W5505M000		0W5	50:5000K		000
SZ8-Y19-WN-C7		0W5405M000	0W5	40:4000K	000		
SZ8-Y19-WW-C7		0W4355M000	0W4	35:3500K	000		
		0W4305M000	0W4	30:3000K	000		
		0W3275M000	0W3	27:2700K	000		
SZ8-Y19-W0-C8		0W2655M000	0W2	65:6500K	000		
		0W3575M000	0W3	57:5700K	000		
		0W3505M000	0W3	50:5000K	000		
SZ8-Y19-WN-C8		0W3405M000	80	0W3	40:4000K	5M: 5step Mixing	000
SZ8-Y19-WW-C8		0W2355M000	0W2	35:3500K	000		
		0W2305M000	0W2	30:3000K	000		
		0W1275M000	0W1	27:2700K	000		
SZ8-Y19-W0-C9		0W1655M000	90	0W1	65:6500K	5M: 5step Mixing	000
		0W1575M000		0W1	57:5700K		000
		0W1505M000		0W1	50:5000K		000
SZ8-Y19-WN-C9		0V3405M000	0V3	40:4000K	000		
SZ8-Y19-WW-C9		0V2355M000	0V2	35:3500K	000		
		0V1305M000	0V1	30:3000K	000		
		0V1275M000	0V1	27:2700K	000		

# Table of Contents

Index		
•	Product Cover	1
•	Product Brief	2
•	Table of Contents	5
•	Performance Characteristics	6
•	Characteristics Graph	8
•	Color bin structure	13
•	Mixing order kiting combination	23
•	Product Nomenclature	24
•	Mechanical Dimensions	25
•	Material Structure	26
•	Reflow Soldering Characteristics	27
•	Emitter Tape & Reel Packaging	28
•	Packaging Information	29
•	Handling of Silicone Resin for LED	30
•	Precaution For Use	31
•	Company Information	35

## Color Bin Structure

**Table 2. Electro Optical Characteristics,  $I_F=700\text{mA}$ ,  $T_J=85^\circ\text{C}$  (3V)**

Min. CRI, $R_a$ <sup>[4]</sup>	Nominal CCT [K] <sup>[1]</sup>	Min. Flux [lm]	Typ. Luminous Flux $\Phi_v$ <sup>[3]</sup> [lm]	Typ. Luminous Efficacy [lm/W]
70	6500	299	305	152.3
	5700	299	321	160.3
	5000	299	320	159.8
	4000	299	320	159.8
	3500	285	305	152.3
	3000	285	295	147.4
	2700	271	291	145.4
80	6500	254	272	135.9
	5700	271	291	145.4
	5000	271	291	145.4
	4000	271	290	144.9
	3500	254	272	135.9
	3000	254	272	135.9
	2700	237	254	126.9
90	6500	237	254	126.9
	5700	237	254	126.9
	5000	237	254	126.9
	4000	223	254	126.9
	3500	208	223	111.4
	3000	195	209	104.4
	2700	195	209	104.4

**Notes :**

(1) Correlated Color Temperature is derived from the CIE 1931 Chromaticity diagram.

Color coordinate :  $\pm 0.005$ , CCT  $\pm 5\%$  tolerance.

(2) Seoul Semiconductor maintains a tolerance of  $\pm 7\%$  on flux and power measurements.

(3)  $\Phi_v$  is the total luminous flux output as measured with an integrating sphere.

(4) Tolerance is  $\pm 2.0$  on CRI measurements.

## Color Bin Structure

**Table 3. Absolute Maximum Ratings**

Parameter	Symbol	Value			Unit
		Min.	Typ.	Max. <sup>[4]</sup>	
Forward Current <sup>[1]</sup>	$I_F$	-	0.7	1.5 <sup>[3]</sup>	A
Power Dissipation	$P_D$	-	-	7.8	W
Junction Temperature	$T_j$	-	-	145	°C
Storage Temperature	$T_{stg}$	- 40	-	125	°C
Viewing angle	$\theta$	140			degree
Forward voltage (700mA, 85°C)	$V_F$	2.86      3.25			V
Thermal resistance (J to S) <sup>[2]</sup>	$R\theta_{J-S}$	-	4.5 <sup>[3]</sup>	-	K/W
ESD Sensitivity(HBM)	Class 2 JEDEC JS-001-2017				


**Notes :**

- (1) At Junction Temperature 85°C condition.
- (2)  $R\theta_{J-S}$  is tested at typical forward current.
- (3) Using Metal PCB (Normal type).
- (4) It is recommended to use it in the condition that the reliability is secured within the Max value.

- Thermal resistance can be increased substantially depending on the heat sink design/operating condition, and the maximum possible driving current will decrease accordingly.


## Characteristics Graph

### Color Spectrum

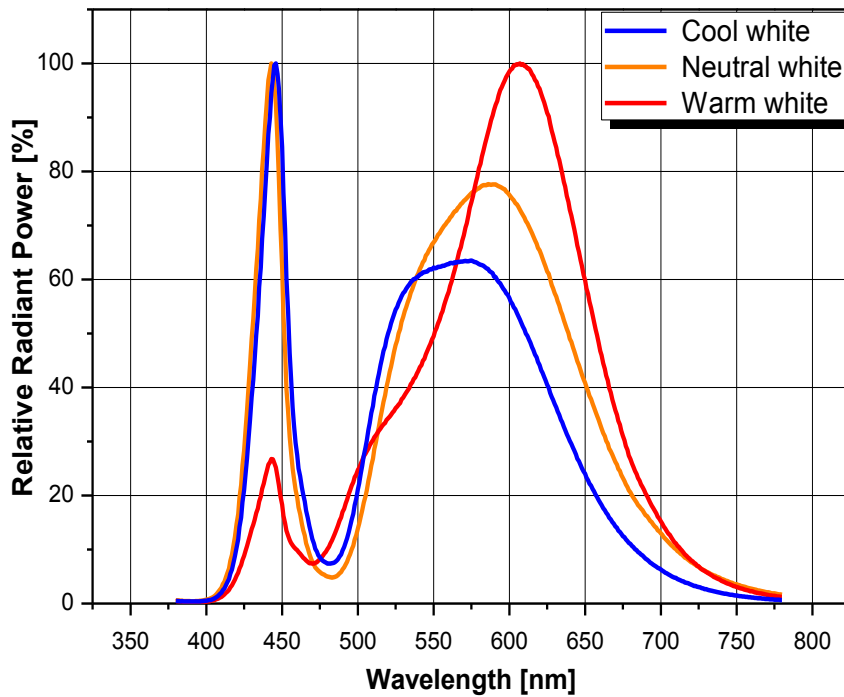

(Fig 1)

### Typical Spatial Distribution

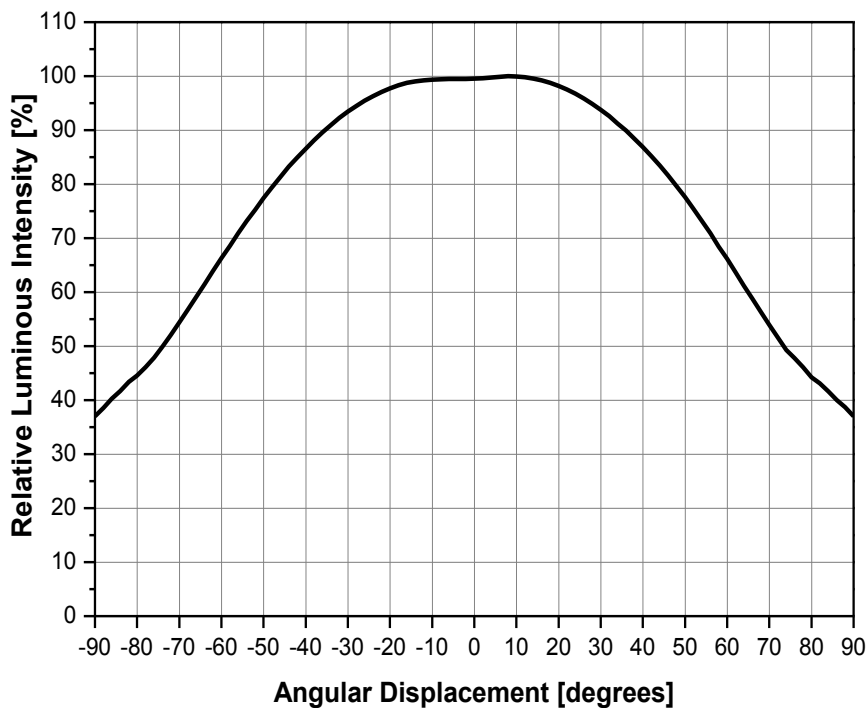


(Fig 2)




## Characteristics Graph

Forward Voltage vs. Forward Current,  $T_j=85^{\circ}\text{C}$

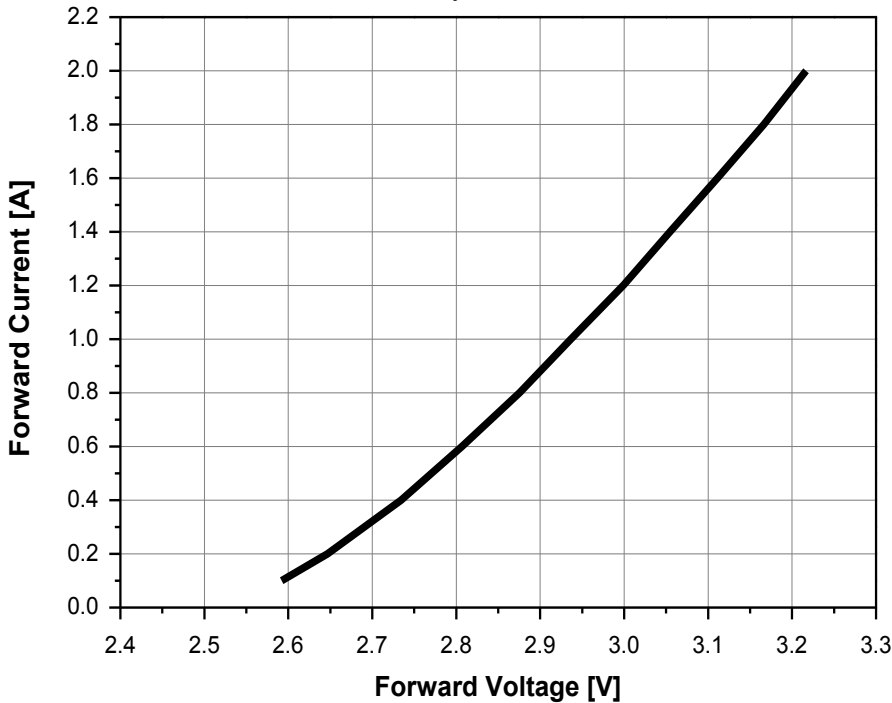

(Fig 3)

Forward Current vs. Relative Luminous Flux,  $T_j=85^{\circ}\text{C}$

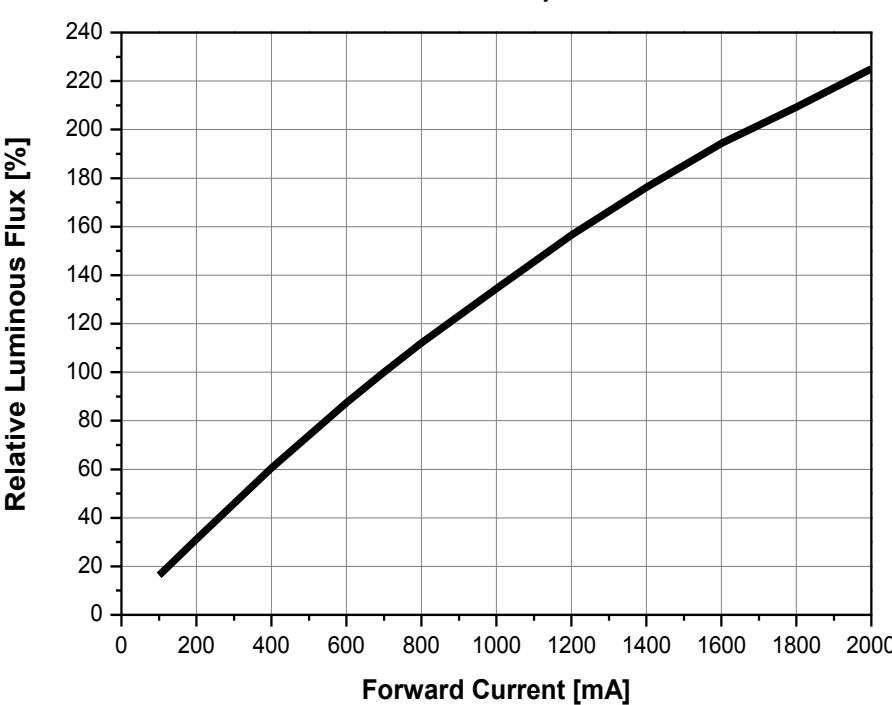


(Fig 4)

- Using less than 100mA is not recommended


## Characteristics Graph

**Forward Current vs. CIE X, Y Shift,  $T_j=85^\circ\text{C}$**

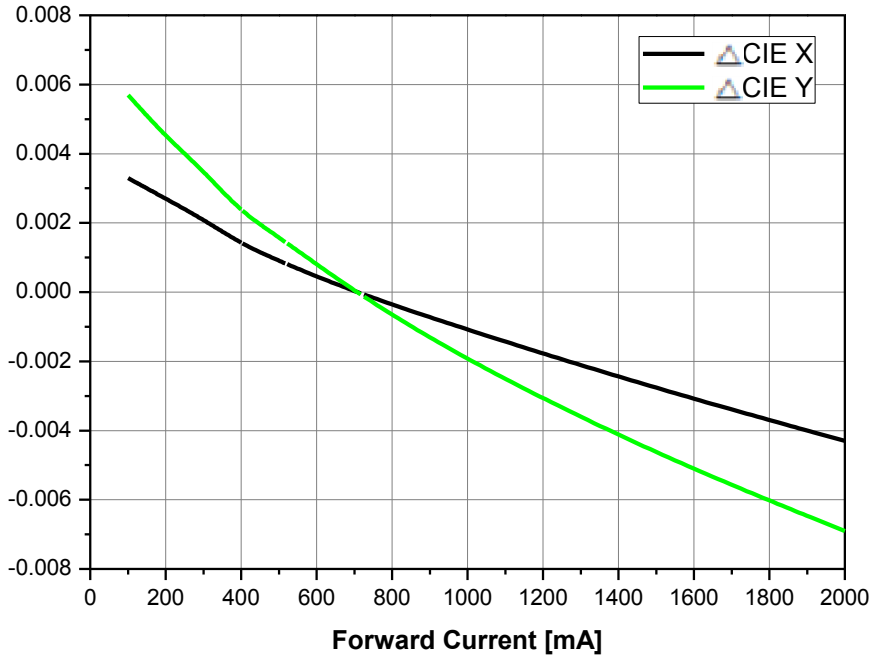

(Fig 5)


**Junction Temp. vs. CIE X, Y Shift,  $I_F=700\text{mA}$**

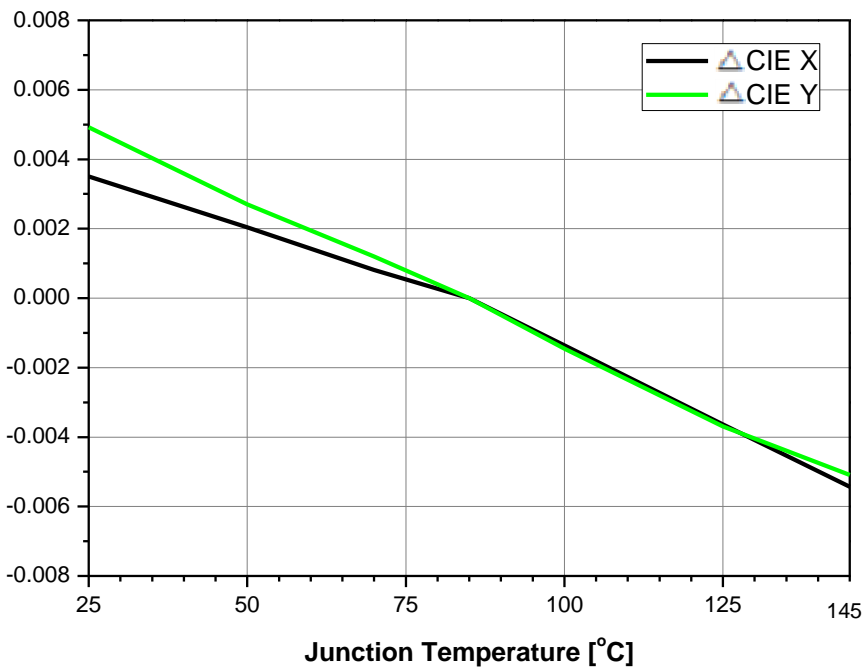


(Fig 6)

## Characteristics Graph

**Relative Light Output vs. Junction Temperature,  $I_F=700\text{mA}$**

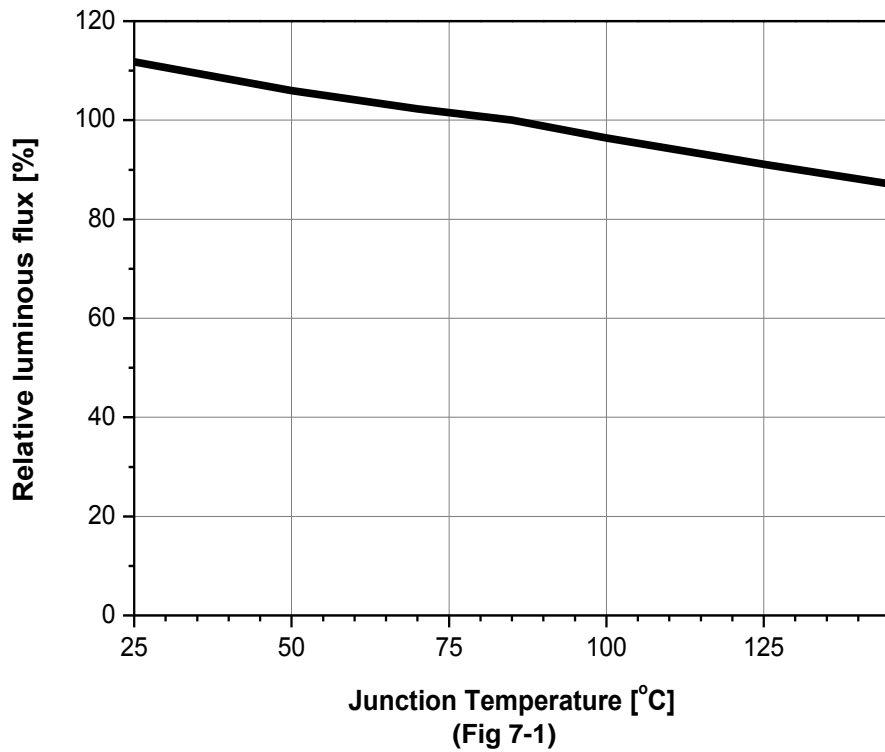


**Relative Forward Voltage vs. Junction Temperature,  $I_F=700\text{mA}$**

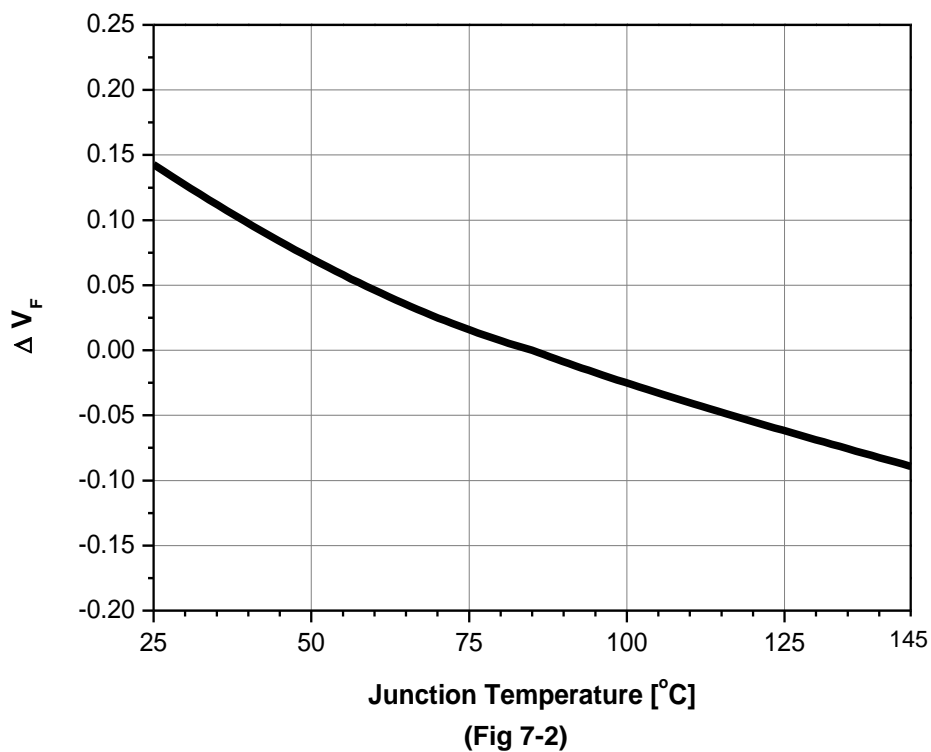

# Characteristics Graph

Maximum Forward Current vs. Ambient Temperature,  $T_j(max.)=145^{\circ}C$

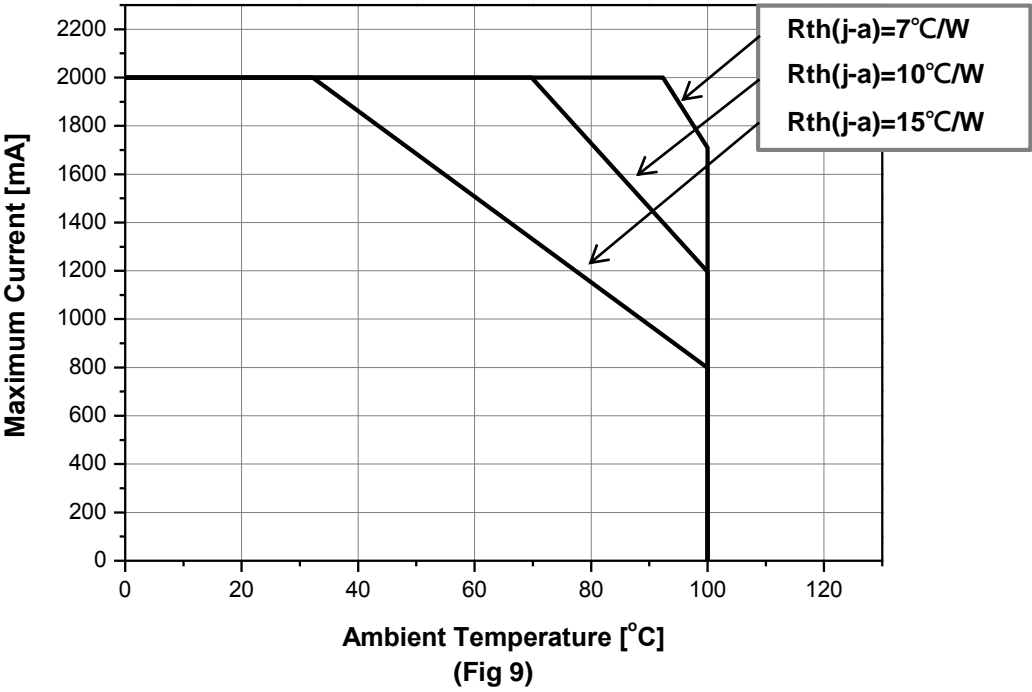

## Color Bin Structure

**Table 4. Bin Code description,  $I_F=700\text{mA}$ ,  $T_J=85^\circ\text{C}$  (3V)**

Part Number	Luminous Flux [lm]			Color Chromaticity Coordinate	Typical Forward Voltage [ $V_F$ ] <sup>[1]</sup>		
	Bin Code	Min.	Max.		Bin Code	Min.	Max.
SZ8-Y19-WX-Cx-00A000	V1	195	208	Refer to page. 17~26	G	2.75	3.00
	V2	208	223				
	V3	223	237				
	W1	237	254				
	W2	254	271				
	W3	271	285		H	3.00	3.25
	W4	285	299				
	W5	299	313				
	W6	313	327				
	W7	327	342				

**Table 5. Luminous Flux rank distribution**
 Available Rank


CRI	CCT	CIE	Luminous Flux Rank									
70	6,000 ~ 7,000K	A	V1	V2	V3	W1	W2	W3	W4	W5	W6	W7
	5,300 ~ 6,000K	B	V1	V2	V3	W1	W2	W3	W4	W5	W6	W7
	4,700 ~ 5,300K	C	V1	V2	V3	W1	W2	W3	W4	W5	W6	W7
	3,700 ~ 4,200K	E	V1	V2	V3	W1	W2	W3	W4	W5	W6	W7
	3,200 ~ 3,700K	F	V1	V2	V3	W1	W2	W3	W4	W5	W6	W7
	2,900 ~ 3,200K	G	V1	V2	V3	W1	W2	W3	W4	W5	W6	W7
	2,600 ~ 2,900K	H	V1	V2	V3	W1	W2	W3	W4	W5	W6	W7
80	6,000 ~ 7,000K	A	V1	V2	V3	W1	W2	W3	W4	W5	W6	W7
	5,300 ~ 6,000K	B	V1	V2	V3	W1	W2	W3	W4	W5	W6	W7
	4,700 ~ 5,300K	C	V1	V2	V3	W1	W2	W3	W4	W5	W6	W7
	3,700 ~ 4,200K	E	V1	V2	V3	W1	W2	W3	W4	W5	W6	W7
	3,200 ~ 3,700K	F	V1	V2	V3	W1	W2	W3	W4	W5	W6	W7
	2,900 ~ 3,200K	G	V1	V2	V3	W1	W2	W3	W4	W5	W6	W7
	2,600 ~ 2,900K	H	V1	V2	V3	W1	W2	W3	W4	W5	W6	W7
90	6,000 ~ 7,000K	A	V1	V2	V3	W1	W2	W3	W4	W5	W6	W7
	5,300 ~ 6,000K	B	V1	V2	V3	W1	W2	W3	W4	W5	W6	W7
	4,700 ~ 5,300K	C	V1	V2	V3	W1	W2	W3	W4	W5	W6	W7
	3,700 ~ 4,200K	E	V1	V2	V3	W1	W2	W3	W4	W5	W6	W7
	3,200 ~ 3,700K	F	V1	V2	V3	W1	W2	W3	W4	W5	W6	W7
	2,900 ~ 3,200K	G	V1	V2	V3	W1	W2	W3	W4	W5	W6	W7
	2,600 ~ 2,900K	H	V1	V2	V3	W1	W2	W3	W4	W5	W6	W7

**Notes :**

- (1) Tolerance is  $\pm 0.06\text{V}$  on forward voltage measurements.
- (2) All measurements were made under the standardized environment of Seoul Semiconductor  
In order to ensure availability, single color rank will not be orderable.

## Color Bin Structure

CIE Chromaticity Diagram,  $T_j=85^{\circ}\text{C}$ ,  $I_F=700\text{mA}$

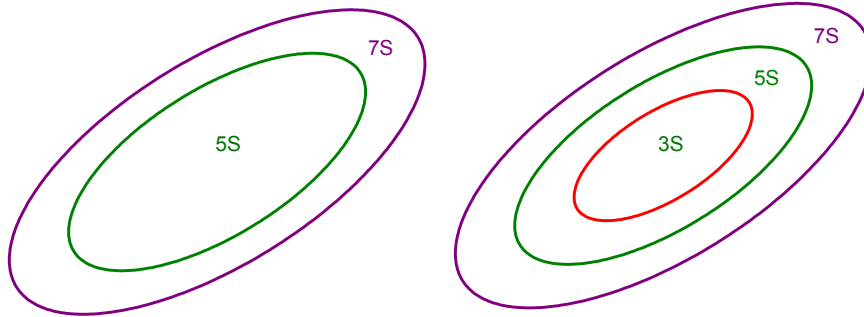

Order	Box Packing Method
xx5S	5S(5Step) Single


Order	Box Packing Method
xx3S	3S(3Step) Single
xx4M	3S(3Step) & 5S (5Step) Mixing
xx5M	3S(3Step) & 7S (7Step) Mixing

### \*Notes :

1. xx3S Order will ship 3S only
2. xx4M Order will ship 3S & 5S (=also include 3S)
3. xx5S Order will ship 5S(=also include 3S)
4. xx5M Order will ship 3S & 7S (=also include 5S, 3S)
5. Doughnut Bin will not ship alone(=Will ship with mixing bin)
  - 'xx' can be 65=6500K, 56=5600K, 50=5000K, 40=4000K, 35= 3500K, 30=3000K, 27= 2700K

## Color Bin Structure



CIE Chromaticity Diagram,  $T_j=85^{\circ}\text{C}$ ,  $I_F=700\text{mA}$

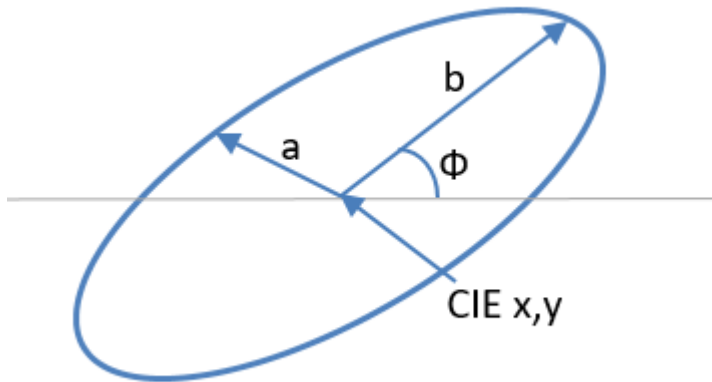

Macadam	CCT	Center Point		Major Axis	Minor Axis	Rotation Angle
	(K)	CIE x	CIE y	a	b	$\phi$
3 step	2700	0.4578	0.4101	0.0081	0.0042	54
	3000	0.4338	0.4030	0.0083	0.0040	53
	3500	0.4073	0.3917	0.0093	0.0042	54
	4000	0.3818	0.3797	0.0094	0.0040	54
	5000	0.3447	0.3553	0.0082	0.0035	60
	5700	0.3287	0.3417	0.0076	0.0033	59
	6500	0.3123	0.3282	0.0067	0.0029	59
5 step	2700	0.4578	0.4101	0.0135	0.0070	54
	3000	0.4338	0.4030	0.0140	0.0068	53
	3500	0.4073	0.3917	0.0155	0.0069	54
	4000	0.3818	0.3797	0.0156	0.0068	54
	5000	0.3447	0.3553	0.0137	0.0058	60
	5700	0.3287	0.3417	0.0125	0.0053	59
	6500	0.3123	0.3282	0.0112	0.0048	59
7 step	2700	0.4578	0.4101	0.0189	0.0098	54
	3000	0.4338	0.4030	0.0196	0.0095	53
	3500	0.4073	0.3917	0.0217	0.0097	54
	4000	0.3818	0.3797	0.0218	0.0095	54
	5000	0.3447	0.3553	0.0192	0.0081	60
	5700	0.3287	0.3417	0.0175	0.0074	59
	6500	0.3123	0.3282	0.0157	0.0067	59

## Color Bin Structure

CIE Chromaticity Diagram,  $T_j=85^{\circ}\text{C}$ ,  $I_F=700\text{mA}$ ,  $\text{CCT}=6500\text{K}$

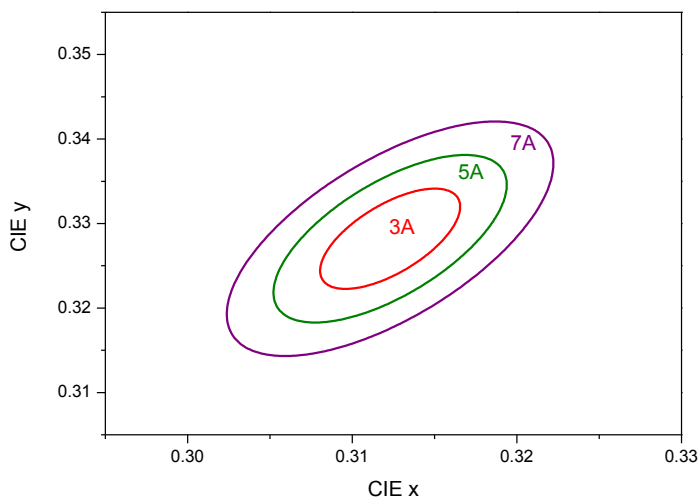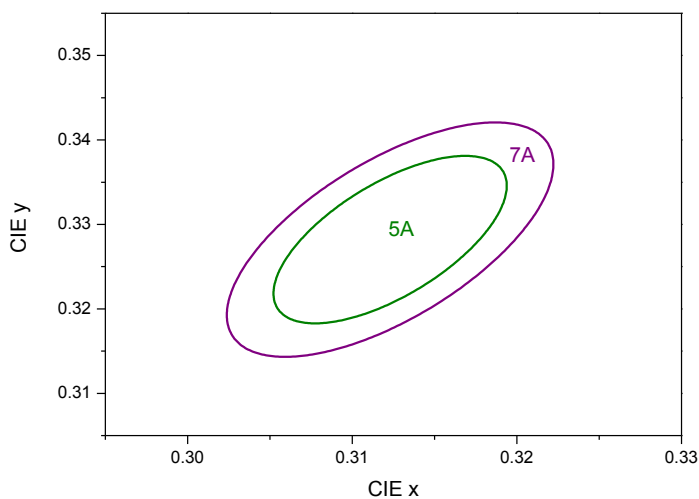



3A(3.0Step)		5A (5.0Step)	
Center point	0.3123 : 0.3282	Center point	0.3123 : 0.3282
Major Axis a	0.0067	Major Axis a	0.0112
Minor Axis b	0.0029	Minor Axis b	0.0048
Ellipse Rotation Angle	59	Ellipse Rotation Angle	59

7A(7.0Step)	
Center point	0.3123 : 0.3282
Major Axis a	0.0157
Minor Axis b	0.0067
Ellipse Rotation Angle	59



## Color Bin Structure

CIE Chromaticity Diagram,  $T_j=85^{\circ}\text{C}$ ,  $I_F=700\text{mA}$ ,  $\text{CCT}=5700\text{K}$

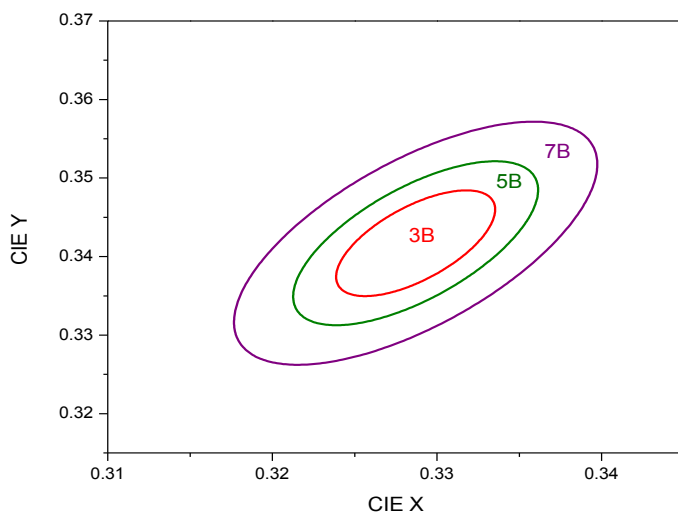
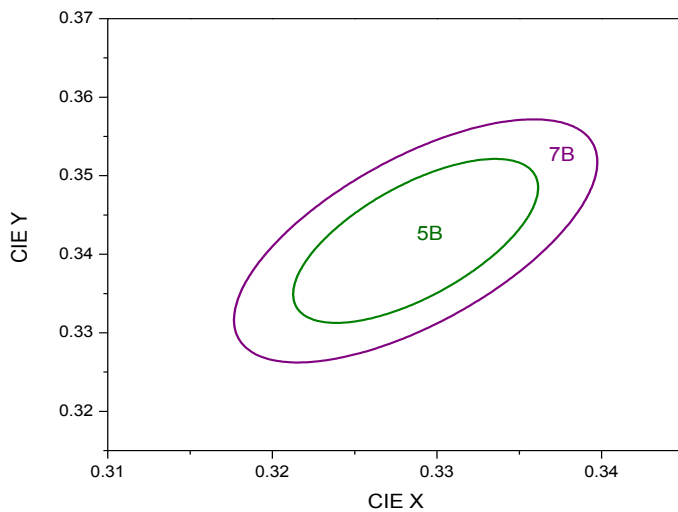


3B(3.0Step)		5B (5.0Step)	
Center point	0.3287 : 0.3417	Center point	0.3287 : 0.3417
Major Axis a	0.0076	Major Axis a	0.0125
Minor Axis b	0.0033	Minor Axis b	0.0053
Ellipse Rotation Angle	59	Ellipse Rotation Angle	59

7B(7.0Step)	
Center point	0.3287 : 0.3417
Major Axis a	0.0175
Minor Axis b	0.0074
Ellipse Rotation Angle	59

## Color Bin Structure

CIE Chromaticity Diagram,  $T_J=85^{\circ}\text{C}$ ,  $I_F=700\text{mA}$ ,  $\text{CCT}=5000\text{K}$

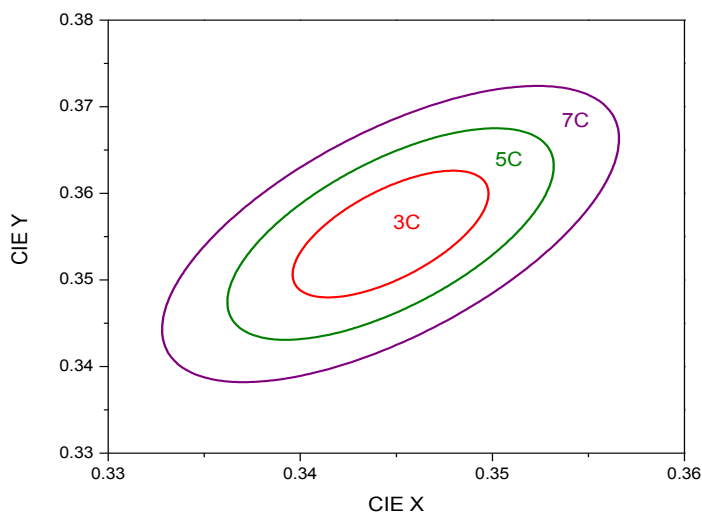
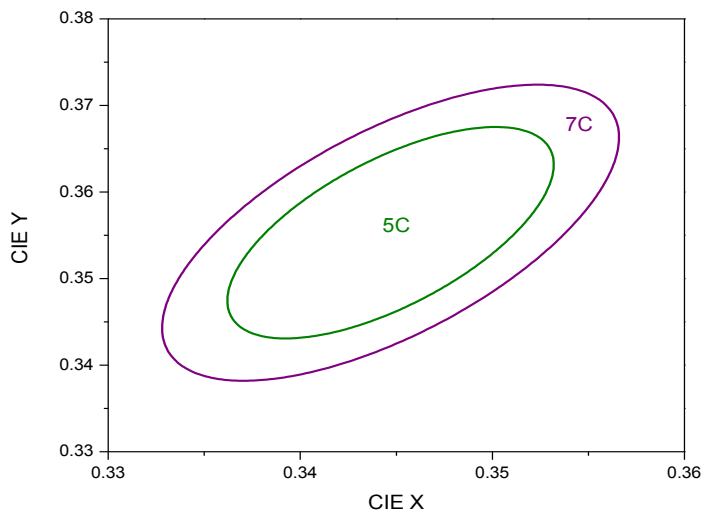


3C(3.0Step)		5C (5.0Step)	
Center point	0.3447 : 0.3553	Center point	0.3447 : 0.3553
Major Axis a	0.0082	Major Axis a	0.0137
Minor Axis b	0.0035	Minor Axis b	0.0058
Ellipse Rotation Angle	60	Ellipse Rotation Angle	60

7C(7.0Step)	
Center point	0.3447 : 0.3553
Major Axis a	0.0192
Minor Axis b	0.0081
Ellipse Rotation Angle	60

## Color Bin Structure

CIE Chromaticity Diagram,  $T_j=85^{\circ}\text{C}$ ,  $I_F=700\text{mA}$ ,  $\text{CCT}=4000\text{K}$

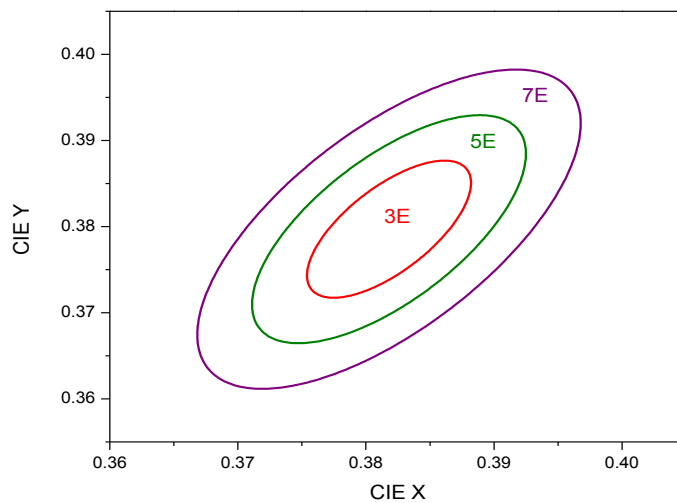
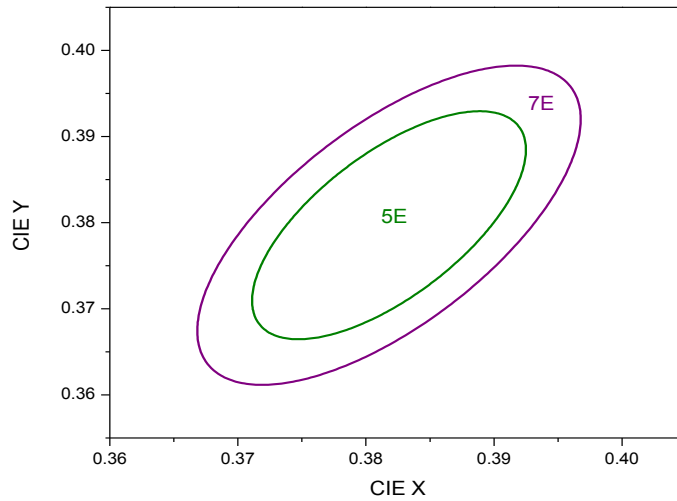


3E(3.0Step)		5E (5.0Step)	
Center point	0.3818 : 0.3797	Center point	0.3818 : 0.3797
Major Axis a	0.0094	Major Axis a	0.0156
Minor Axis b	0.0040	Minor Axis b	0.0068
Ellipse Rotation Angle	54	Ellipse Rotation Angle	54

7E(7.0Step)	
Center point	0.3818 : 0.3797
Major Axis a	0.0218
Minor Axis b	0.0095
Ellipse Rotation Angle	54

# Color Bin Structure

CIE Chromaticity Diagram,  $T_j=85^{\circ}\text{C}$ ,  $I_F=700\text{mA}$ , CCT=3500K

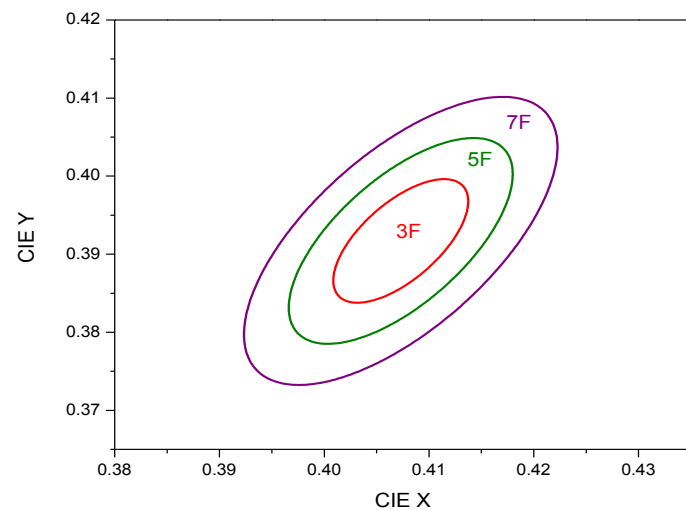
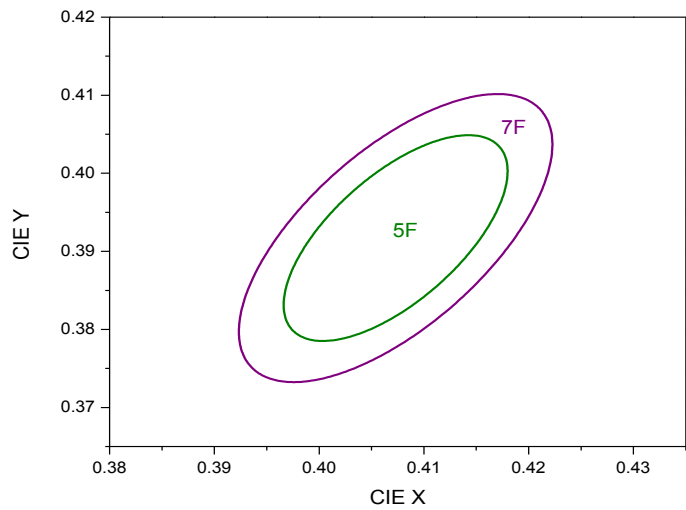


3F(3.0Step)		5F (5.0Step)	
Center point	0.4073 : 0.3917	Center point	0.4073 : 0.3917
Major Axis a	0.0093	Major Axis a	0.0155
Minor Axis b	0.0042	Minor Axis b	0.0069
Ellipse Rotation Angle	54	Ellipse Rotation Angle	54

7F(7.0Step)	
Center point	0.4073 : 0.3917
Major Axis a	0.0217
Minor Axis b	0.0097
Ellipse Rotation Angle	54

## Color Bin Structure

CIE Chromaticity Diagram,  $T_j=85^{\circ}\text{C}$ ,  $I_F=700\text{mA}$ ,  $\text{CCT}=3000\text{K}$

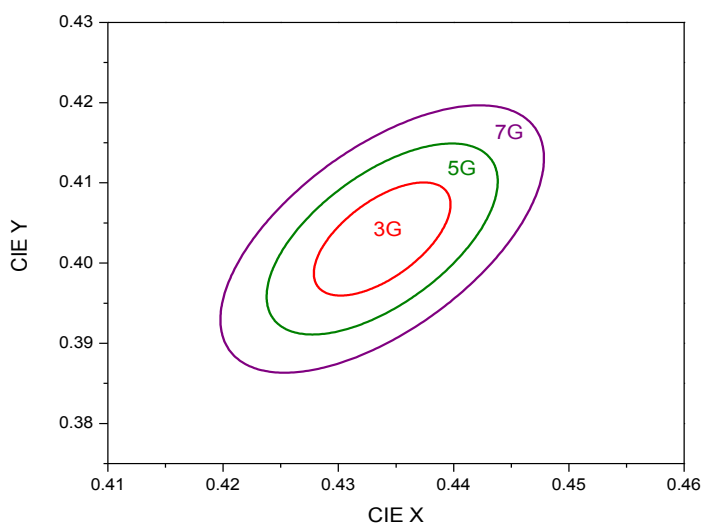
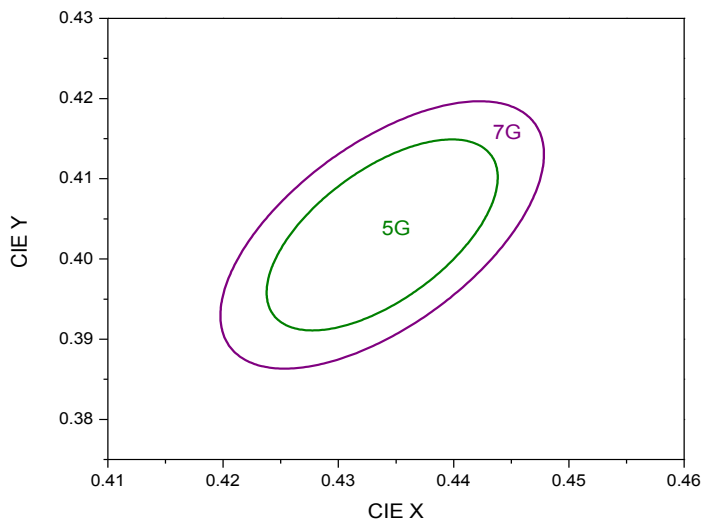


3G (3.0Step)		5G (5.0Step)	
Center point	0.4338 : 0.4030	Center point	0.4338 : 0.4030
Major Axis a	0.0083	Major Axis a	0.0140
Minor Axis b	0.0040	Minor Axis b	0.0068
Ellipse Rotation Angle	53	Ellipse Rotation Angle	53

7G(7.0Step)	
Center point	0.4338 : 0.4030
Major Axis a	0.0196
Minor Axis b	0.0095
Ellipse Rotation Angle	53

## Color Bin Structure

CIE Chromaticity Diagram,  $T_j=85^{\circ}\text{C}$ ,  $I_F=700\text{mA}$ ,  $\text{CCT}=2700\text{K}$

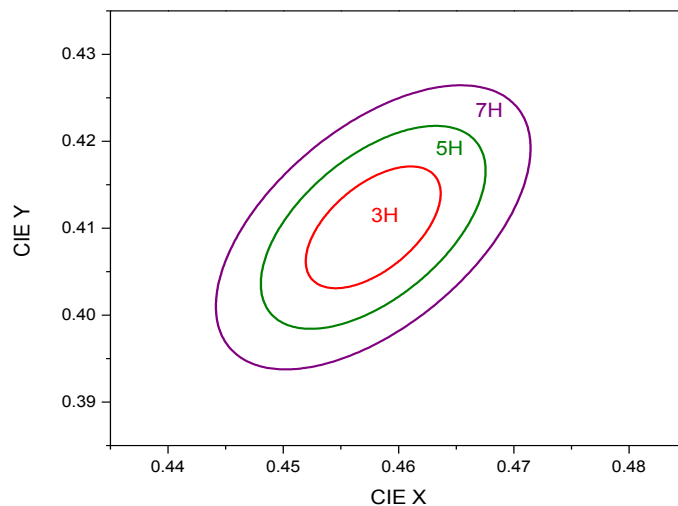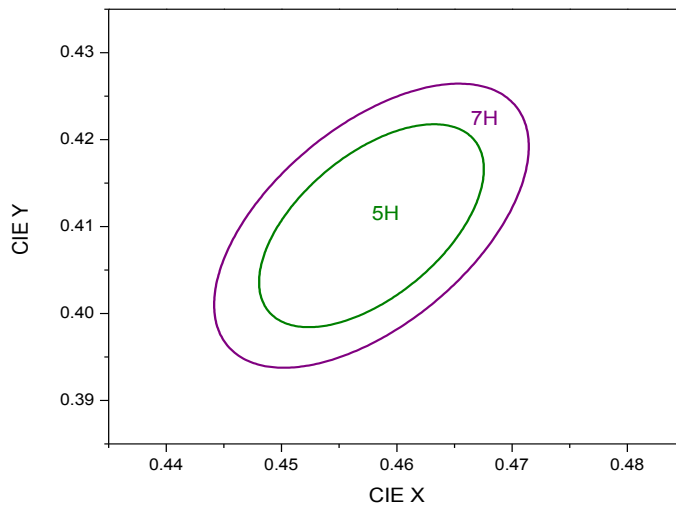

3H (3.0Step)		5H (5.0Step)	
Center point	0.4578 : 0.4101	Center point	0.4578 : 0.4101
Major Axis a	0.0081	Major Axis a	0.0135
Minor Axis b	0.0042	Minor Axis b	0.0070
Ellipse Rotation Angle	54	Ellipse Rotation Angle	54

7H(7.0Step)	
Center point	0.4578 : 0.4101
Major Axis a	0.0189
Minor Axis b	0.0098
Ellipse Rotation Angle	54

## Mixing order kiting combination

### Kiting Combination with xx4M

Part Number	Combination	Reel	FLUX	CIE	VF	Qty
SZ8-Y19-WX-Cx-00A000	Kiting_a	Reel 1	ALL	3S	ALL	1,500pcs
		Reel 2	ALL	3S	ALL	1,500pcs
	Kiting_b	Reel 1	ALL	3S	ALL	1,500pcs
		Reel 2	ALL	5S	ALL	1,500pcs

### Kiting Combination with xx5M

Part Number	Combination	Reel	FLUX	CIE	VF	Qty
SZ8-Y19-WX-Cx-00A000	Kiting_c	Reel 1	ALL	5S	ALL	1,500pcs
		Reel 2	ALL	5S	ALL	1,500pcs
	Kiting_d	Reel 1	ALL	3S	ALL	1,500pcs
		Reel 2	ALL	7S	ALL	1,500pcs

## Product Nomenclature


**Table 6. Nomenclature example**

<b>S</b>	<b>Z</b>	<b>8</b>	<b>-</b>	<b>Y</b>	<b>1</b>	<b>9</b>	<b>-</b>	<b>W</b>	<b>x</b>	<b>-</b>	<b>C</b>	<b>x</b>	<b>-</b>	<b>0</b>	<b>0</b>	<b>A</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>a</b>	<b>b</b>	<b>b</b>	<b>c</b>	<b>c</b>	<b>d</b>	<b>d</b>	<b>e</b>	<b>e</b>	<b>e</b>
X <sub>1</sub>	X <sub>2</sub>	X <sub>3</sub>	X <sub>4</sub>	X <sub>5</sub>	X <sub>6</sub>	X <sub>7</sub>	X <sub>8</sub>	X <sub>9</sub>	X <sub>10</sub>	X <sub>11</sub>	X <sub>12</sub>	X <sub>13</sub>	X <sub>14</sub>	X <sub>15</sub>	X <sub>16</sub>	X <sub>17</sub>	X <sub>18</sub>	X <sub>19</sub>	X <sub>20</sub>	X <sub>21</sub>	X <sub>22</sub>	X <sub>23</sub>	X <sub>24</sub>	X <sub>25</sub>	X <sub>26</sub>	X <sub>27</sub>	X <sub>28</sub>	X <sub>29</sub>	X <sub>30</sub>


Part Number Code	Value	References	Description
<b>X<sub>1</sub></b>	S	Seoul Semiconductor	Company
<b>X<sub>2</sub></b>	Z	Division	Z-POWER
<b>X<sub>3</sub></b>	8		WICOP
<b>X<sub>5</sub></b>	Y		WICOP CHIP
<b>X<sub>6</sub>X<sub>7</sub></b>	19	1810x1810	Package series
<b>X<sub>9</sub>X<sub>10</sub></b>	WX	Color	W0: Cool White / WN: Neutral white/ WW: Warm white
<b>X<sub>12</sub>X<sub>13</sub></b>	Cx	CRI	C7: CRI 70/ C8: CRI 80/ C9: CRI 90
<b>X<sub>4</sub>, X<sub>8</sub>, X<sub>11</sub>, X<sub>14</sub></b>	-		
<b>X<sub>15</sub>~X<sub>20</sub></b>	00A000	internal code	
<b>X<sub>21</sub>X<sub>22</sub>X<sub>23</sub></b>	abb	Flux Bin	abb: 0V1, 0V2, 0V3, 0W1, 0W2, 0W3, 0W4, 0W5, 0W6, 0W7
<b>X<sub>24</sub>X<sub>25</sub></b>	cc	Color Temp.	65=6500K, 57=500K, 50=5000K, 40=4000K, 35= 3500K, 30=3000K, 27= 2700K
<b>X<sub>26</sub>X<sub>27</sub></b>	dd	step	3S: 3Step single / 5S: 5Step single 4M: 4Step Mixing / 5M: 5Step Mixing
<b>X<sub>28</sub>X<sub>29</sub>X<sub>30</sub></b>	eee	VF Bin	000: All bin




## Mechanical Dimensions

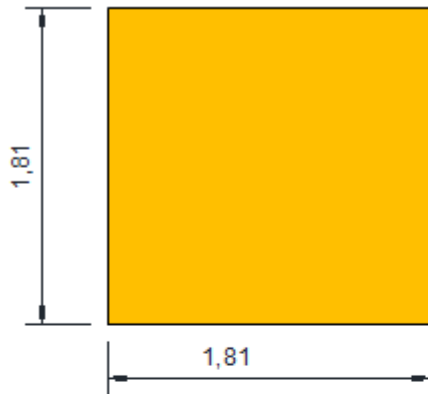


< Top >

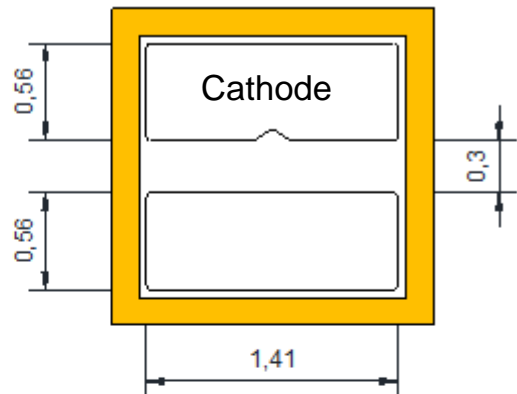


< Bottom >

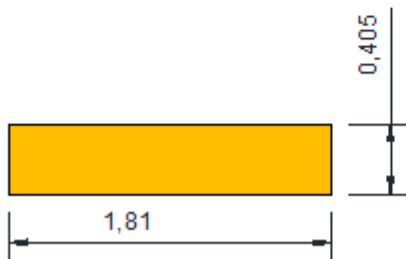

< Side >

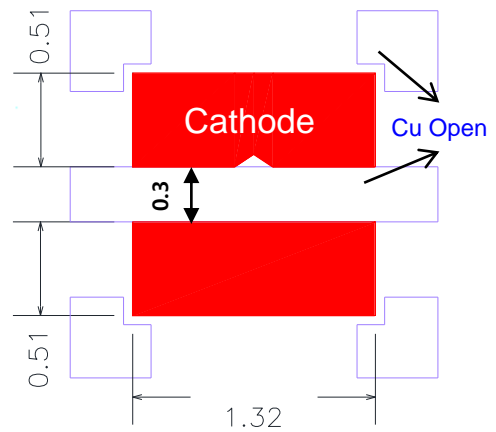


< Recommended Solder Pattern >



< Inner circuit >


- (1) All dimensions are in millimeters.
- (2) Scale : none
- (3) Undefined tolerance is  $\pm 0.13\text{mm}$

# Material Structure

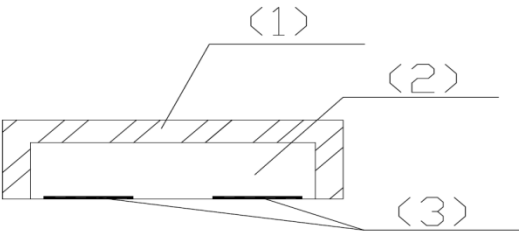

No.	List	Material
①	Encapsulation	Silicone, Phosphor
②	Chip Source	GaN ON SAPPHIRE
③	Solder-PAD	Metal (Au)

## Reflow Soldering Characteristics

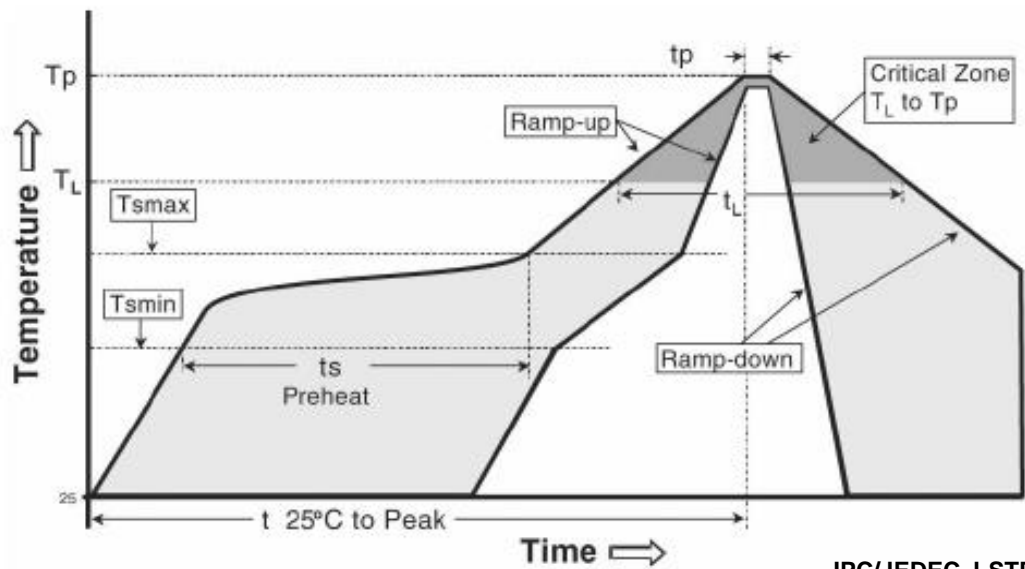

IPC/JEDEC J-STD-020

Profile Feature	Pb-Free Assembly
Average ramp-up rate (T <sub>max</sub> to T <sub>p</sub> )	3° C/second max.
Preheat <ul style="list-style-type: none"> <li>- Temperature Min (T<sub>min</sub>)</li> <li>- Temperature Max (T<sub>max</sub>)</li> <li>- Time (T<sub>min</sub> to T<sub>max</sub>) (ts)</li> </ul>	150 °C 180 °C 80-120 seconds
Time maintained above: <ul style="list-style-type: none"> <li>- Temperature (T<sub>L</sub>)</li> <li>- Time (t<sub>L</sub>)</li> </ul>	217~220°C 80-100 seconds
Peak Temperature (T <sub>p</sub> )	250~255°C
Time within 5°C of actual Peak Temperature (tp)2	20-40 seconds
Ramp-down Rate	6 °C/second max.
Time 25°C to Peak Temperature	8 minutes max.
Atmosphere	Nitrogen (O2<1000ppm)



### Caution

- (1) Reflow soldering is recommended not to be done more than two times. When 24 hours passed after first soldering, following reflow soldering will make LED damaged.
- (2) Re-soldering should not be done after the LED have been soldered. If re-soldering is unavoidable, LED's characteristics should be carefully checked on before and after such repair.
- (3) Do not put stress on the LED during heating.
- (4) After reflow, do not clean PCB with either water or solvent.

### SMT recommendation

- (1) After reflow, Over 80% reflectance of PSR is recommended.
- (2) Solder paste materials (SAC 305, No Cleaning Paste )
- (3) We recommend TOV Test 1.8V~2.8V at 1uA (per LED).
- (4) We recommend IR Test 0~1uA at -5V (per LED) for 3V.  
We recommend TOV Test 6.6V~8.5V at 30uA (per LED) for 9V.


## Emitter Tape & Reel Packaging

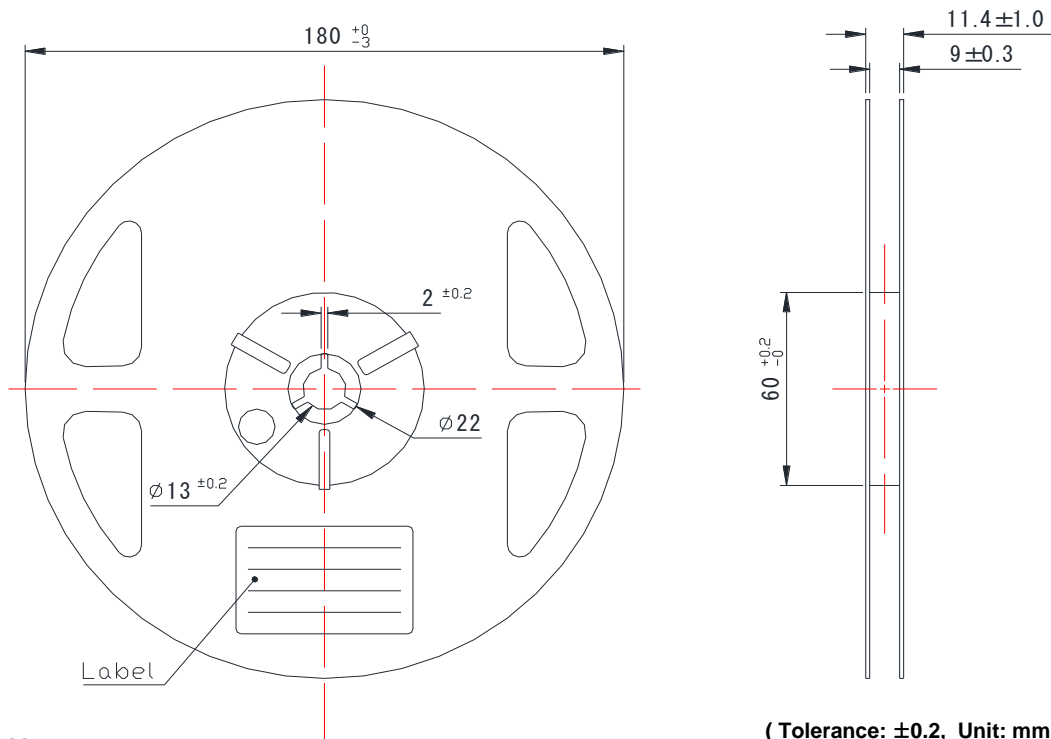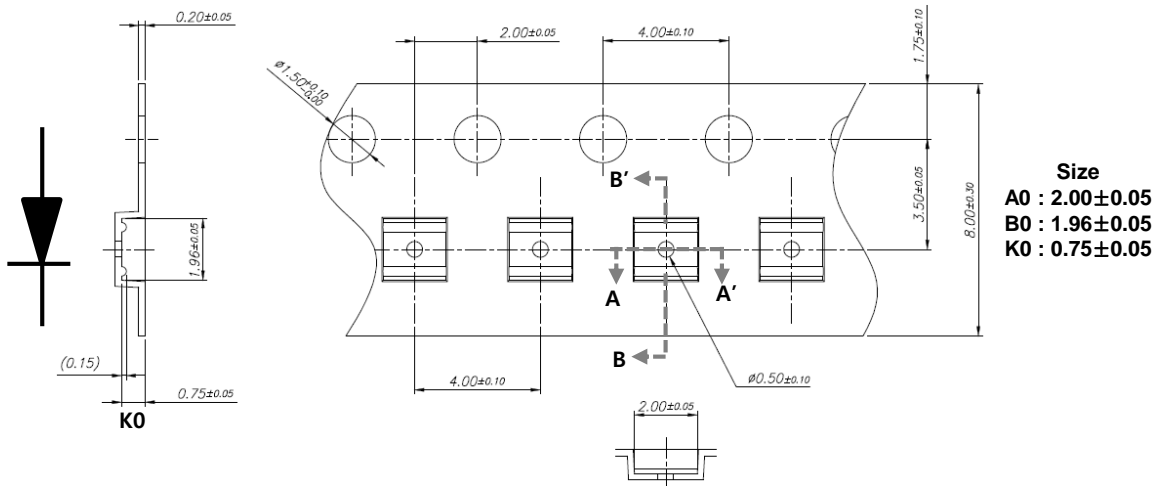

### Notes :

- (1) Quantity : 1,500pcs/Reel  
(empty slot possible in taping reel)
- (2) Cumulative Tolerance : Cumulative Tolerance/10 pitches to be  $\pm 0.2\text{mm}$
- (3) Adhesion Strength of Cover Tape : Adhesion strength to be 0.1-0.7N when the cover tape is turned off from the carrier tape at the angle of  $10^\circ$  to the carrier tape
- (4) Package : P/N, Manufacturing data Code No. and quantity to be indicated on a damp proof Package

## Packaging Information

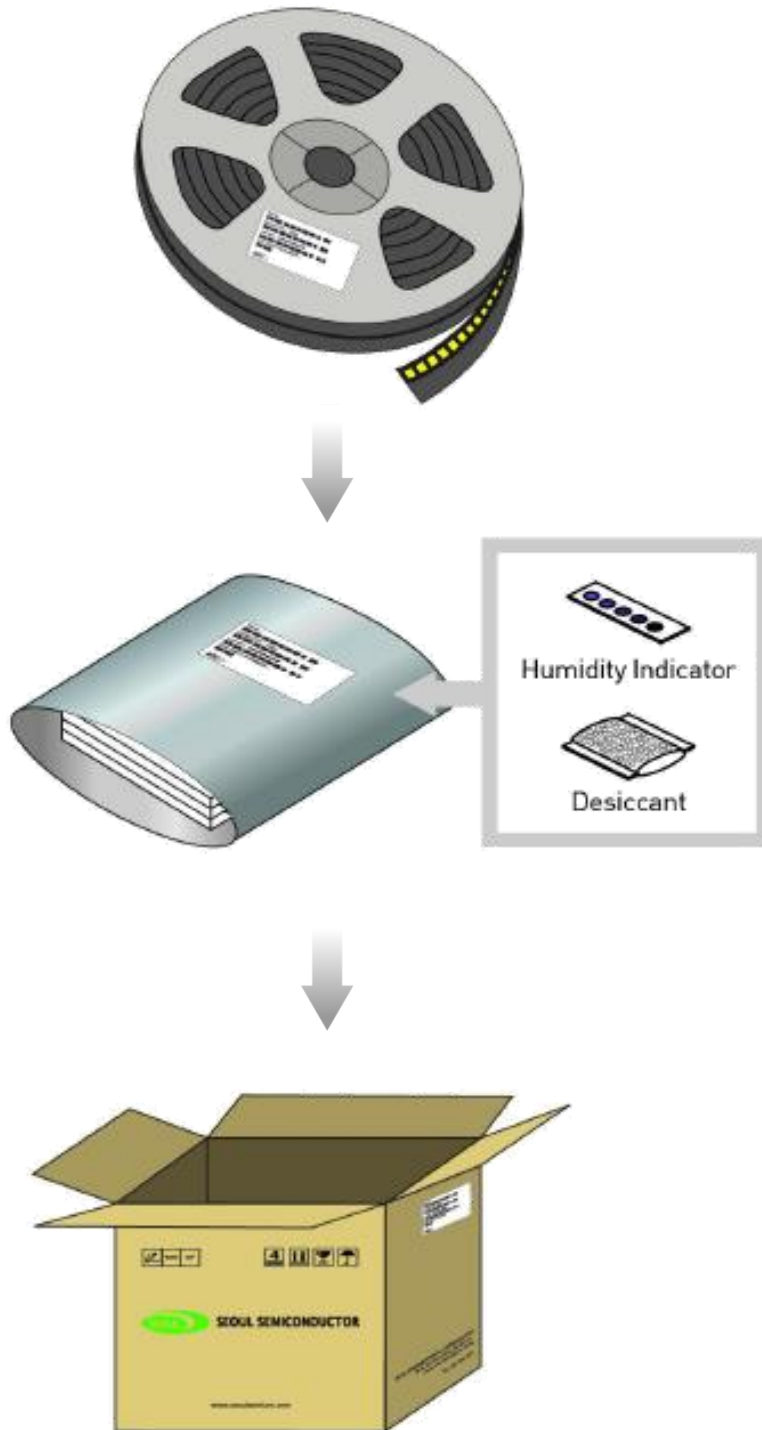

## Handling of Silicone Resin for LED

- (1) During processing, mechanical stress on the surface should be minimized as much as possible. Sharp objects of all types should not be used to pierce the sealing compound.



- (2) Do not use tweezers to pick up or handle WICOP2 LED. A vacuum pick up should only be used.
- (3) When populating boards in SMT production, there are basically no restrictions regarding the form of the pick and place nozzle, except that mechanical pressure on the surface of the resin must be prevented. This is assured by choosing a pick and place nozzle which is smaller than the LED's area.
- (4) Silicone differs from materials conventionally used for the manufacturing of LED. These conditions must be considered during the handling of such devices. Compared to standard encapsulants, silicone is generally softer, and the surface is more likely to attract dust. As mentioned previously, the increased sensitivity to dust requires special care during processing.
- (5) Please do not mold this product into another resin (epoxy, urethane, etc) and do not handle this product with acid or sulfur material in sealed space.
- (6) Avoid leaving fingerprints on silicone resin parts.

## Precaution for Use

### (1) Storage

To avoid the moisture penetration, we recommend storing LED in a dry box with a desiccant . The recommended storage temperature range is 5°C to 30°C and a maximum humidity of RH50%.

### (2) Use Precaution after Opening the Packaging

Use SMT techniques properly when you solder the LED as separation of the lens may affect the light output efficiency.

Pay attention to the following:

#### a. Recommend conditions after opening the package

- Sealing / Temperature : 5 ~ 30°C Humidity : less than RH60%

#### b. If the package has been opened more than 1 year (MSL 2) or the color of the desiccant changes, components should be dried for 10-24hr at 65±5°C

(3) Do not apply mechanical force or excess vibration during the cooling process to normal temperature after soldering.

(4) Do not rapidly cool device after soldering.

(5) Components should not be mounted on warped (non coplanar) portion of PCB.

(6) Radioactive exposure is not considered for the products listed here in.

(7) Gallium arsenide is used in some of the products listed in this publication. These products are dangerous if they are burned or shredded in the process of disposal. It is also dangerous to drink the liquid or inhale the gas generated by such products when chemically disposed of.

(8) This device should not be used in any type of fluid such as water, oil, organic solvent and etc.

(9) When the LED are in operation the maximum current should be decided after measuring the package temperature.

(10) The appearance and specifications of the product may be modified for improvement without notice.

(11) Long time exposure of sunlight or occasional UV exposure will cause lens discoloration.

## Precaution for Use

(12) VOCs (Volatile organic compounds) emitted from materials used in the construction of fixtures can penetrate silicone encapsulants of LED and discolor when exposed to heat and photonic energy. The result can be a significant loss of light output from the fixture. Knowledge of the properties of the materials selected to be used in the construction of fixtures can help prevent these issues.

(13) Attaching LED, do not use adhesives that outgas organic vapor.

(14) The driving circuit must be designed to allow forward voltage only when it is ON or OFF. If the reverse voltage is applied to LED, migration can be generated resulting in LED damage.

(15) LED are sensitive to Electro-Static Discharge (ESD) and Electrical Over Stress (EOS). Below is a list of suggestions that Seoul Semiconductor purposes to minimize these effects.

### a. ESD (Electro Static Discharge)

Electrostatic discharge (ESD) is defined as the release of static electricity when two objects come into contact. While most ESD events are considered harmless, it can be an expensive problem in many industrial environments during production and storage. The damage from ESD to an LED may cause the product to demonstrate unusual characteristics such as:

- Increase in reverse leakage current lowered turn-on voltage
- Abnormal emissions from the LED at low current

The following recommendations are suggested to help minimize the potential for an ESD event. One or more recommended work area suggestions:

- Ionizing fan setup
- ESD table/shelf mat made of conductive materials
- ESD safe storage containers

One or more personnel suggestion options:

- Antistatic wrist-strap
- Antistatic material shoes
- Antistatic clothes

Environmental controls:

- Humidity control (ESD gets worse in a dry environment)



## Precaution for Use

### b. EOS (Electrical Over Stress)

Electrical Over-Stress (EOS) is defined as damage that may occur when an electronic device is subjected to a current or voltage that is beyond the maximum specification limits of the device. The effects from an EOS event can be noticed through product performance like:

- Changes to the performance of the LED package  
(If the damage is around the bond pad area and since the package is completely encapsulated the package may turn on but flicker show severe performance degradation.)
- Changes to the light output of the luminaire from component failure
- Components on the board not operating at determined drive power

Failure of performance from entire fixture due to changes in circuit voltage and current across total circuit causing trickle down failures. It is impossible to predict the failure mode of every LED exposed to electrical overstress as the failure modes have been investigated to vary, but there are some common signs that will indicate an EOS event has occurred:

- This damage usually appears due to the thermal stress produced during the EOS event.

### c. To help minimize the damage from an EOS event Seoul Semiconductor recommends utilizing:

- A surge protection circuit
- An appropriately rated over voltage protection device
- A current limiting device

(16) When separating PCBs from array panels with WICOP PKG, follow these precautions to avoid stress-induced failures:

- Never depanel manually by hand bending or snapping. Use dedicated depaneling machines with proper fixture support.
- Fix the PCB firmly during the cutting process to prevent flex or vibration from transferring to WICOP solder joints.
- Ensure that WICOP PKG is located at least 10 mm away from depaneling lines or routed edges.
- Do not use scissors or hand tools for cutting, as they generate uneven mechanical force.
- For FPCB, mount the panel on a support carrier before depaneling to prevent local bending or twisting.
- After depaneling, inspect under magnification for microcracks or lifted joints around WICOP chips.

## Precaution for Use

(17) After cutting or depaneling PCB/module with WICOP PKG, follow these mandatory inspection steps

- Perform visual inspection under magnification around each WICOP chip to detect cracks, delamination, or lifted pads.
- Conduct a 100% lighting test to check for failures such as dim, flickering, or non-lighting LEDs.
- Reject any chip showing cracks, white spots, or haze.
- Optionally combine with forward voltage (VF) testing to detect hidden internal damage.
- Record and separate NG parts before assembly into final modules.

## Company Information

### Published by

Seoul Semiconductor © 2013 All Rights Reserved.

### Company Information

Seoul Semiconductor ([www.SeoulSemicon.com](http://www.SeoulSemicon.com)) manufactures and packages a wide selection of light emitting diodes (LED) for the automotive, general illumination/lighting, Home appliance, signage and back lighting markets. The company is the world's fifth largest LED supplier, holding more than 10,000 patents globally, while offering a wide range of LED technology and production capacity in areas such as "nPola", "Acrich", the world's first commercially produced AC LED, and "Acrich MJT - Multi-Junction Technology" a proprietary family of high-voltage LED.

The company's broad product portfolio includes a wide array of package and device choices such as Acrich and Acirch2, high-brightness LED, mid-power LED, side-view LED, and through-hole type LED as well as custom modules, displays, and sensors.

### Legal Disclaimer

Information in this document is provided in connection with Seoul Semiconductor products. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Seoul Semiconductor hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party. The appearance and specifications of the product can be changed to improve the quality and/or performance without notice.