

LED Power Supply

Constant Voltage LED Driver | Input 198 – 264V AC | Output 24V DC

High Cost Performance, SELV. Short circuit, open circuit, overload and over temperature protection.
 Compliance to ERP directive, lifetime 30,000hrs.



items	conditions	request	note
-------	------------	---------	------

Input

Input voltage	Ta	198-264Vac	--
Input Frequency		50Hz/60Hz	--
Input Current	25°C, rated input voltage, output with max. rated power	<1A	--
Input Power		<175W	--
Efficiency		≥90%	--
Standby	25°C rated input voltage, output without load	<0.5W	Average
Inrush Current	25°C, rated input voltage	<75A	peak
PF	25°C, rated input voltage, output max. rated power	≥0.9	--

Output

Startup time	25°C, rated input voltage, output with max. rated power	<0.5S	--
Output voltage and precision	Ta, rated input voltage, output with rated power	24V±5%	--
Output current range	Ta, rated input voltage	0-0.625A	--
Output voltage wave	25°C, rated input voltage, output with max. rated power	<300mV	Vp-p
Output overload	25°C, rated input voltage, output with 2 times LED load	Yes	--
Output current and precision	Ta, rated input voltage, output with rated power	--	--
Rated output voltage range	Ta, rated input voltage,	-	--
Output current wave	25°C, rated input voltage, output with max. rated power	--	Ip-p
Dimming mode	--	--	--
Dimming range	--	--	--

Protection

open circuit	Ta, input rated voltage, output without load	--	--
overload	Ta, 0.94-1.06 times of input voltage, 1.2 times of rated power	yes	--
Short circuit	Ta, input 0.94-1.06 times input voltage,	yes	--
Over temperature	IC detect temperature	yes	--
Over voltage	Ta, 0.94-1.06 times of input voltage, output voltage is 1.5 times of rated one	yes	--
Auto recovery	Over load, short circuit revocation	yes	--
Latch off	Over voltage, over heat re-start after cut off	yes	--

SE150-24VL

Temperature and others

Operating temperature	--	-20° C ~ 45° C	--
Relative humidity	--	45%~ 85%	--
max. Case temp.	--	90° C	--
products life span	under max Ta,input rated voltage and output max rated load		30,000hr
working noise	25°C, rated input voltage,output with rated power, mute box background noise<35dB, pickup 10cm distance from products		Yes




Mechanical, mounting

Case material and size	Plastic L179.4*W62.5*H30.6mm		
Mounting ways	independent		
Insulation type	Class II		
IP grade	IP20		
Input cables dimension	H03VVH2-F 2X0.75mm ²		
Output cables dimension	H05VVH2-F 2X1.0mm ²		
Output cables length	Max. 2 M		

Standard request

Safety	IEC61347-1 IEC61347-2-13		
Harmonic	EN61000-3-2 Class C		
EMC	EN55015		
EMS	EN61000-4-2 3 4 5 6 EN61547		

Dimensions

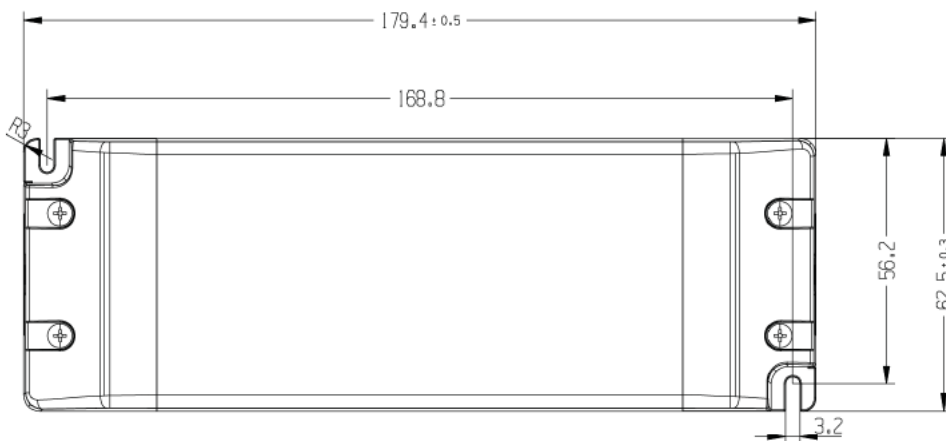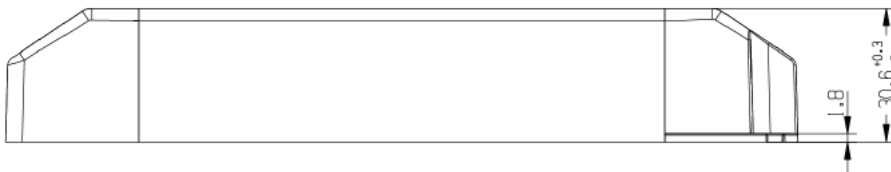

Wiring Diagram

