



## LED POWER SUPPLY

Linear type LED drivers, high cost performance and meet SELV standard. Widely used in all kinds of advertising light boxes and board, neon lights and other applications. Can also be applied in cabinet furniture and linear luminaire field. Compliance to ERP directive, lifetime 30,000hrs. Slim design save much space for installation. Dimmable design meet the requirements for dimming of all kinds of linear light.



SELV

items	conditions	request	note
-------	------------	---------	------

### Input

input voltage	Ta	AC180-264V	
input frequency		50/60Hz	
input current		<0.6A	
input power	25°C , input rated voltage, output max rated load	<88W	
Efficiency		≥89%	
Standby	25°C , rated input voltage, output without load	< 0.5W	average
inrush current	25°C , rated input voltage	<75A	Peak
PF	25°C , rated input voltage, output max. rated power	≥ 0.9	

### Output

startup time	25°C , rated input voltage, output with max. rated power	<0.5S	
Output voltage and precision	rated input voltage, output with max. rated power	12V±5%	
Output current range	Ta , rated input voltage	0-6.25A	75W
Output voltage wave	25°C , rated input voltage, output with max. rated power	500mV	Vp-p
Output overload	25°C , rated input voltage, output with 2 times LED load	Yes	
Output current and precision	Ta , rated input voltage, output with rated power	--	
Rated output voltage range	Ta , rated input voltage	--	
Output current wave	25°C , rated input voltage, output with max. rated power	--	Ip-p
Dimming mode		--	
Dimming range		--	

### Protection

open circuit	Ta, rated input voltage, no load	--	--
over load	Ta, 0.94-1.06 times of input voltage, 1.8times of rated power	yes	--
short circuit	Ta, 0.94-1.06 times of input voltage	yes	--
over temperature	Ta, 0.94-1.06 times of input voltage, temperature detected pointed more than 115 degree	--	--
over voltage	Ta, 0.94-1.06 times of input voltage, output voltage is 1.5 times of rated one	yes	--
Auto recovery	Over load short circuit revocation	yes	--
Latch off	Over voltage re-start after cut off	yes	--

## Temperature and others

operation temperature	--	-20° C – 45° C	--
Relative humidity	--	45%~ 85%	--
max case temperature	--	90° C	--
lifetime	Max.Ta,rated input voltage,output with max.rated power	30,000hr	--
working noise	25°C ,rated input voltage,output with rated power, mute box background noise<35dB, pickup 10cm distance from products	yes	--


## **Mechanical, mounting**

Case material and size	Plastic case
Mounting ways	Independent
Insulation type	Class II
IP grade	IP20
Input cables dimension	H03VVH2-F 2X0.75mm <sup>2</sup>
Output cables dimension	H03VVH2-F 2X0.75mm <sup>2</sup>
Protection Output cables length	Max 2000mm

## **Standard**

Safety	IEC61347-1 IEC61347-2-13
Harmonic	EN61000-3-2 Class C
EMI	EN55015
EMS	EN61000-4-2 3 4 5 6 EN61547

## Dimensions

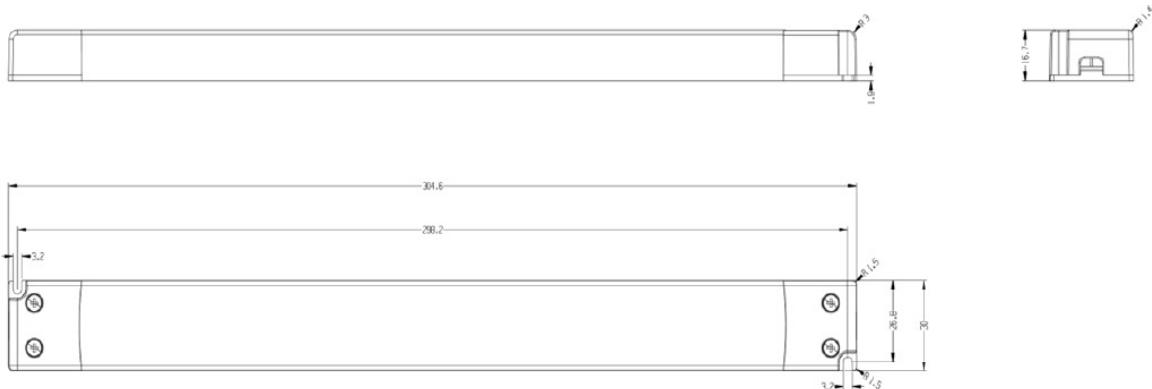

## **Wiring Diagram**

