

LED Power Supply

Constant Voltage LED Driver | Input 200 – 240V AC | Output 24V DC

High Cost Performance,SELV. short circuit,overload and over temperature protection.
Compliance to ERP directive,lifetime 30,000hrs.



items	conditions	request	note
-------	------------	---------	------

Input

Input voltage	Ta	200-240Vac	--
Input Frequency		50Hz	--
Input Current	25°C, rated input voltage, output with max. rated power	<0.5A	--
Input Power		<90W	--
Efficiency		≥90%	--
Standby	25°C rated input voltage, output without load	<0.5W	Average
Inrush Current	25°C, rated input voltage	<75A	peak
PF	25°C, rated input voltage, output max. rated power	≥0.9	--

Output

Startup time	25°C, rated input voltage, output with max. rated power	<2S	180VAC 50Hz
Output voltage and precision	Ta, rated input voltage, output with rated power	24V±5%	<25V
Output current range	Ta, rated input voltage	0-3.125A	--
Output voltage wave	25°C, rated input voltage, output with max. rated power	<240mV	Vp-p
Output overload	25°C, rated input voltage, output with 2 times LED load	yes	--
Output current and precision	Ta, rated input voltage, output with rated power	--	--
Rated output voltage range	Ta, rated input voltage,	-	--
Output current wave	25°C, rated input voltage, output with max. rated power	--	Ip-p
Dimming mode	--	--	--
Dimming range	--	--	--

Protection

open circuit	Ta, input rated voltage, output without load	--	--
overload	Ta, 0.94-1.06 times of input voltage, 1.2 times of rated power	yes	--
Short circuit	Ta, input 0.94-1.06 times input voltage,	yes	--
Over temperature	IC detect temperature	yes	--
Over voltage	Ta, 0.94-1.06 times of input voltage, output voltage is 1.5 times of rated one	yes	--
Auto recovery	Over load, short circuit revocation	yes	--
Latch off	Over voltage, over heat re-start after cut off	yes	--

Temperature and others

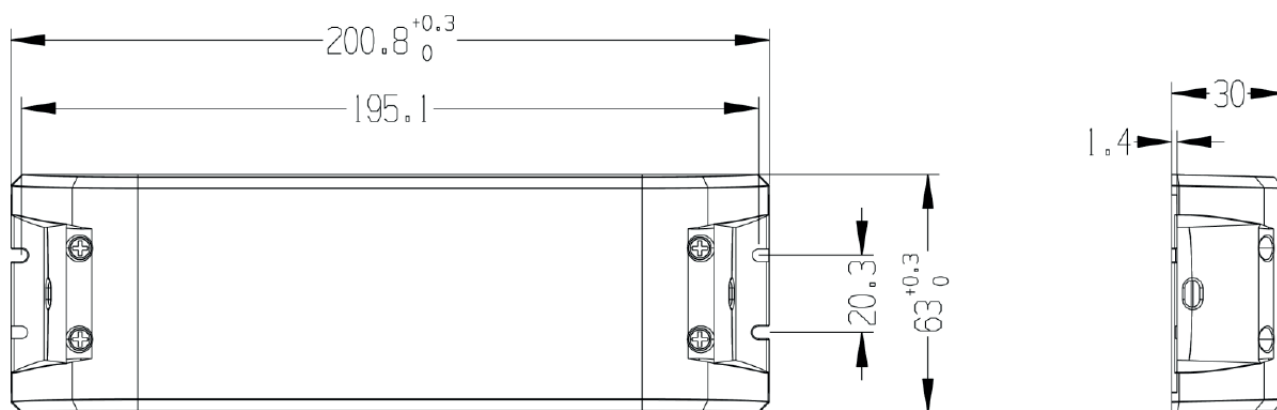
Operating temperature	--	-20° C ~ 45° C	--
Relative humidity	--	45% ~ 85%	--
max. Case temp.	--	80° C	<90° C
products life span	under max Ta,input rated voltage and output max rated load		30,000hr
working noise	25°C, rated input voltage,output with rated power, mute box background noise<35dB, pickup 10cm distance from products		<35dB

Mechanical, mounting

Case material and size	Plastic 200.5mm*62.5mm*30mm
Mounting ways	independent
Insulation type	Class II
IP grade	IP20
Input cables dimension	H03VVH2-F 2x0.75mm ²
Output cables dimension	H05VVH2-F 2x1.0mm ²
Output cables length	max 2 m

Standard request

Safety	IEC61347-1,IEC61347-2-13 in combination with ilght IEC60598)
Harmonic	IEC61000-3-2
EMC	IEC55015
EMC	IEC61547

Dimensions


Wiring Diagram

