

Product Datasheet



The global certified TLD-240-C is a dual stage extremely wide input smart LED driver. 10kV surge protection level, 100khour long life and 7-year warranty provide high confidence to luminaire users. It supports not only traditional 4-in-1 control, but also DALI2.0 and other protocols. NFC and cable programming are both available for users. All around protections including digital OTP (internal and external by NTC) with auto-recovery secure 24hour non-stop operation for luminaires.

☒ Road
 ☒ High-bay
 ☒ Horticultural
 ☒ Stadium
 ☒ Flood



■ Features	2
■ Model List	2
■ Technical Data	2
■ Safety/EMC Compliance	4
■ Dimming	4
■ Programming	6
■ Lifetime vs. Case Temperature	8
■ Power Factor vs. Load	8
■ THD vs. Load	9
■ Efficiency vs. Load	9
■ Inrush Current	11
■ Dielectric Strength	12
■ Tc Point	13
■ Packaging Information	13
■ Mechanical Design	14
■ Output Operation Range	19
■ Revision History	21

240W, 200-480Vac Input, Isolated Dimming LED Driver

■ Features

- Supply Voltage: 180-528Vac or 250-740Vdc
- Great Surge Immunity 10kV
- -60°C Cold Ambient Startup (Optional)
- 100,000Hour Life @ Tc=75°C
- 7 Year Warranty @ Tc<=75°C
- Airset™ NFC Programmability
- +/-2% Output Current Accuracy
- Isolated 0-10V/PWM/Time/DALI2.0/DMX/RDM Dimmable
- Dim Off with 1.5W Standby Power
- 12V 300mA Auxiliary Power to Power Controllers and Fans (Optional)
- UL Class P, ENEC/CB/CCC SELV Output
- Global Certified Model Available
- Safety according to EN 61347-1, 61347-2-3, 61347-2-13, 62384

■ Model List

Model Number	Input Voltage Range	Output Power	Output Voltage	Full Power Settable Current Min	Full Power Settable Current Max
TLD-240-C140-XYZ	180-528Vac	250 W	107-238Vdc	1050mA	1400mA
TLD-240-C210-XYZ	180-528Vac	250 W	71-179Vdc	1400mA	2100mA
TLD-240-C420-XYZ	180-528Vac	250 W	36-89Vdc	2800mA	4200mA
TLD-240-C690-XYZ	180-528Vac	250 W	22-56Vdc	4500mA	6900mA

XY=	Dimming Method	Programmable	12Vaux	Dim-off
NN	-	-	-	-
DN	0-10V/PWM/Time	Cable	-	No Dim-off as default status, programmed to have Dim-off
EN	0-10V/PWM/Time	Cable	300mA	√
TR	Time/Set Current	NFC Wireless	-	-
DR	0-10V/PWM/Time	NFC Wireless	-	No Dim-off as default status, programmed to have Dim-off
ER	0-10V/PWM/Time	NFC Wireless	300mA	√
AR	DALI2.0	NFC Wireless	-	√
MR	DMX512 + RDM	NFC Wireless	-	√

Z=	U	V	S	S-GLB000	W	D
Input Cable	3 pin UL cable with ground	3 pin UL cable with ground	3 pin VDE cable with ground	3 pin Global cable with ground	3 pin VDE cable with ground	2 pin VDE cable without ground
Output Cable	2 pin UL cable without Ground	3 pin UL cable with ground	2 pin VDE cable without ground	2 pin Global cable with ground	3 pin VDE cable with ground	2 pin VDE cable without ground
Certified Input Voltage Range	UL Listed Class P 200-480Vac	UL Listed Class P 200-480Vac	ENEC CB RCM Class I 200-480Vac	UL Recognized ENEC CB RCM Class I 200-480Vac	Class I 200-480Vac	Class II 200-480Vac

240W, 200-480Vac Input, Isolated Dimming LED Driver

■ Technical Data

Input Voltage	180-528Vac or 250-740Vdc
Input Frequency	47~63Hz
Power Factor	>0.9@60-100%load, refer to PF vs. Load curve
THD	<15%@70-100%load, refer to THD vs. Load curve
Input Current	1.1Amax@277Vac & Full-Load, 0.65Amax@480Vac & Full-Load
Inrush Current	See Inrush Current Section in the datasheet
Leakage Current	0.75MIU max @480Vac 60Hz, UL8750 0.7mA max @400Vac 50/60Hz, IEC60598-1
Input Under Voltage	Shut down and auto-restart
Surge Protection	Line to line 6kV, line to ground 10kV, IEC 61000-4-5
Current Accuracy	±2%Io for programmable model, ±5%Io for non-programmable model
Ripple Current	Ip-p:5%Io max
Setup Time	1.2s max
Overshoot	10% Io max & LED Load
Output Over Voltage	120% Vomax, typ.
Short Circuit	Auto recovery. The output recovers when short is removed.
Over Temperature	Lower the output current when $T_c \geq 105 \pm 10^\circ\text{C}$; Auto Recovery When $T_c \leq 70 \pm 10^\circ\text{C}$
Auxiliary Power (Vaux)	12V+/-5%, 300mA max
Operating Temperature	Case Temperature $T_c = -40^\circ\text{C} \sim +90^\circ\text{C}$; 10%RH~100%RH
Storage Temperature	$-40^\circ\text{C} \sim +85^\circ\text{C}$; 5%RH~100%RH
MTBF	$\geq 280,000$ hours, 75°C case temperature (MIL-HDBK-217F)
Lifetime	$\geq 100,000$ hours, 75°C case temperature, refer to life vs. T_c curve
Case Temperature	90°C max, marked in the T_c point of label
Dimensions	8.85x2.68x1.31 by inch (body), 9.88x2.68x1.31 by inch (endcaps included) 225 x 68 x 33.5 by mm (body), 251 x 68 x 33.5 by mm (endcaps included)
Net Weight	1100g
Packing	See Package Information Section in the datasheet

Notes: Unless specified, all the test results are measured in 25°C room temperature.

240W, 200-480Vac Input, Isolated Dimming LED Driver

■ Safety/EMC Compliance

Safety Standards	Description
UL8750	Light emitting diode(LED) equipment for use in lighting products
UL1012/1310	Power units other than class 2 / Class 2 power units
IEC 61347-1	Lamp control gear Part 1: general and safety requirements
IEC 61347-2-13	Lamp control gear Part 2-13: particular requirement for d.c. or a.c. supplied electronic control gear for LED modules
IEC 62384	DC or AC supplied electronic control gear for LED modules - Performance requirements
IEC 55015/FCC Part 15	Conducted emission test & radiated emission test; ANSI C63.4:2009 Class B
IEC 61000-3-2	Harmonic current emissions; Class C
IEC 61000-3-3	Voltage fluctuations & flicker
IEC 61000-4-2	Electrostatic discharge (ESD): 8 kV air discharge, 4 kV contact discharge
IEC 61000-4-3	Radio frequency electromagnetic field susceptibility test (RS)
IEC 61000-4-4	Electrical fast transient (EFT)
IEC 61000-4-5	Surge immunity test
IEC 61000-4-6	Conducted radio frequency disturbances test (CS)
IEC 61000-4-8	Power frequency magnetic field test
IEC 61000-4-11	Voltage dips
IEC 61547	Electromagnetic immunity requirements applies to lighting equipment



■ Dimming

Parameter	Min.	Typ.	Max.
Vdim Sourcing Current	100uA	150uA	200uA
Vdim Allowed Input Voltage	-20 V		20 V
0-10V Dimming Range	10% (Vdim=1V)	Linear	100% (Vdim=9~10V)
PWM Dimming Range	10% (Duty=10%)	Linear	100% (Duty=90-100%)
Default Dim off Threshold	0.4V or 4%	0.5V or 5%	0.6V or 6%
Default Dim off Threshold	0.6V or 6%	0.7V or 7%	0.8V or 8%
PWM High	3.8V		9V
PWM Low	0V		0.6V
PWM Frequency	300Hz		2kHz
DALI Interface Standard	IEC62386, part 101,102,207		
DA1,DA2 High Level	9.5	16	22.5
DA1,DA2 Low Level	-6.5	0	6.5
DA1,DA2 Current	0		2mA
DMX+ & DMX- Voltage	-6V		6V
DMX to Ground Resistance	25Mohm		
Logic 0/1 (DMX+ to DMX-) Threshold		0.2V	
Communication Baud Rate		250kbps	
Fast Dimming ^[1] On-Off Transition		300ms	
Fast Dimming 10-100% Io Transition		70ms	



Notes [1]: Fast dimming feature is only available by models with -FD0000 suffix.

- Default Dimming Curves



a. 0-10V dimming without dim-off

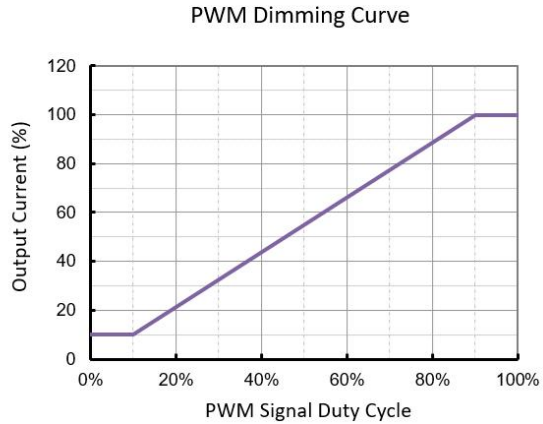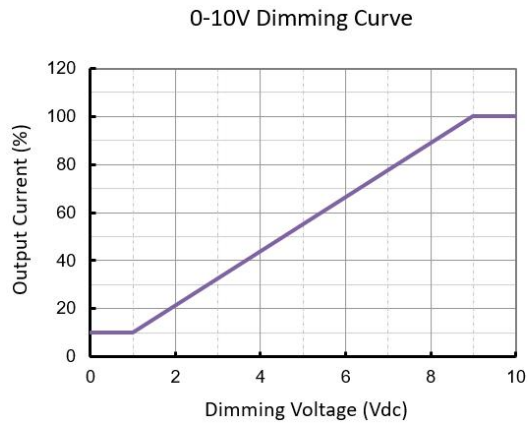

b. 0-10V dimming with dim-off

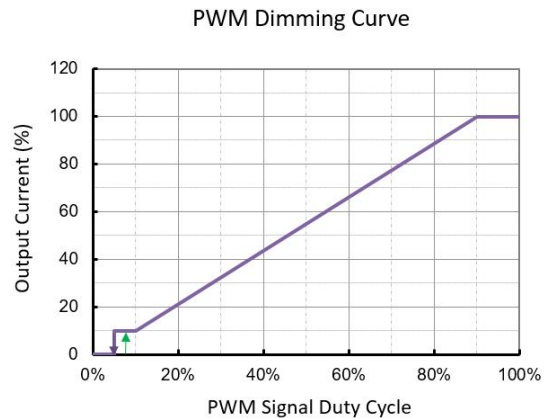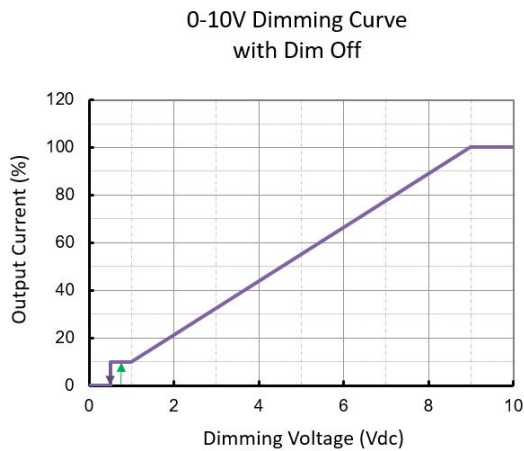

c. DALI and DMX dimming curves

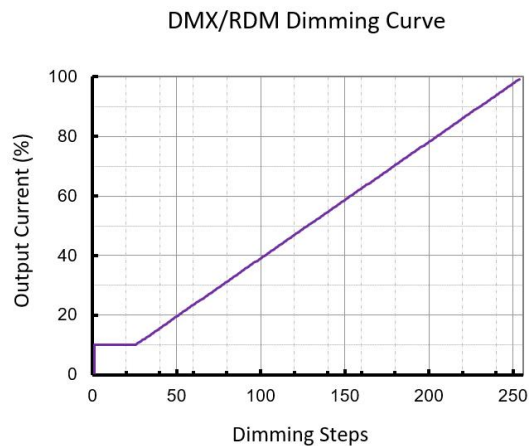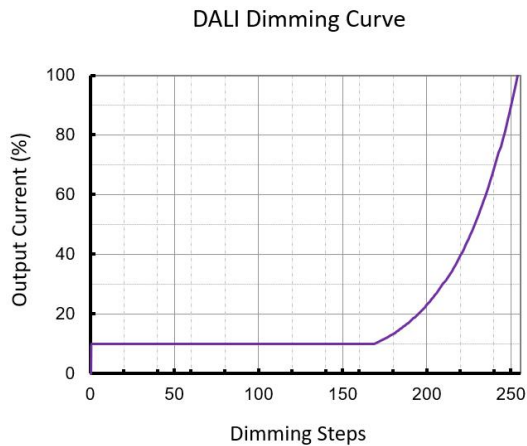


Note: Both DALI and DMX dimming curves can be customized to be linear or logarithmic as default.

■ Programming

- Programmable Functions

uPowerTek LED drivers offer a range of configurable functions to meet specific lighting requirements. The Output Current, Dimming Mode, Dim Off/On Voltage Threshold, and Timer Dimming can be set as basic programming functions. Constant Lumen Output (CLO) can also be customized to ensure consistent light performance. Additionally, depending on the different product model numbers, users can benefit from programming Thermal Protection by external NTC (with extra cable), DALI/D4i Features, and DMX addressing.

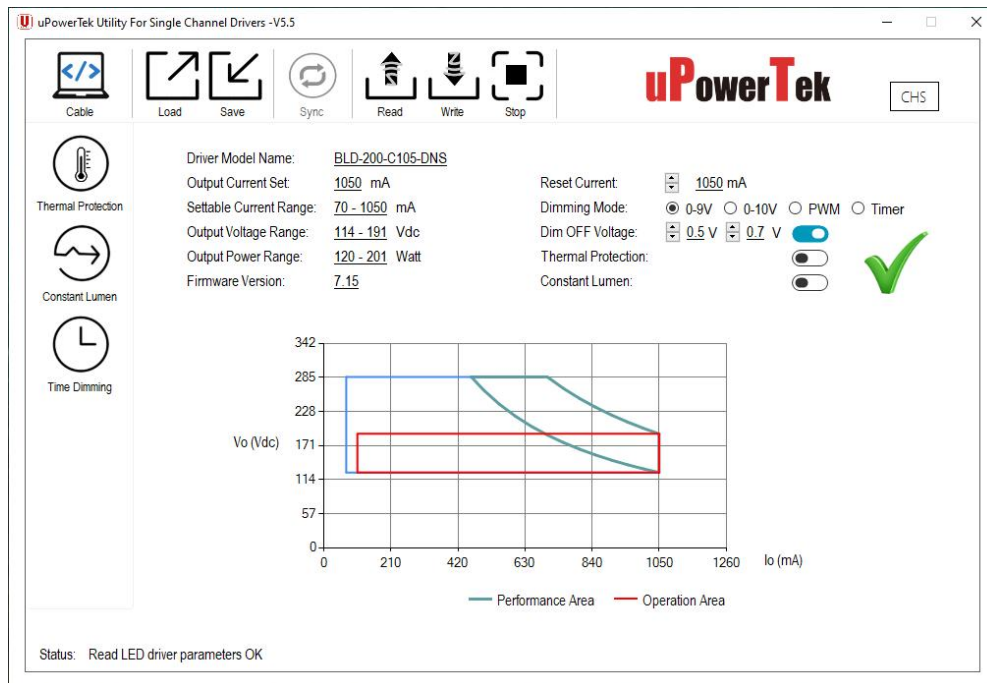

uPowreTek Programming Software Interface

- Required Equipment

To program uPowerTek LED drivers, users will need specific equipment based on their preferred method. For wired programming, the uPowerTek Cable Programmer is essential. For NFC wireless programming, users can use a smartphone with either IOS or Android, the uPowerTek NFC Programmer, or the FEIG NFC Programmers. These tools ensure a seamless and efficient setup process, realizing precise customization of the LED driver settings.



Cable Programmer



NFC Programmer V1



NFC Programmer V2



FEIG NFC Programmer




Android or iPhone

240W, 200-480Vac Input, Isolated Dimming LED Driver

- Connection Guide

This guide provides simple connection diagrams to help users understand the programming system. For more detailed operating instructions, including step-by-step procedures and additional configurations, please visit our website. You can download the comprehensive user manual and necessary software from the following link:

<https://www.upowertek.com/download-2/>.

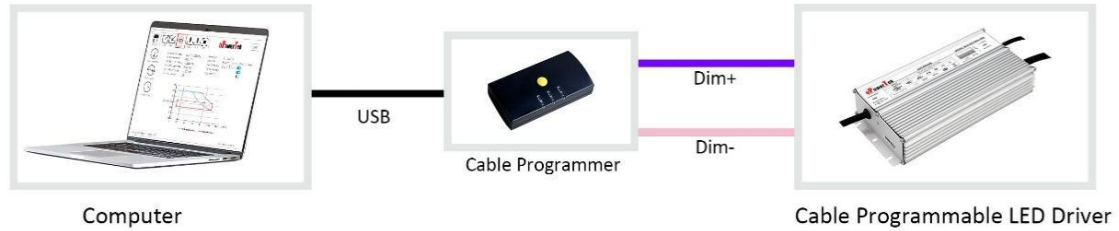

Wired Programming




Wireless Programming




Cellphone Programming

Lifetime vs. Case Temperature

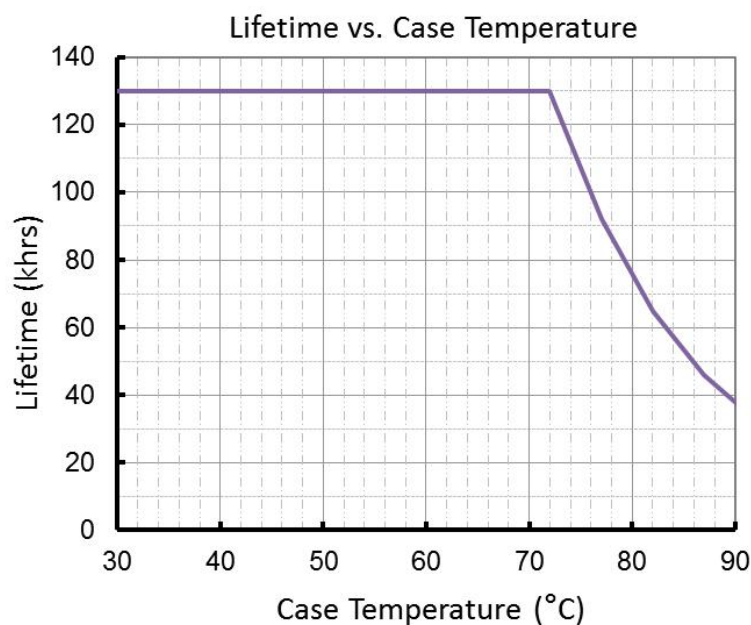


(End of Life: Maximum Failure Rate=10%)


Power Factor vs. Load

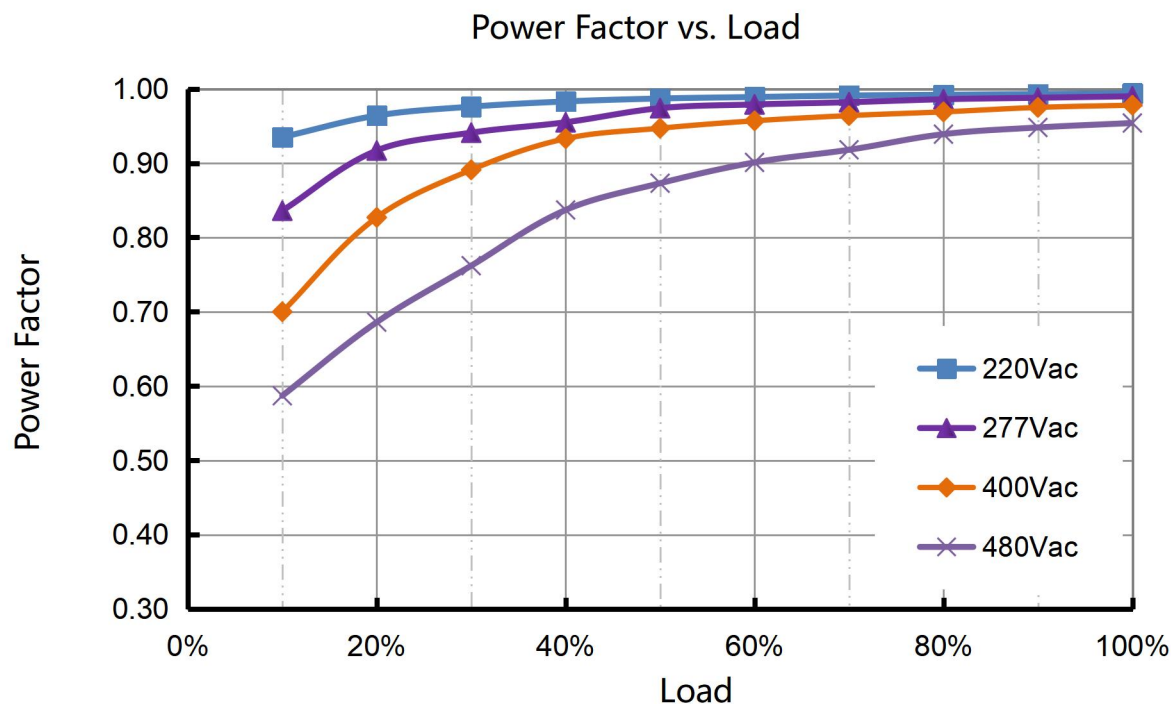


■ THD vs. Load

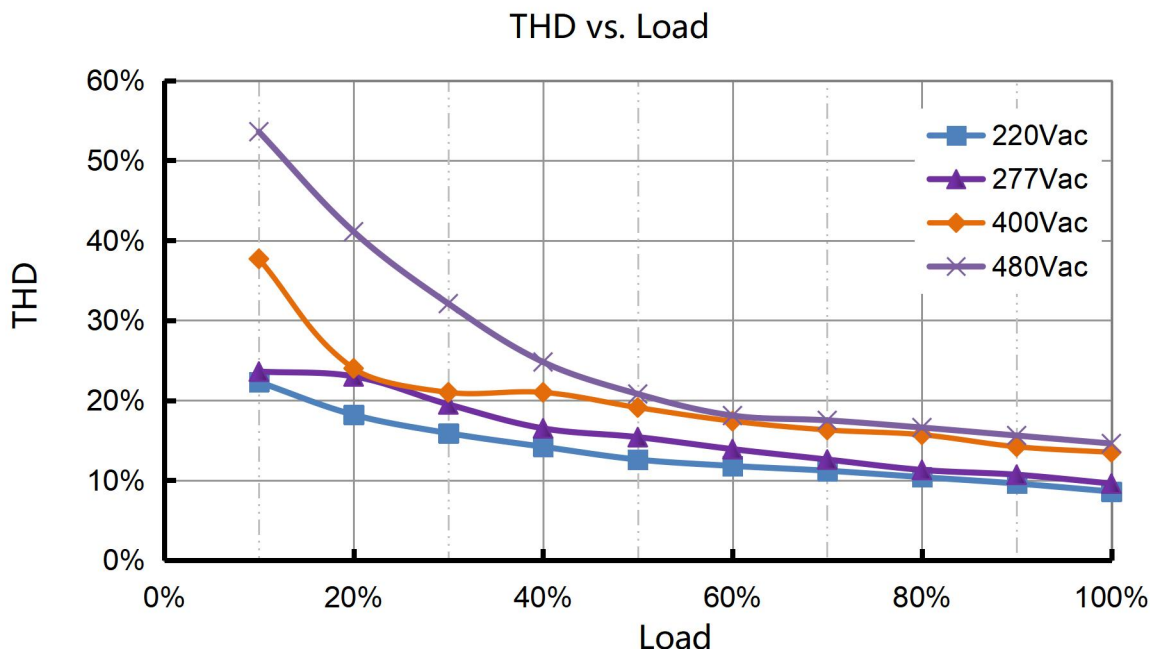


■ Efficiency vs. Load

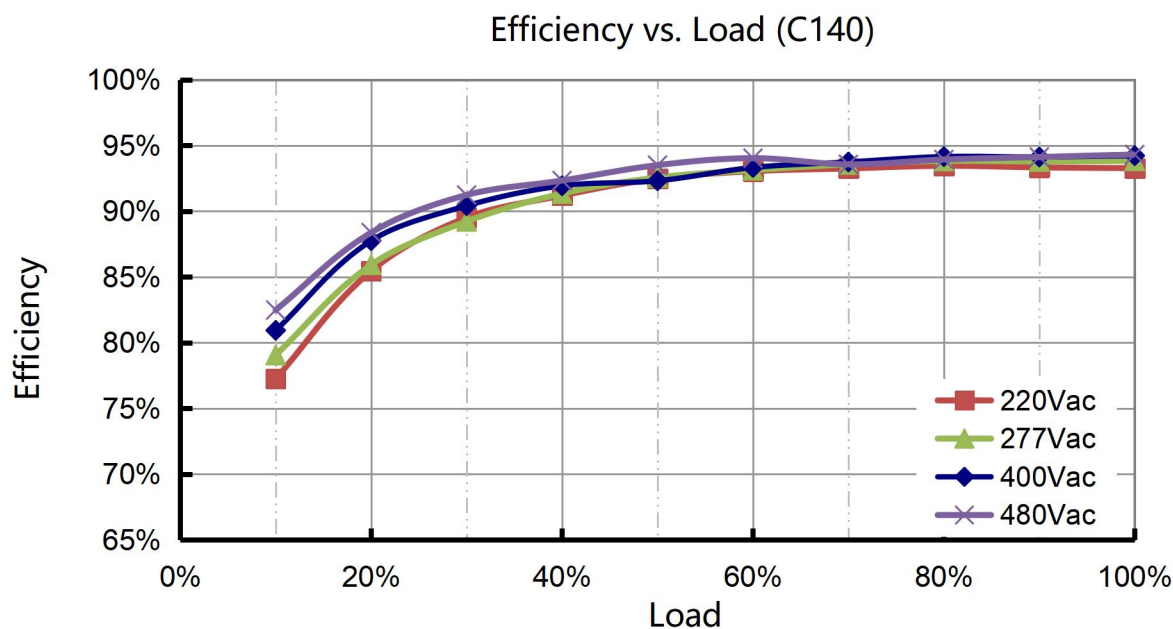


Efficiency vs. Load (C210)

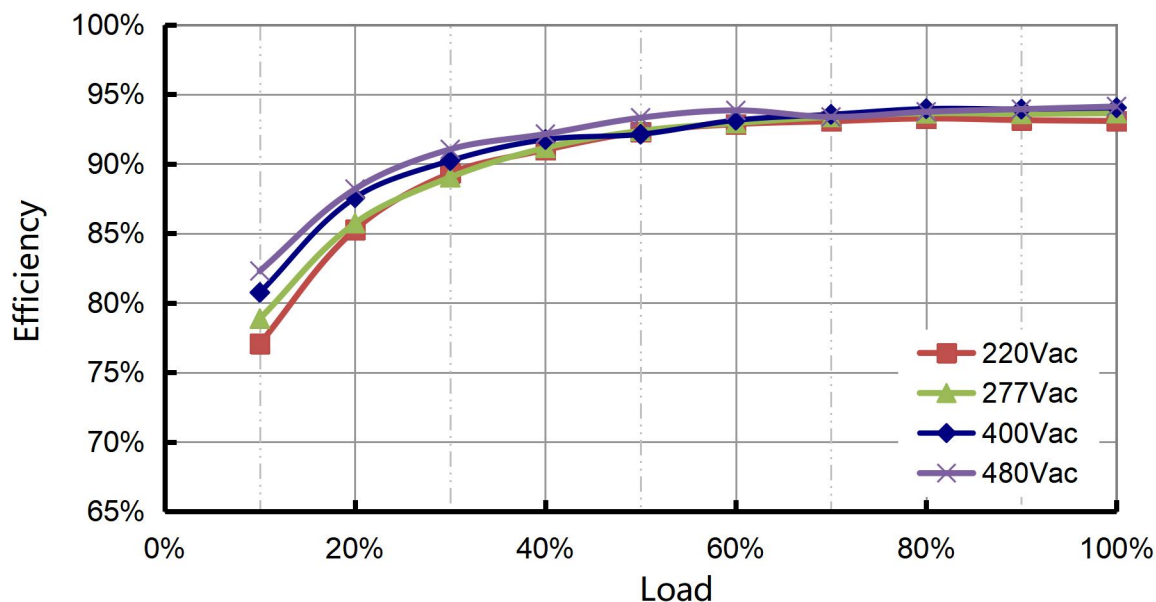


Efficiency vs. Load (C420)

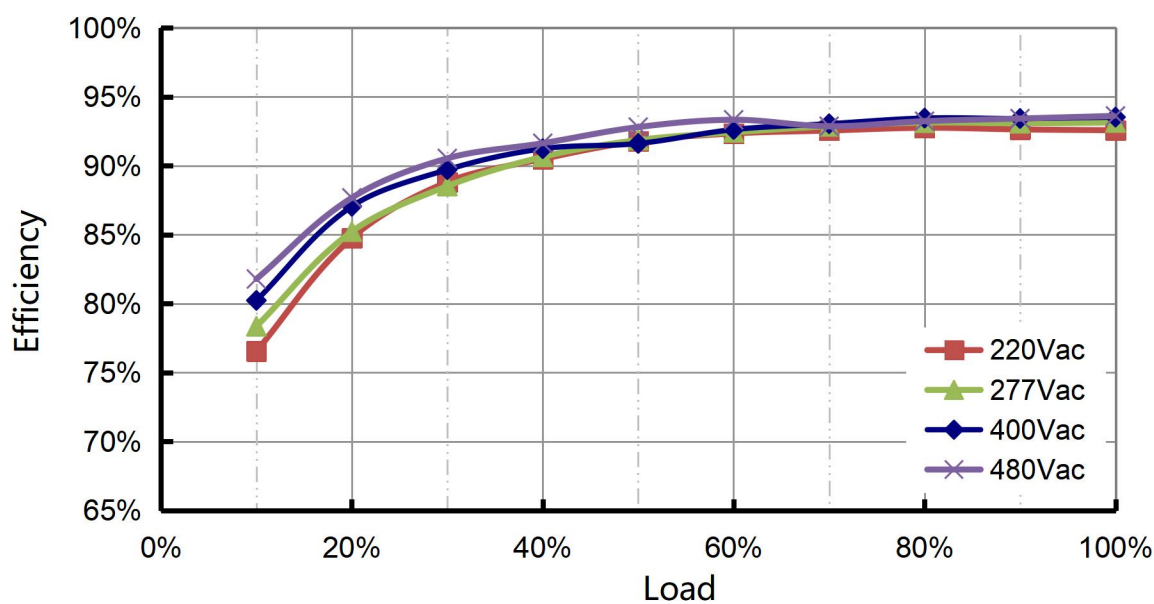

Efficiency vs. Load (C690)

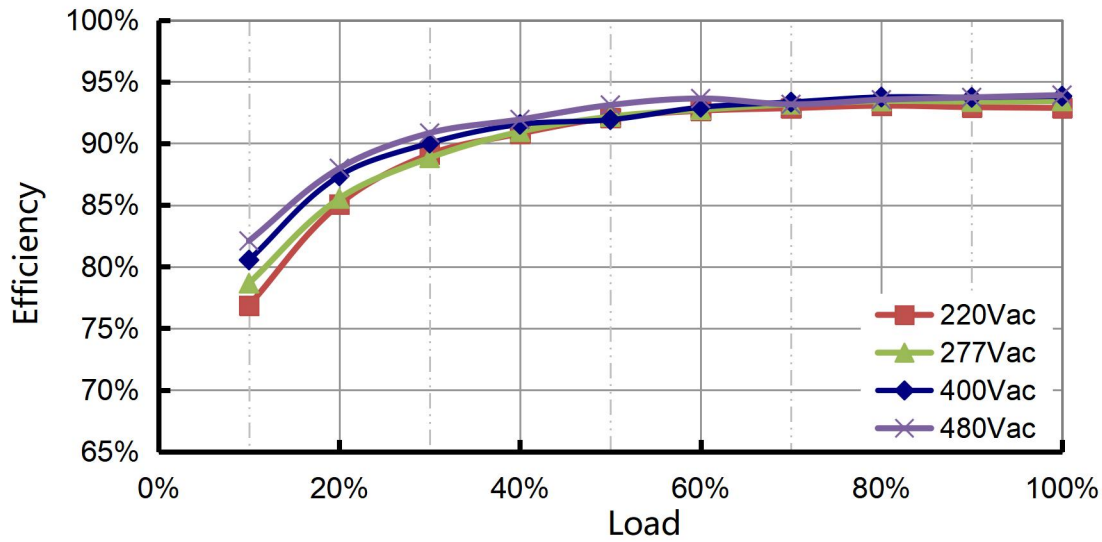

Inrush Current

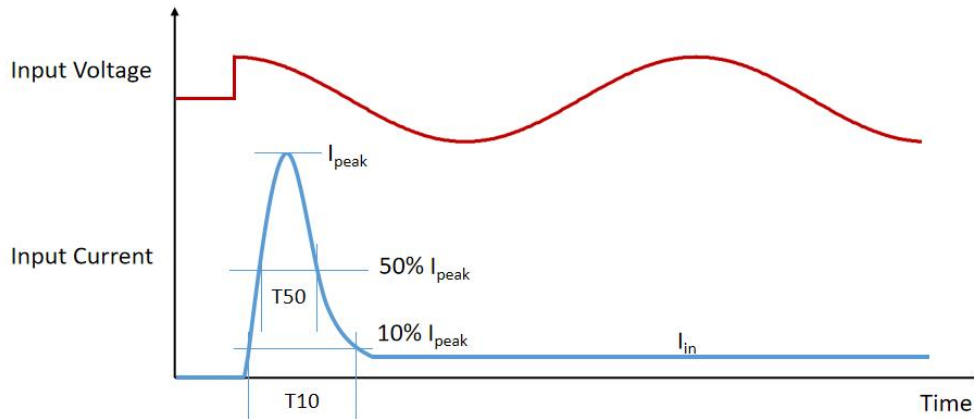


Input Voltage	I_{peak}	10% -10% T10 Duration	50% -50% T50 Duration
220Vac	60A	540μs	250μs
277Vac	82.8A	492μs	240μs
400Vac	100.4A	376μs	180μs
480Vac	120.4A	356μs	170μs

240W, 200-480Vac Input, Isolated Dimming LED Driver

- MCB Suggestion

Type	B10	B16	B25	B32	C10	C16	C25	C32	D10	D16	D25	D32
220Vac	4	7	12	15	5	8	14	17	6	10	16	20
277Vac	3	6	9	12	6	10	16	21	8	13	20	26
400Vac	4(x3)	7(x3)	12(x3)	15(x3)	5(x3)	8(x3)	14(x3)	17(x3)	6(x3)	10(x3)	16(x3)	20(x3)
480Vac	3(x3)	6(x3)	9(x3)	12(x3)	6(x3)	10(x3)	16(x3)	21(x3)	8(x3)	13(x3)	20(x3)	26(x3)


Three phase wiring suggestion.

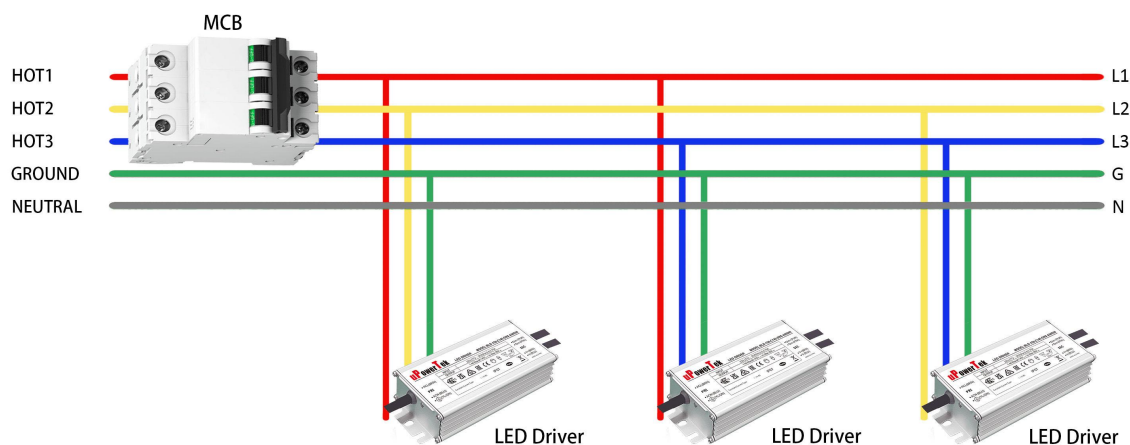

■ Dielectric Strength


Unit: Vac	Input	Output	Dimming	Case
Input	-	3920	3920	1960
Output	3920	-	1960	1960
Dimming	3920	1960	-	1960
Case	1960	1960	1960	-

■ Tc Point

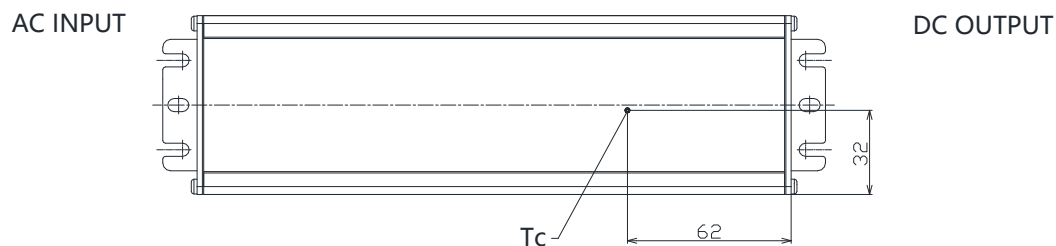


■ Packaging Information

Typical Carton Dimension(L×W×H)	490×370×115 mm
Positioning plate	2pcs/carton
Shield Board	1pcs/carton
LED Drivers/LED	10pcs/carton
Net Weight	10.4 kg/carton
Gross Weight	11.3 kg/carton

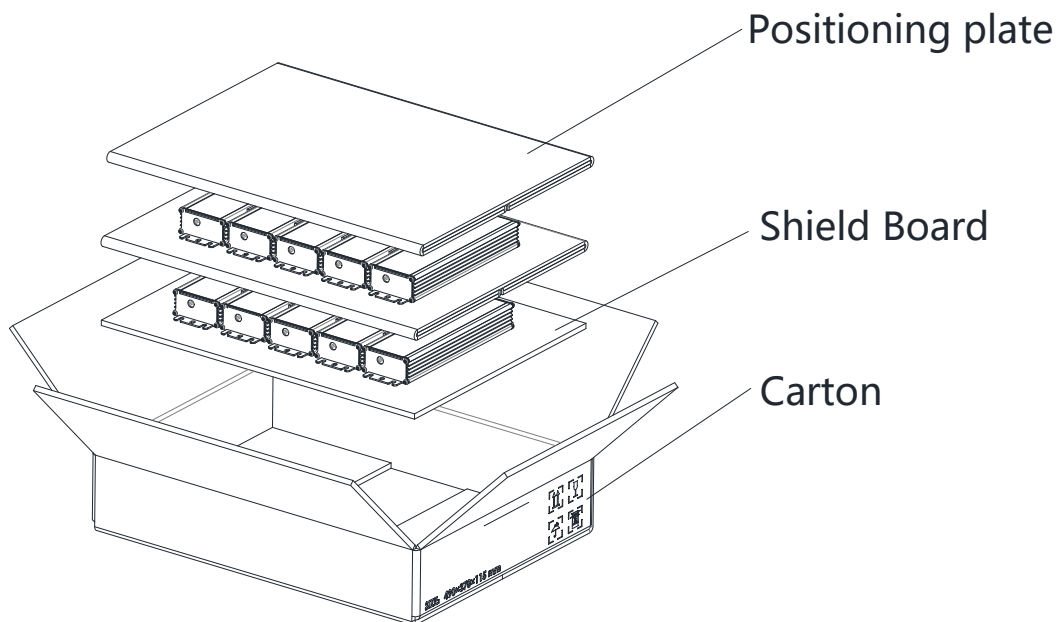


Mechanical Design

TLD-240-Cxxx-NN/TRU (UL Cable)

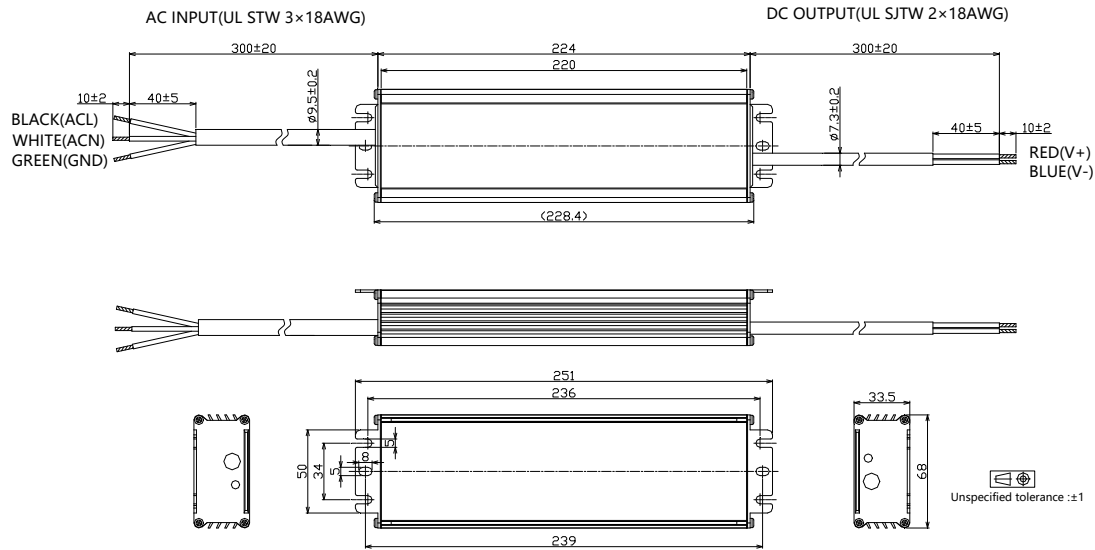


TLD-240-Cxxx-DN/DRU (UL Cable)

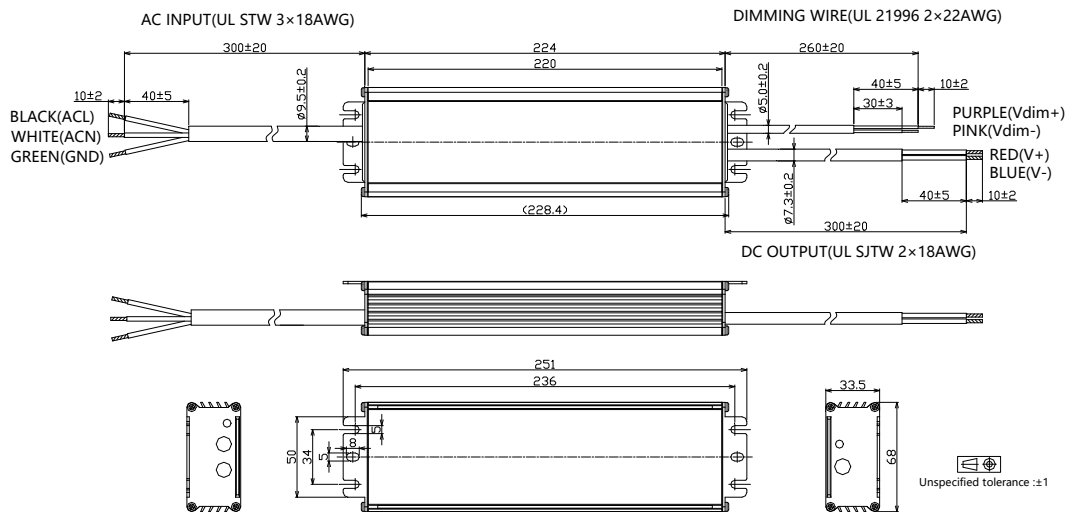


240W, 200-480Vac Input, Isolated Dimming LED Driver

- TLD-240-Cxxx-ER/ENU (UL Cable)

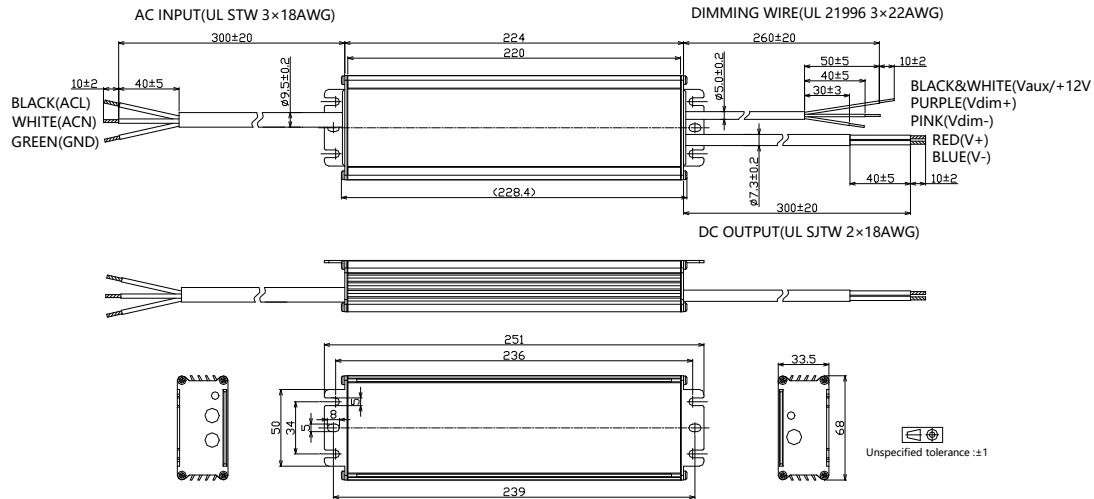


- TLD-240-Cxxx-ARU (UL Cable)

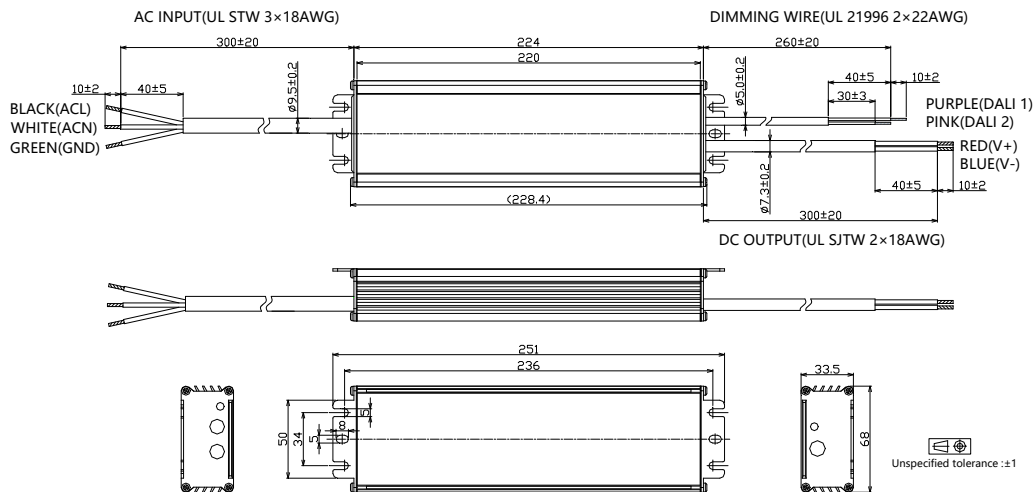


240W, 200-480Vac Input, Isolated Dimming LED Driver

- TLD-240-Cxxx-MRU (UL Cable)

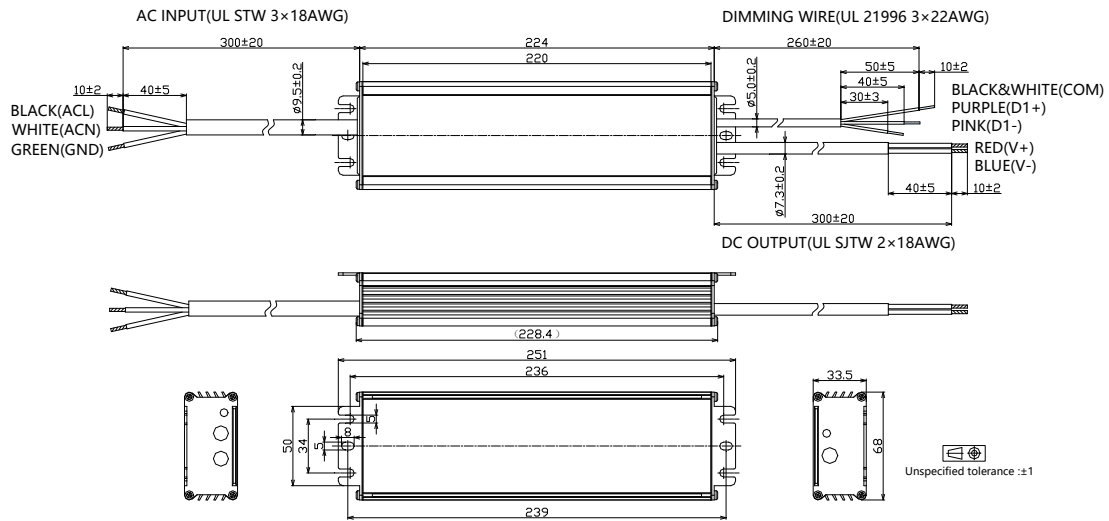


- TLD-240-Cxxx-NN/TRS (VDE Cable)

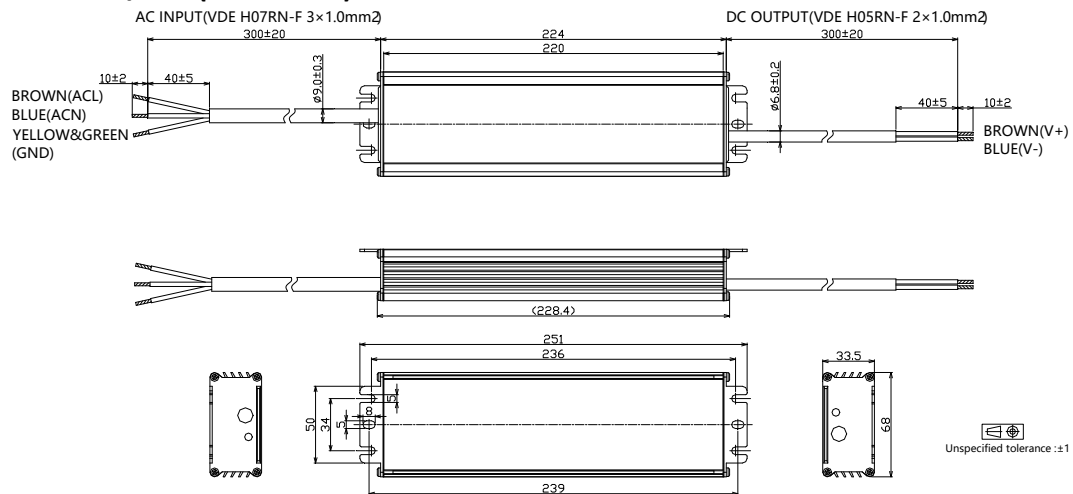


240W, 200-480Vac Input, Isolated Dimming LED Driver

- TLD-240-Cxxx-DN/DRS (VDE Cable)

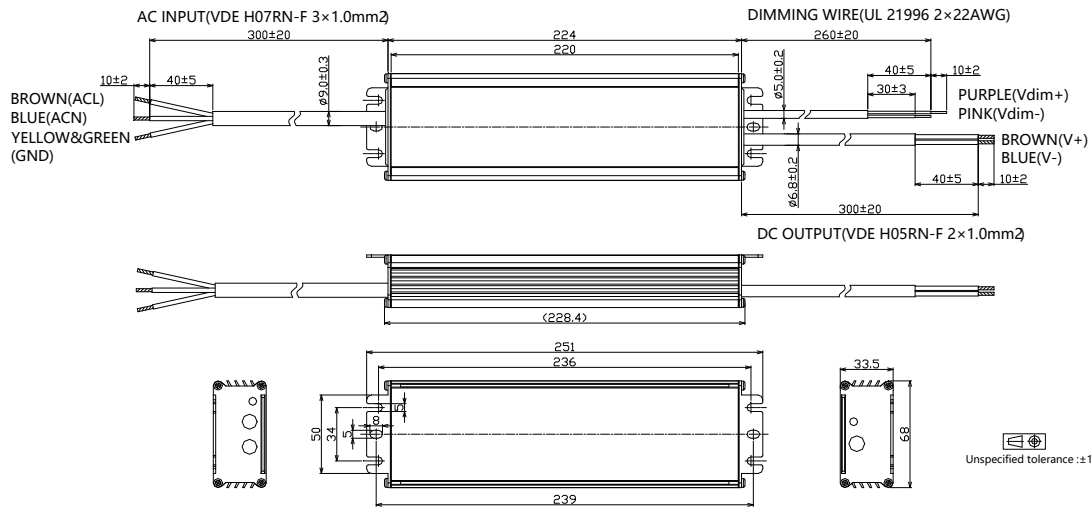


- TLD-240-Cxxx-EN/ERS (VDE Cable)

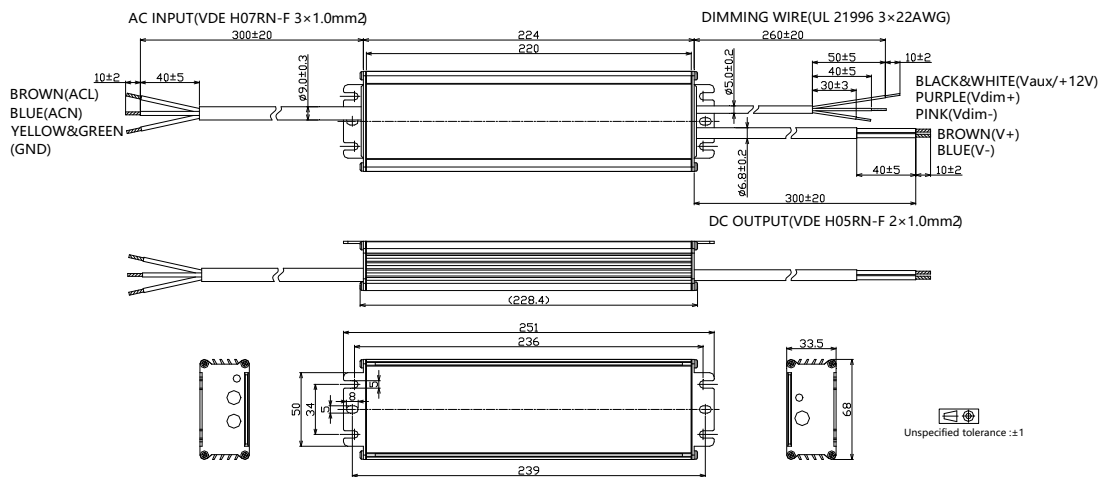


240W, 200-480Vac Input, Isolated Dimming LED Driver

- TLD-240-Cxxx-ARS (VDE Cable)

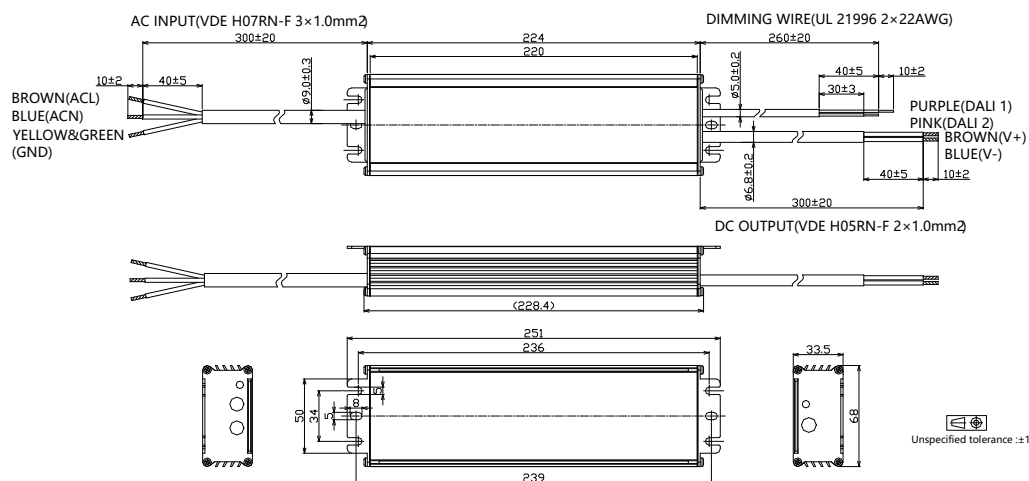

- TLD-240-Cxxx-MRS (VDE Cable)

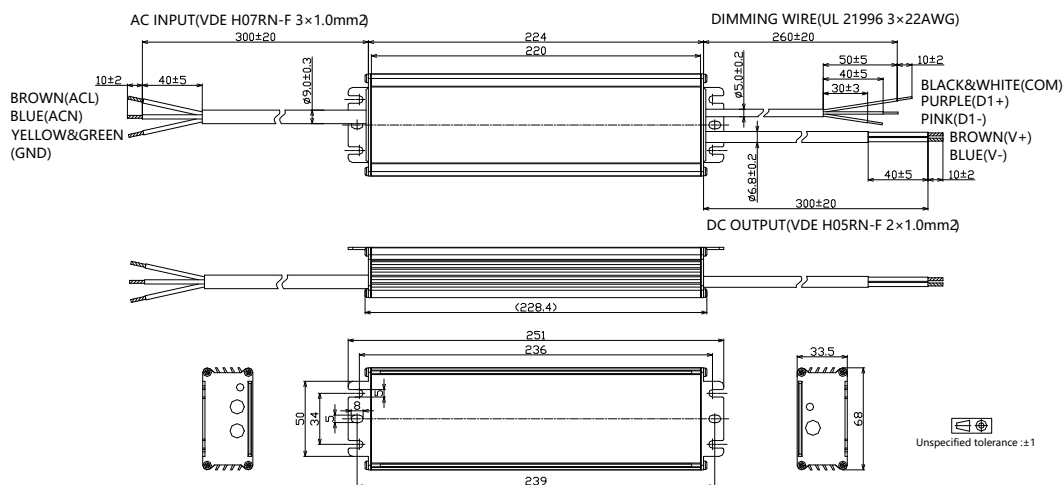

240W, 200-480Vac Input, Isolated Dimming LED Driver

■ Output Operation Range

Model	Typical Set Output Current (mA)	Max Output Power (W)	Output Voltage Min (V)	Output Voltage Max(V)	Minimum Dimming Current (mA)
-C140	1400	250	107	179	140
	1300	250	115	192	130
	1200	250	125	208	120
	1100	250	136	227	110
	1050	250	143	238	105
	1000	238	143	238	105
	950	226	143	238	105
	900	214	143	238	105
	850	202	143	238	105
	800	190	143	238	105
	750	179	143	238	105
	700	167	143	238	105
	...	...	...	...	...
	105	25	143	238	105

Model	Typical Set Output Current (mA)	Max Output Power (W)	Output Voltage Min (V)	Output Voltage Max(V)	Minimum Dimming Current (mA)
-C210	2100	250	71	119	210
	2000	250	75	125	200
	1900	250	79	132	190
	1800	250	83	139	180
	1700	250	88	147	170
	1600	250	94	156	160
	1500	250	100	167	150
	1400	250	107	179	140
	1300	232	107	179	140
	1200	214	107	179	140
	1100	196	107	179	140
	1000	179	107	179	140
	...	...	...	...	...
	140	25	107	179	140

240W, 200-480Vac Input, Isolated Dimming LED Driver

Model	Typical Set Output Current (mA)	Max Output Power (W)	Output Voltage Min (V)	Output Voltage Max(V)	Minimum Dimming Current (mA)
-C420	4200	250	36	60	420
	4100	250	37	61	410
	4000	250	38	63	400
	3900	250	38	64	390
	3800	250	39	66	380
	3700	250	41	68	370
	3600	250	42	69	360
	3500	250	43	71	350
	3400	250	44	74	340
	3300	250	45	76	330
	3200	250	47	78	320
	3100	250	48	81	310
	3000	250	50	83	300
	2900	250	52	86	290
	2800	250	54	89	280
	2700	241	54	89	280
	2600	232	54	89	280
	...	...	...	...	...
	280	25	54	89	280

Model	Typical Set Output Current (mA)	Max Output Power (W)	Output Voltage Min (V)	Output Voltage Max(V)	Minimum Dimming Current (mA)
-C690	6900	250	22	36	690
	6800	250	22	37	680
	6600	250	23	38	660
	6400	250	23	39	640
	6200	250	24	40	620
	6000	250	25	42	600
	5800	250	26	43	580
	5600	250	27	45	560
	5400	250	28	46	540
	5200	250	29	48	520
	5000	250	30	50	500
	4800	250	31	52	480
	4500	250	33	56	450
	...	...	...	...	...
	450	25	33	56	450

■ Revision History

Revision	Date	Contents
C	2022-03-22	1. Index page added 2. Reduced dimming interface sourcing current 3. DALI 2.0 compatibility added 4. Programming instruction added 5. Inrush current data added 6. Tc point position indication added 7. Dielectric strength level added 8. Packaging information added 9. Mechanical design change with dimming cable color 10. Revision history added
D	2022-12-14	1. DMX dimmable models mechanical design updated
E	2023-07-14	1. Update cable selection table in Model List Section
F	2023-09-15	1. Update model selection table with -DN,-EN,DR models
G	2024-07-25	1. Fast dimming description added 2. Power factor, THD, efficiency curves updated by 10-100% load range 3. MCB usage and driver quantity section added 4. Inrush current data updated