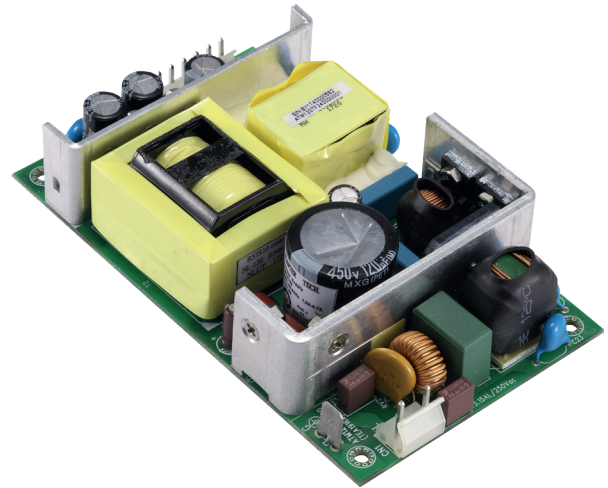


I.T.E / Medical Open Frame Power Supply

120 Watt IT/Medical Series | Open Frame

Features

- IEC/EN/ANSI/AAMI ES60601-1 (Edition 3.1)
- Means of Protection: 2 X MOPP
- Touch Current : < 100µA
- IEC/UL 60950-1
- 100-240VAC Universal Input
- Single Output to 120W
- Regulated Output With Low Ripple Noise
- Modified and Custom Design Available
- Green Mode
Meet CEC, DoE Level VI, ErP Stage 2, No Load
Power Consumption Less Than 0.21W


Model

Model	O/P Voltage	O/P Current	Watt
ATM120T- F120	12.0V	12.00A	120W
ATM120T- F150	15.0V	8.00A	120W
ATM120T- F190	19.0V	6.30A	120W
ATM120T- F240	24.0V	5.00A	120W
ATM120T- F300	30.0V	4.00A	120W
ATM120T- F480	48.0V	2.50A	120W

 ATM120T-**FXXX**

O / P Voltage ←

Input

Voltage	100-240VAC
Line Frequency	50/60Hz
Current	1.5A-0.7A
Protection	Internal Primary Current Fuse

Output

Load Regulation	±5% (Typical)
Ripple & Noise	1% Vp-p Max. for Output Voltage @ Full Load
Transient Response	0.5mS for 50% Load Change Typical
Hold-up Time	10mS @ Full Load
Protection	Short Circuit Protection / Over Voltage Protection / Over Current Protection / Over Temperature Protection

ATM120T-F Series

Safety Approvals

CB / UL / cUL / TÜV SÜD Mark / CE

Electrical

Topology	LLC
Dielectric Withstand	4000VAC Primary - Secondary
Touch Current	< 100µA
MTBF	300,000 Calculated Hours at 25°C , by Telcordia SR-332

Environmental

Operating Temperature	0 to +50°C
Storage Temperature	-20 to +80% RH
Relative Humidity	Operating : 20 to 80% RH Storage : 10 to 90% RH
Cooling	Natural Convection Cooling

Mechanical

Case Dimension	L127 × W76 × H30.5 (mm)
	5" × 3" × 1.2"
Weight	300g (Ref.)