

LED Power Supply

Constant Voltage LED Driver | Input 90-132V AC | Output voltage 24V DC

Linear type LED drivers, Class 2 Standard. short circuit, overload and over temperature protection. Lifetime 30,000hrs. UL listed, helpful for profile aluminum and lightbox.



Items	Conditions	Request	Note
-------	------------	---------	------

1. Input

Input voltage	Ta	AC90-132 V	
Input frequency		50/60Hz	--
Input current	25°C, rated input voltage, output with max. rated power	<0.8A	--
Input power		<70W	--
Efficiency		≥88%	--
Standby	25°C, rated input voltage, output without load	<0.5W	average
Inrush current	25°C, rated input voltage	<50A	peak
PF	25°C, rated input voltage, output max. rated power	≥0.95	--

2. Output

Startup time	25°C, rated input voltage, output with max. rated power	<1s	--
Output voltage and precision	Ta, rated input voltage, output with rated power	24V±5%	--
Output current range	Ta, rated input voltage	0 – 2.5A	60W
Output voltage wave	25°C, rated input voltage, output with max. rated power	500mV	Vp-p
Output overload	25°C, rated input voltage, output with 2 times LED load	yes	--
Output current and precision	Ta, rated input voltage, output with rated power	--	--
Rated output voltage range	Ta, rated input voltage,	--	--
Output current wave	25°C, rated input voltage, output with max. rated power	--	Ip-p
Dimming mode	--	--	--
Dimming range	--	--	--

3. Temperate and others

Operation temp.	--	-20°C-45°C	--
Relative humidity	--	45%-85%	--
Max. case temp.	--	80°C	--
Lifetime	Max.Ta, rated input voltage, output with max. rated power	30,000hr	--
Working noise	25°C, rated input voltage, output with rated power ,mute box backgroun noise<35dB, pickup 10cm distance from products	yes	--

4. Mechanical, mounting

Case material and size	Plastic
Mounting ways	Independent
Insulation type	Class 2
IP grade	IP20
Input cables dimension	SPT-2 18AWG
Output cables dimension	SPT-2 18AWG
Output cables length	Max. 2M


5. Protection

Open circuit	Ta, rated input voltage, no load	--	--
Over load	Ta ,0.94-1.06 times of input voltage, 1.2 times of rated power	yes	--
Short circuit	Ta ,0.94-1.06 times of input voltage	yes	--
Over temperature	Ta ,0.94-1.06 times of input voltage, temperature detected pointed more than 115 degree	yes	--
Over voltage	Ta ,0.94-1.06 times of input voltage, output voltage is 1.5 times of rated one	yes	--
Auto recovery	Over load, short circuit revocation	yes	--
Latch off	Over voltage, over heat re-start after cut off	--	--

6. Standard

Safety	UL8750
Harmonic	--
EMI	FCC PART15 CLASSB
EMS	--

7. Dimensions in mm

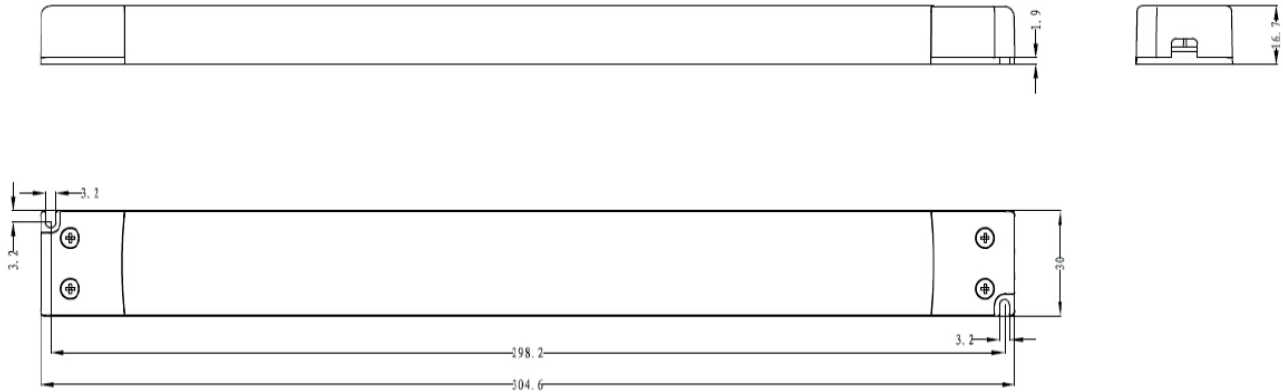

8. Wiring Diagram

